




Selector switch non spring ret

SK600

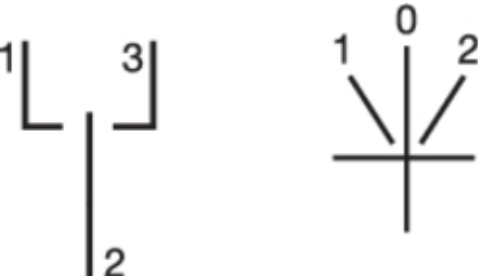

Architecture	
Number of poles	1 P
Controls and indicators	
Number of positions of the switch	3
Main electrical features	
Rated operational voltage Ue	400 V
Frequency	50 Hz
Voltage	
Rated insulation voltage	690 V
Electric current	
Rated current	20 A
Power	
Total power loss under IN	0,7 W
Dimensions	
Depth of installed product	64 mm
Height of installed product	85 mm
Width of installed product	53 mm
Connection	
Connection cross-sect. flexible conductor	1,5 / 10mm²
Connection cross-sect. rigid cable	1 / 6mm²
Number of contacts	1
Type of contacts	NO-NC
Type of connection	with screw

Safety

Protection index IP	IP20
---------------------	------

Use conditions

Operating temperature	-10 40 °C
Storage/transport temperature	-40 80 °C