


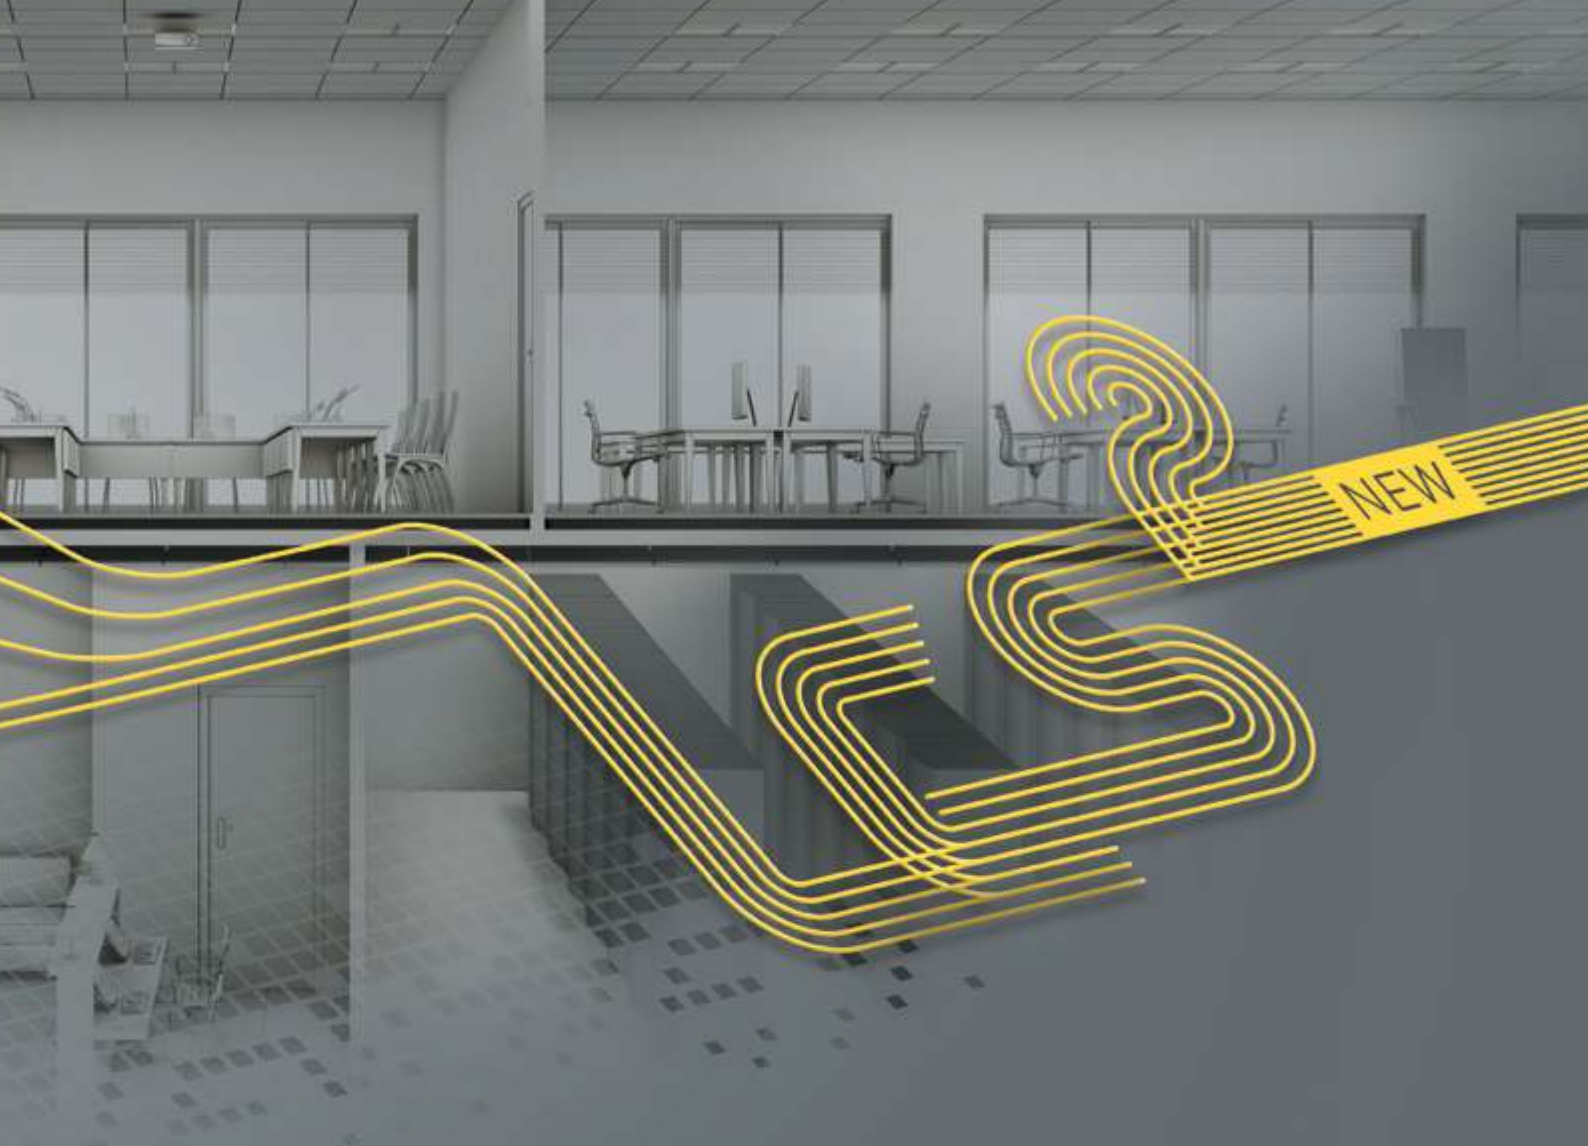

LEGRAND CABLING SYSTEM²

PERFORMANCE

FROM TECHNICAL ROOM
TO WORKSTATION

 **legrand**[®]



LEGRAND CABLING SYSTEM²



Solutions from technical room to workstation

See pages 02 to 13



LCS² copper

See pages 15 to 21



LCS² fibre optic

See pages 22 to 27



LCS² enclosures

See pages 28 to 37



LCS² workstation

See pages 38 to 47




LCS² services

See pages 48 to 51

Catalogue references

See pages 52 to 103

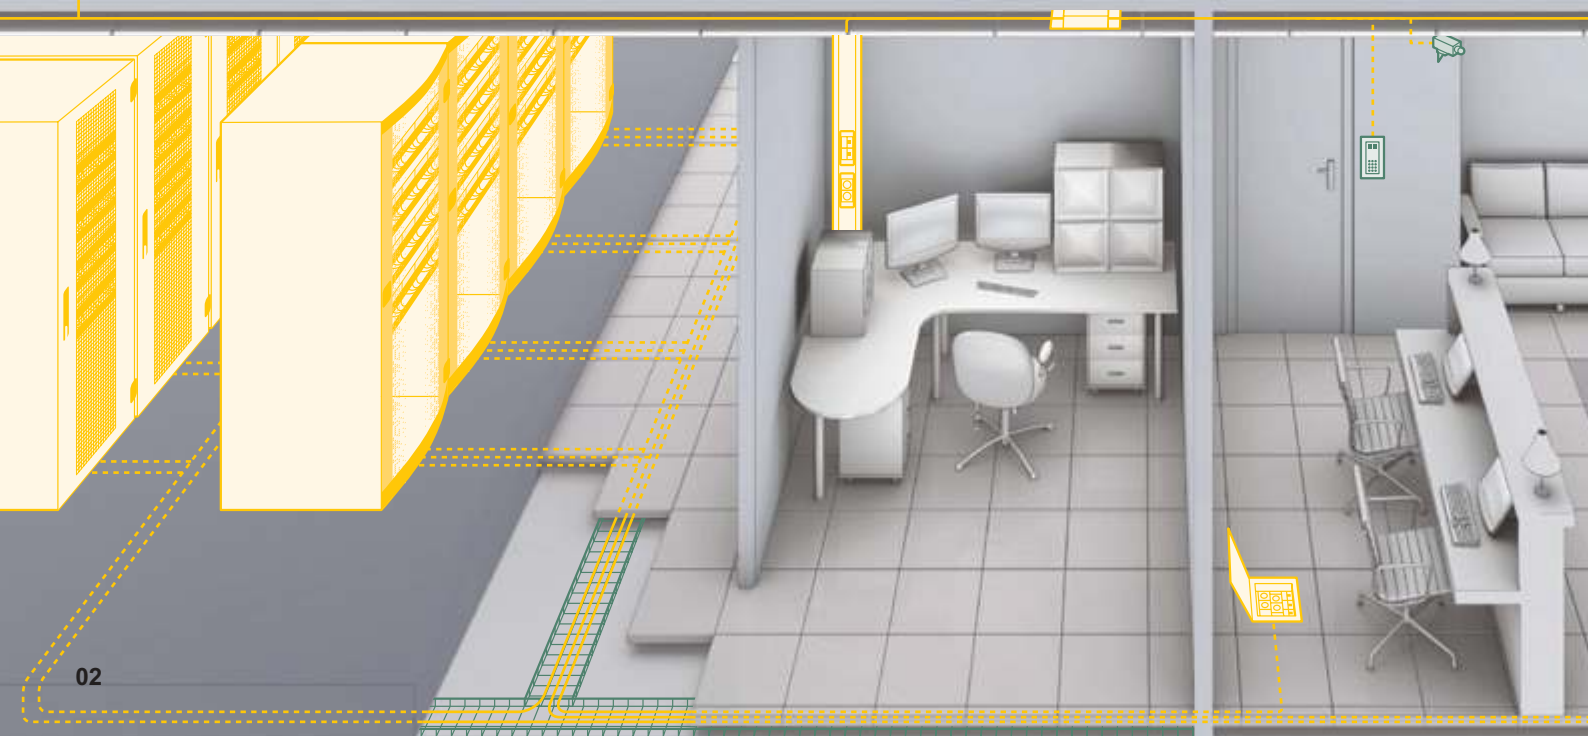



LCS²

from technical room to workstation

LCS²

■ LCS² Cabling system products

Complete systems with a 20-year guarantee.

The new LCS² cat. 6A (up to 500 MHz), cat. 6 (up to 250 MHz) and cat. 5e (up to 100 MHz) systems have been designed as coherent entities to optimise their performance.

The systems are suitable for optical fibre cables as well as copper cables.

See pages 14 to 37

■ Legrand Synergies

The new LCS² systems integrate perfectly in the various other Legrand solutions: DLP trunking system, cabling accessories, cable management, etc.

See pages 40 to 51

Towards network convergence.

The IP convergence products (IP telephony, IP remote monitoring, IP access control) can also be a part of the LCS² systems.



LCS²
APPLICATION
EXAMPLE

OFFICE



Area distribution box



RJ 45 socket



Access control



Patch panel





LCS²
APPLICATION
EXAMPLE
**MALL
CENTER**



Switch Mosaic



Cablofil wire mesh




Cabling unit




Fibre optic socket



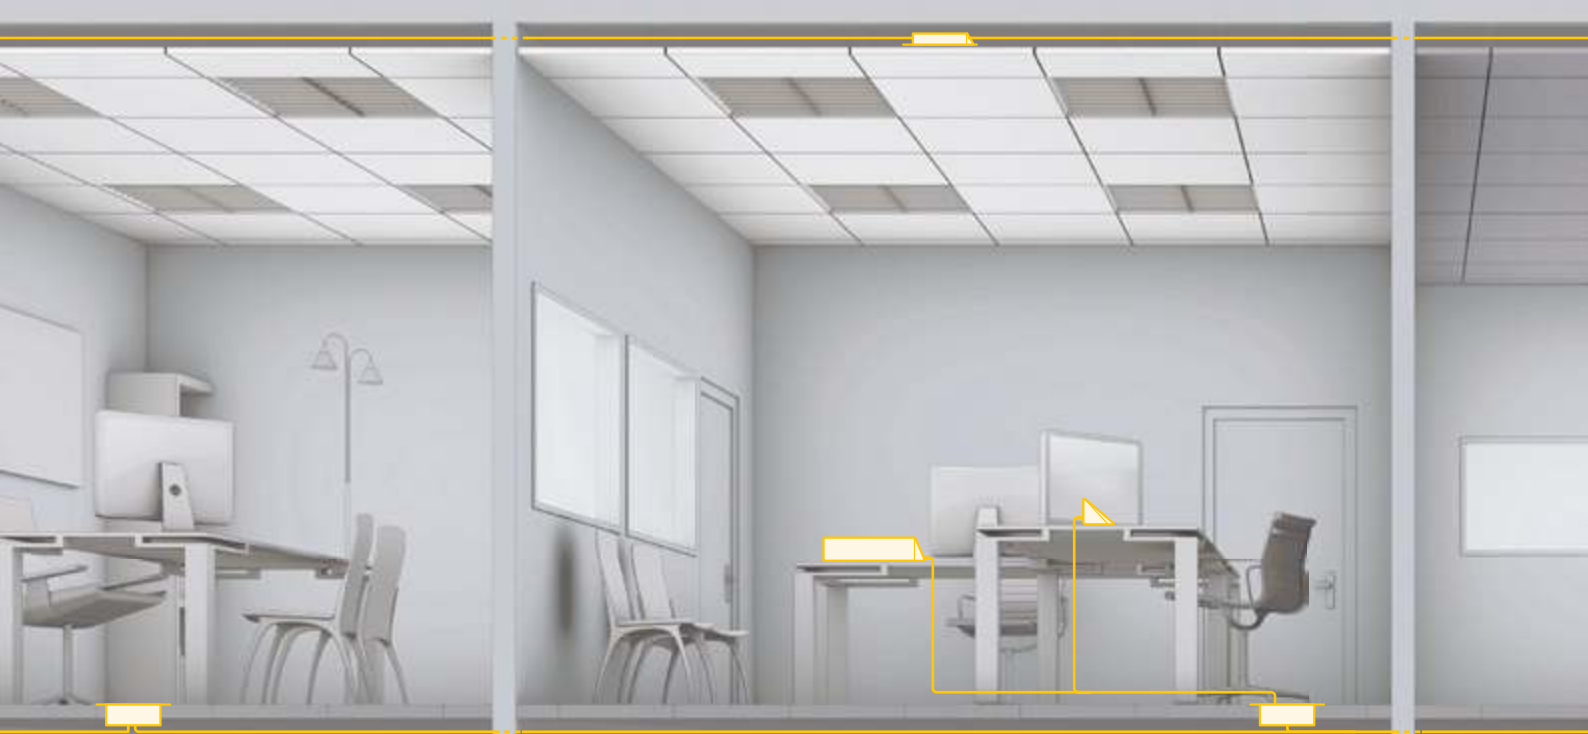

LCS²
APPLICATION
EXAMPLE

CAMPUS



AVS socket



DLP trunking system



Wi-Fi access point



RJ 45 with controlled access





LCS²
APPLICATION
EXAMPLE

HOTEL



RJ 45 sockets 45°



Retractable RJ 45 socket



Patch cord



19" wall-mounting cabinet



System guaranteed performance of the Legrand systems

Measurements of LCS² components and links, validated by independent laboratories 3 P Third Party Testing and ETL, have highlighted its triple performance.

Performance of the transmission in cat. 6A, performance of the installation, performance of the maintenance.

1 Performance of the transmission in cat. 6A

For long distance, 10 Giga guarantees only slight signal loss for 100 m. For short distance, 10 Giga guarantees a good echo resistance for 15 m.

2 Performance of the installation

The values measured widely exceed the requirements of the ISO 11801 standard, Edition 2, amendment 2, thus providing a safety margin to conform to the most rigorous constraints of the installation.

3 Performance of maintenance


Being committed to deliver a durable LCS² system, Legrand gives a 20-year guarantee on its performance.



Note: all LCS² products are RoHS compliant.

Category 6A	Network protocol supported	COMPONENT MEASUREMENT		LINK MEASUREMENT (CHANNEL)	
		STP		Class EA / cat. 6A	
		500 MHz	250 MHz	500 MHz	250 MHz
		10 Giga	1 Giga	10 Giga	1 Giga
 Attenuation (dB) Loss of signal	LCS ²	0.13	0.06	35.4	24.1
	ISO 11801 Standard, Edition 2, Amendment 2 ⁽²⁾	0.45 max.	0.32 max.	42.1 max.	28.9 max.
	TIA/EIA-568-C.2	0.45 max.	0.32 max.	49.3 max.	33.9 max.
 Return Loss (dB) Echo resistance	LCS ²	17.05	26.59	16.4	22.1
	ISO 11801 Standard, Edition 2, Amendment 2 ⁽²⁾	14 min.	20 min.	8 min.	10 min.
	TIA/EIA-568-C.2	14 min.	20 min.	6 min.	8 min.
 Next (dB) Resistance to interference between pairs⁽¹⁾	LCS ²	37.46	56.93	38.1	54
	ISO 11801 Standard, Edition 2, Amendment 2 ⁽²⁾	37 min.	46 min.	29.2 min.	35.3 min.
	TIA/EIA-568-C.2	34 min.	46 min.	26.1 min.	33.1 min.
 ACR-N (dB) (Alien Crosstalk Ratio) Actual power supplied	LCS ²	37.33	56.87	2.7	29.9

[1] Measurements taken on the 3-6 and 4-5 pairs [2] Values taken from the draft of the ISO 11801 standard Edition 2 amendment 2


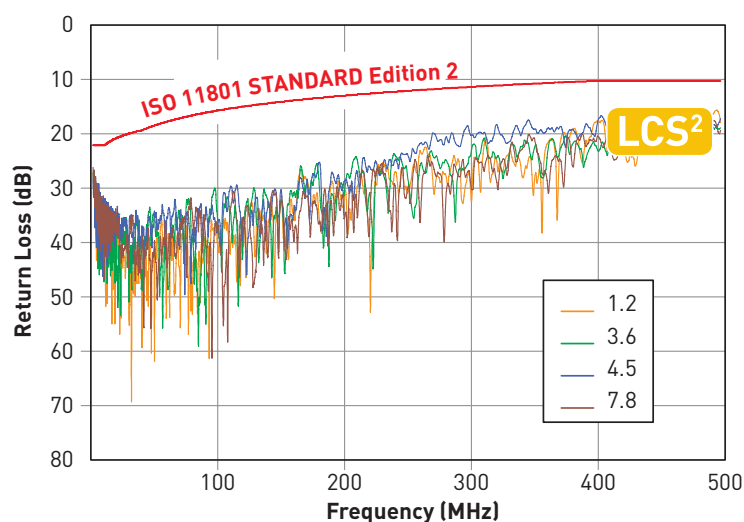


Measurement of the Return Loss on a class E_A link

On each pair, the performances of LCS² are significantly higher than the values required by the ISO 11801 Standard, Edition 2, amendment 2.

Category 6		COMPONENT MEASUREMENT			LINK MEASUREMENT (CHANNEL)
		STP	FTP	UTP	Class E / cat. 6
		250 MHz	250 MHz	250 MHz	250 MHz
		1 Giga	1 Giga	1 Giga	1 Giga
	Attenuation (dB)	LCS ²			
	Loss of signal	ISO 11801 Standard, Edition 2, Amendment 2 ⁽²⁾			
		TIA/EIA-568-C.2			
	Return Loss (dB)	0.09	0.09	0.09	25.7
	Echo resistance	0.32 max.	0.32 max.	0.32 max.	30.7 max.
		0.32 max.	0.32 max.	0.32 max.	35.9 max.
	Return Loss (dB)	29.8	29.8	29.8	38.8
	Echo resistance	16 min.	16 min.	16 min.	10 min.
		16 min.	16 min.	16 min.	8 min.
	Next (dB) Resistance to interference between pairs ⁽¹⁾	LCS ²			
		ISO 11801 Standard, Edition 2, Amendment 2 ⁽²⁾			
		TIA/EIA-568-C.2			
	Next (dB) Resistance to interference between pairs ⁽¹⁾	51.3	51.3	51.3	53.9
		46 min.	46 min.	46 min.	35.3 min.
		46 min.	46 min.	46 min.	33.1 min.
	ACR-N (dB)				
	(Alien Crosstalk Ratio)	LCS ²			
	Actual power supplied	51.21	51.21	51.21	28.2

(1) Measurements taken on the 3-6 and 4-5 pairs (2) Values taken from the draft of the ISO 11801 standard Edition 2 amendment 2

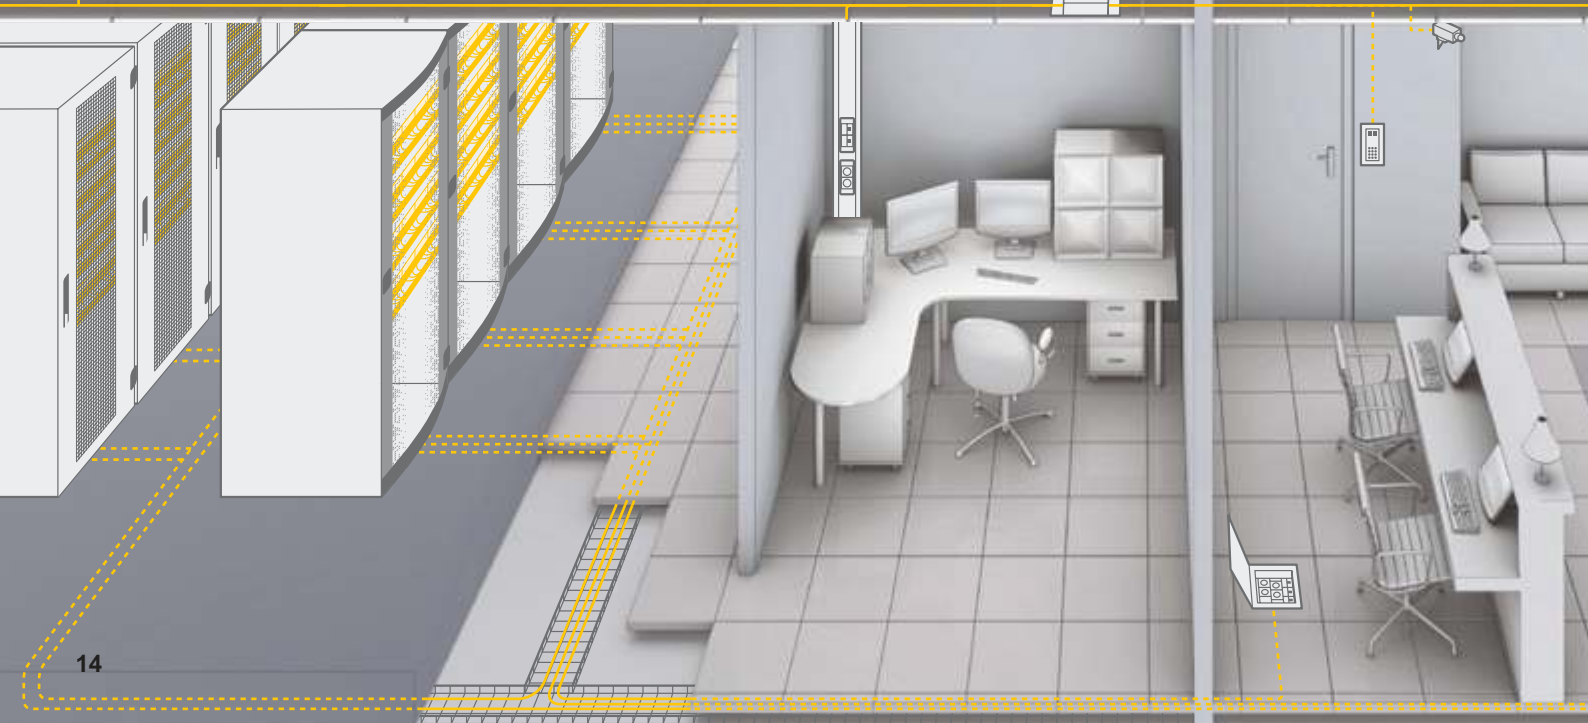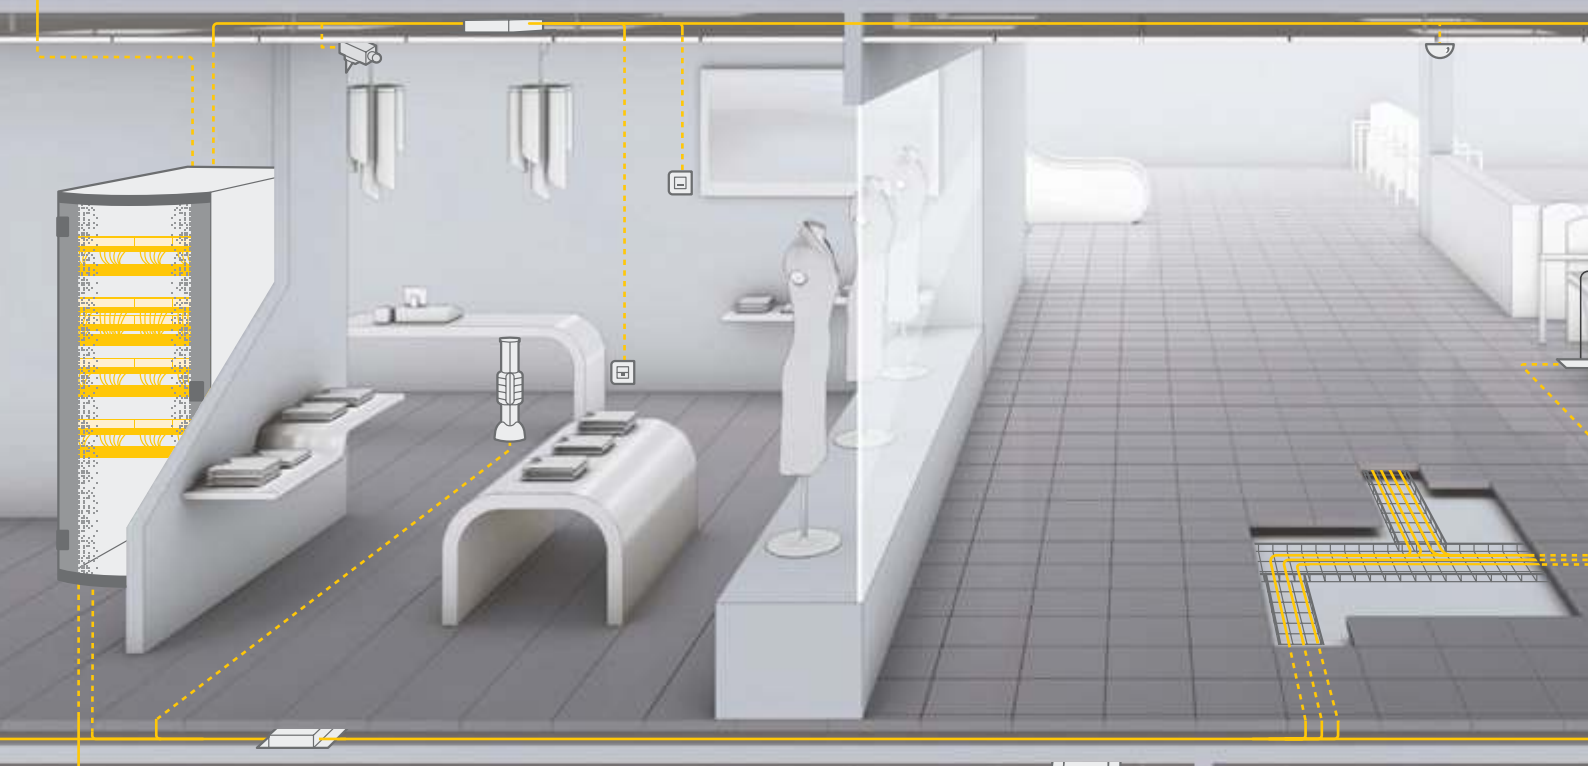



LCS² COPPER

A complete system up to 10 Gbits/s




Connectors
See pages 16 to 17



Patch panels
See pages 18 to 19



Patch cords and cables
See pages 20 to 21

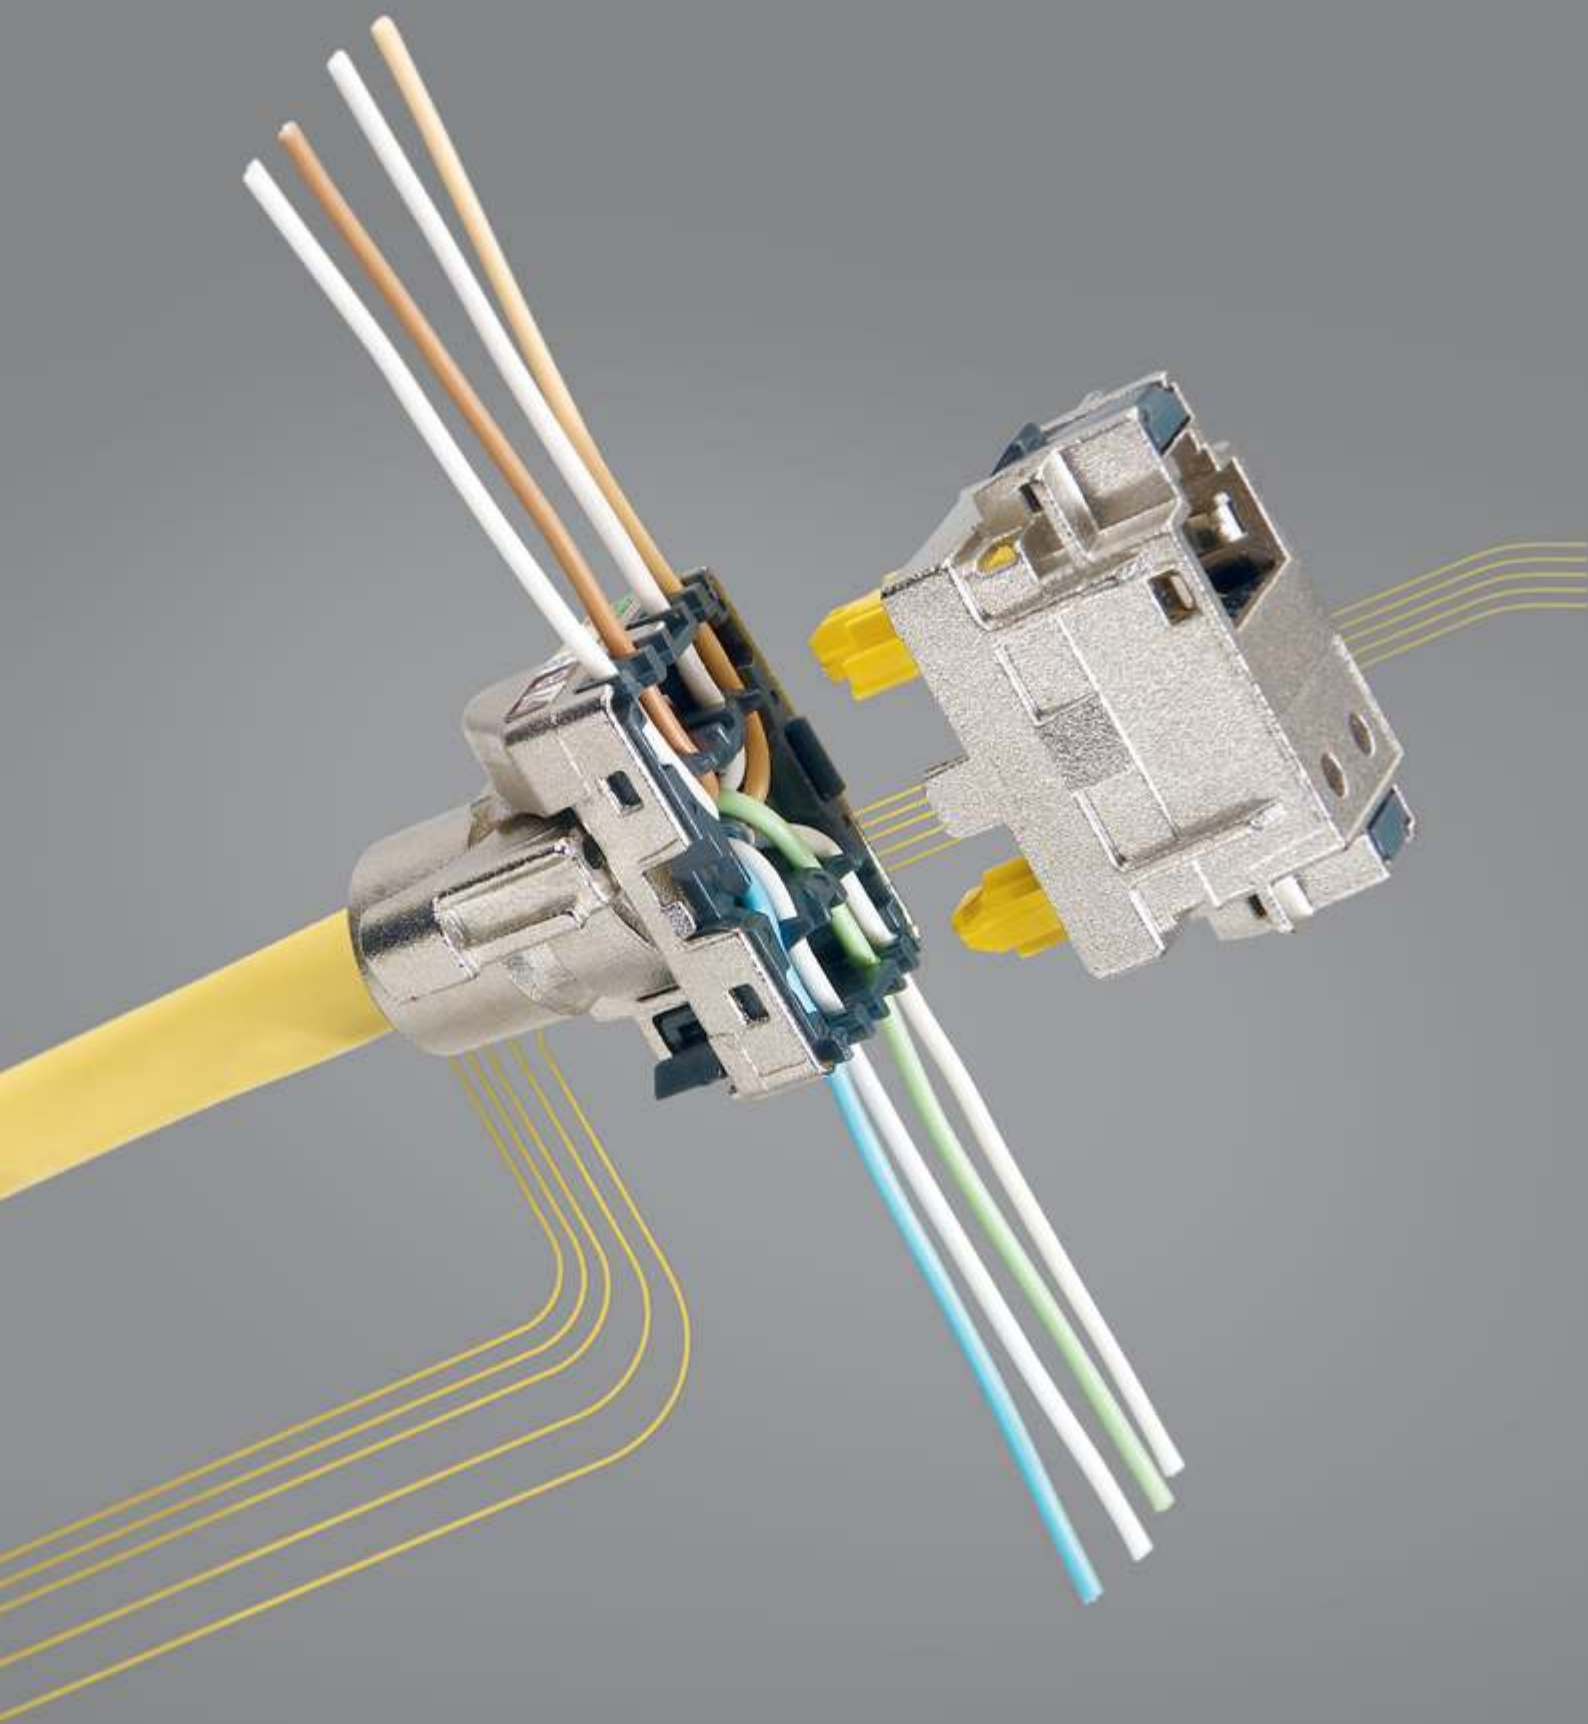


New LCS² connector

Performance of the installation


RJ 45 connector is the core element contributing to the performance of the LCS² system.

You can obtain a perfect connection within a few seconds guaranteeing an optimum performance of the link from the patch panel to the RJ 45 socket (see page 44).




Insert the cable in the rear part

Visibility of the marking as per the TIA/EIA code. Takes all cables currently available on the market: U/UTP, F/UTP and SF/UTP.




Separate and insert the strands

Intuitively maintain 13 mm, no need to measure.



Add the upper part of the connector

The tamperproof insert gives ease of movement.



Turn to guarantee the connection

Simply turn to flatten the strands simultaneously. Cut them, and the connector is ready!



LCS² Patch panels

Performance of maintenance

The design of the new LCS² patch panels optimises the mounting and maintenance.

Maintaining the cables with cable guides, blocks of 6 RJ 45 connectors, clipping and unclipping each connector from the front panel.




Better fixing by clamp

Cable maintained in its cable guide.




Room for maintenance

Simple unclipping of LCS² connectors.



Fast clipping of the patch panel.



Panels provided with quick-fixing system

Universal mounting any rack or cabinets.

The new LCS² panels can also be fitted with:



Telephone block



FC type video broadcast block



LC fibre optic cassette

Legrand cables and cords

coherence and performance

To ensure total coherence of its LCS² cat. 6A, cat. 6 and cat. 5e systems,

Legrand offers a range of 4 twisted pair cables
in the four types: U/UTP, F/UTP, S/FTP, SF/UTP.

■ High-quality manufacturing

Manufactured to high quality standards,
with thicker insulation to reduce the effects
of crosstalk, and reduction of the twist pitch of the pairs:
the quality of Legrand cables is suitable for the LCS²
category 6A, category 6 and category 5e systems,
ensuring high performance from the patch panel right
through to the RJ 45 socket. What's more, Legrand offers
its cables in 2 versions with sheaths suitable for different
environments: LSZH and PVC. The 3P laboratory
has certified all the Legrand cables to be compliant
with the ISO IS 11 801, EN 50173-1 standards
and TIA/EIA-568-C.2.


[See catalogue pages](#)



Legrand cat. 6A F/UTP cable.




Legrand cat. 6 F/UTP cable.



Legrand cat. 6 SF/UTP cable.

	SHEATH	MARKING	STORAGE/TRANSPORT TEMPERATURE	OPERATING TEMPERATURE
CAT. 7 S/FTP CABLE 100 OHMS	LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Ø 7.5 mm - Colour yellow RAL 1018	LEGRAND 32777 4 pair 23 AWG S/FTP 100 ohms LSZH CAT. 7 900 MHz - VERIFIED TO ISO 11801 IEC 60332-1 EN 50173 - TIA/EIA 568C - VPN/NVP% Batch no. + length in metres	0 to +50 °C	-20 to +60 °C
CAT. 6A F/UTP CABLE 100 OHMS	LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Ø 7.8 mm - Colour yellow RAL 1018	LEGRAND 32778 4 pair 24 AWG F/UTP 100 ohms LSZH CAT. 6A 500 MHz - VERIFIED TO ISO 11801 IEC 60332-1 EN 50173 - TIA/EIA 568C - VPN/NVP% Batch no. + length in metres	0 to +50 °C	-20 to +60 °C
CAT. 6 U/UTP CABLE 100 OHMS	PVC or LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Ø 6.4 mm - Colour blue RAL 5015	LEGRAND (4 pair or 2x4 pair) 24 AWG UTP 100 ohms 250 Mhz (PVC or LSZH) CAT. 6 250 MHz - EC VERIFIED TO ISO 11801 IEC 60332-1 EN 50173-1 TIA/EIA 568A Batch no. + length in metres	0 to +50 °C	-20 to +60 °C
CAT. 6 F/UTP CABLE 100 OHMS	PVC or LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Synthetic water repellent tape Ø 7 mm - Colour blue RAL 5015	LEGRAND (4 pair or 2x4 pair) 24 AWG FTP 100 ohms 250 Mhz (PVC or LSZH) CAT. 6 250 MHz - EC VERIFIED TO ISO 11801 IEC 60332-1 EN 50173-1 TIA/EIA 568A Batch no. + length in metres	0 to +50 °C	-20 to +60 °C
CAT. 6 SF/UTP CABLE 100 OHMS	PVC or LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Synthetic water repellent tape Ø 7.7 mm - Colour blue RAL 5015	LEGRAND 4 pair 24 AWG SFTP 100 ohms 250 Mhz (PVC or LSZH) CAT. 6 250 MHz - EC VERIFIED TO ISO 11801 IEC 60332-1 EN 50173-1 TIA/EIA 568A Batch no. + length in metres	0 to +50 °C	-20 to +60 °C
CAT. 5e U/UTP CABLE 100 OHMS	PVC or LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Ø 5.2 mm - Colour light grey RAL 7035	LEGRAND CAT.NO (4 pair or 2x4 pair) 24 AWG UTP 100 ohms (PVC or LSZH) CAT. 5e EC VERIFIED TO ISO 11801 IEC 60332-1 EN 50173-1 TIA/EIA 568A Batch no. + length in metres	-15 to +70 °C	+5 to +40 °C
CAT. 5e F/UTP CABLE 100 OHMS	PVC or LSZH in accordance with NFC 32062 with flame retardant effect in accordance with IEC 60332-1 & NFC 32070 2.1 Ø 5.5 mm - Colour light grey RAL 7035	LEGRAND CAT.NO (4 pair or 2x4 pair) CAT. 5e EC VERIFIED TO ISO 11801 IEC 60332-1 EN 50173-1 TIA/EIA 568A Batch no. + length in metres	-15 to +70 °C	+5 to +40 °C

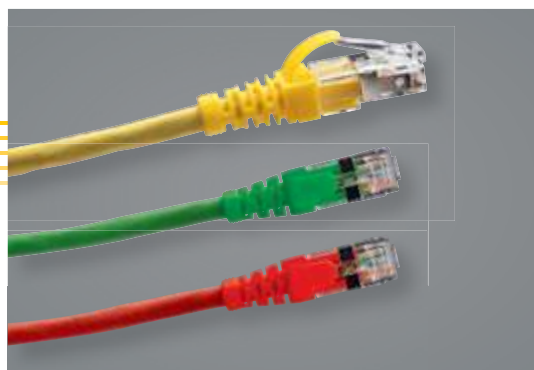

Ensure high-quality continuity: perfect plug connection and transmission performance... Available in several colours.

■ Individually tested cords


Legrand patch cords ensure high-quality continuity in a cabling system like other components. Legrand therefore takes the same care with the quality of its complete range of RJ 45 cords, which are certified by the 3P laboratory as compliant with the standards. [See catalogue pages](#)

■ Tests on all parameters

Legrand cords are individually tested, both for continuity and transmission performance. All the parameters are measured: CR, ACR, NEXT, Return loss, Attenuation, etc. Cords which do not meet the criteria are rejected. These tests guarantee transmission performance from one end of the system to the other, with both class D and class E.

■ Universal cords

Available in cat. 6A, cat. 6 and cat. 5e versions and in the three cabling types (U/UTP, F/UTP and SF/UTP). Legrand cords are available in different lengths, thus offering considerable flexibility of use.

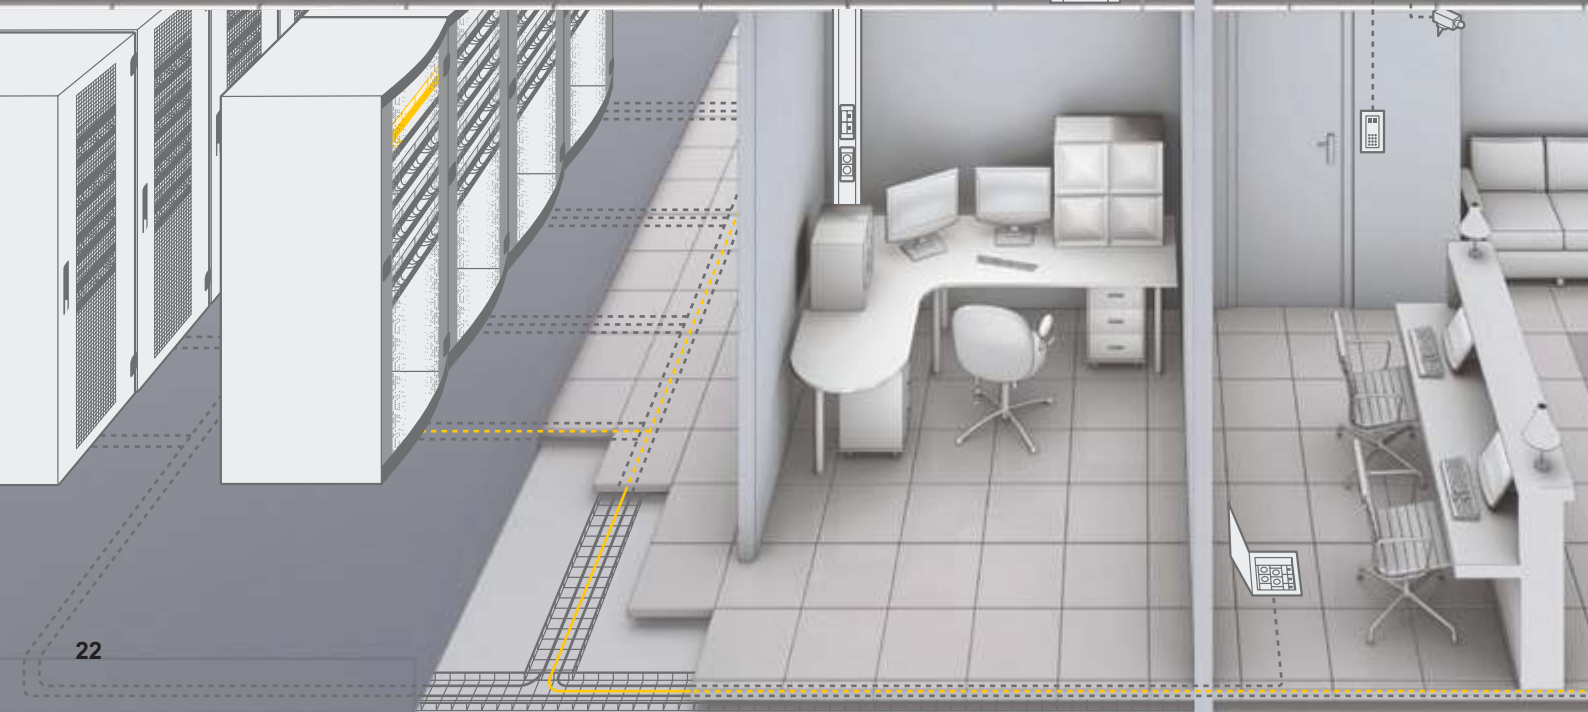



LCS² FIBRE OPTIC


A simple and reliable option



Fibre optic drawers
See pages 24 to 25



Connecting fibres
See pages 26 to 27

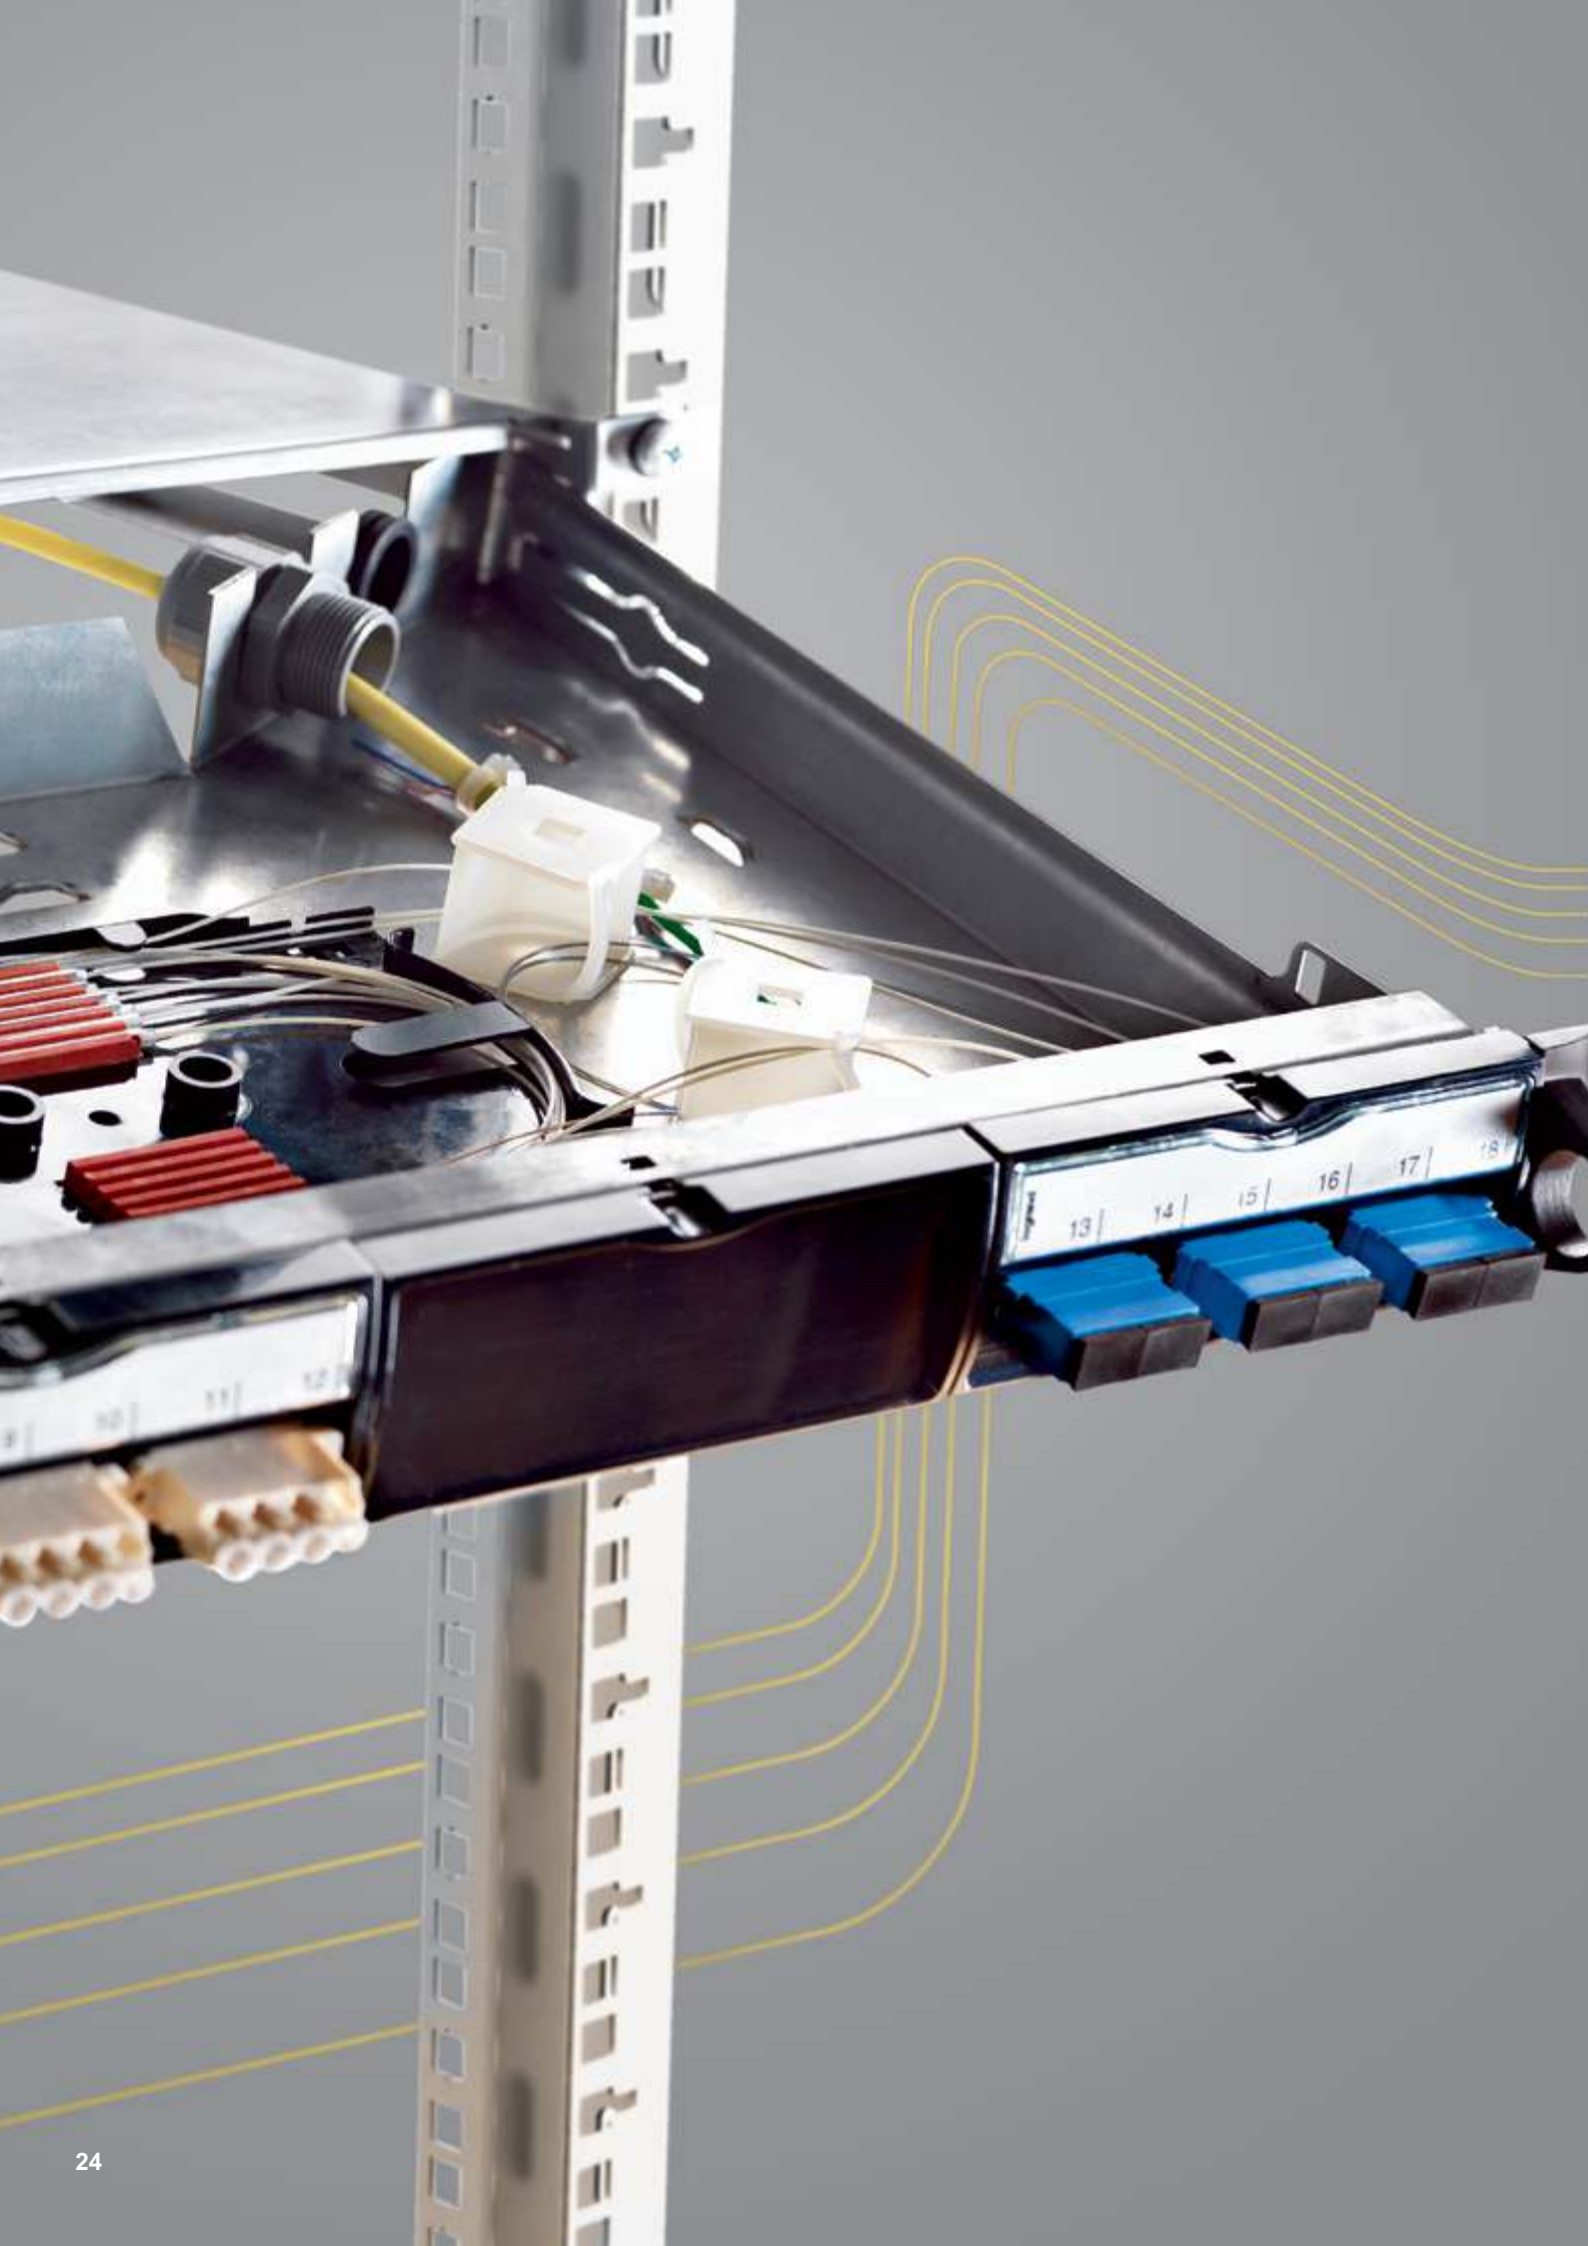

LCS² Fibre optic drawer

Complete accessibility and ease in coiling

The new LCS² Fibre optic drawer gives a better comfort in installation and maintenance.

Reinforcements facilitating the opening and closing, end stop inclined at 30° for complete accessibility, coiling the fibres ensured by the in-built coiling accessories...




19" Fibre optic drawer

Up to 4 fibre optic blocks can be fitted:
from 24 fibres ST or SC, 48 fibres LC.
Equipped with grip handles.
Height: Modular 1U.




19" High density fibre optic drawer

Up to 3 fibre optic blocks can be fitted:
from 36 fibres ST or SC, 72 fibres LC.
Equipped with grip handles.
Height: Modular 1U.



Total accessibility
End stop, inclined at 30°.



Easier cable management.
Integrated coiling accessories.
Rear in the form of a tail
to facilitate connection of incoming
cables.

**Can take all
fibre optic
connector
blocks**



LC connector block
19" Fibre optic drawer



SC connector block
19" Fibre optic drawer



SC connector block
19" High density fibre optic drawer

Connecting fibres

Legrand simplicity and performance


Legrand solutions, including the rapid crimping connection process and pre-fitted fibre optic links on demand have made a significant contribution to placing fibre optics within the reach of installers, particularly for links within buildings or between buildings, over distances of less than two kilometres.




Split the fibre



Cleave the fibre



Inspect the fibre



Insert the fibre

■ Connection takes just 3 minutes with Legrand rapid connectors

The average time for making this connection is less than 3 minutes with rapid connectors Cat.Nos 331 06 to 331 13 incorporating a factory pre-polished fibre. After the operations to prepare the fibre, there is no longer any need to glue or polish, or to check the quality of the connection under a microscope! No oven, no drying. The factory pre-polished connectors and the crimping tool ensure that the operation is simple and results in a high-quality connection.

Tip

Consider leaving some fibres in reserve for future development of the installation. If you require 2 or 4 fibres now, install cables with 6 or 8, or if you require 6 to 8 fibres now, install cables with 10 to 12.



Align the fibre



Crimp the fibre

Pre-fitted fibre optic

Pre-fitted fibre optic links on demand: save time and cut risk to a minimum.

Order your own individual solution: pre-fitted and factory tested, it will save you time on site while ensuring a high level of link reliability. This minimises the risk of malfunction during the installation, thereby simplifying the acceptance test.

What is delivered?


Each link is supplied with a test report. Length stands from connector to connector, in metres. Links up to 50 m are conditioned in boxes (reel optional) and those over 50 m are supplied by reel. Connectors are protected by a sheath. Pulling ring included. Multimode 62.5/125 μm cable complies with OM1 category, 50/125 μm with OM2 or OM3 category and single mode with OS1 category.



How to order

1. Once your preparatory installation work is done, determine the required length of cable.
2. Indicate the required type of fibre:
 - indoor, indoor/outdoor or outdoor
 - multimode 62.5/125 μm or 50/125 μm or single mode 9/125 μm
 - number of cores (4, 6, 12, 24 for indoor applications, outdoor applications and indoor/outdoor applications)
3. Specify the type of connector: ST, SC or LC.
4. State your preferred form of delivery: box or reel.

For further
information
Please contact us!

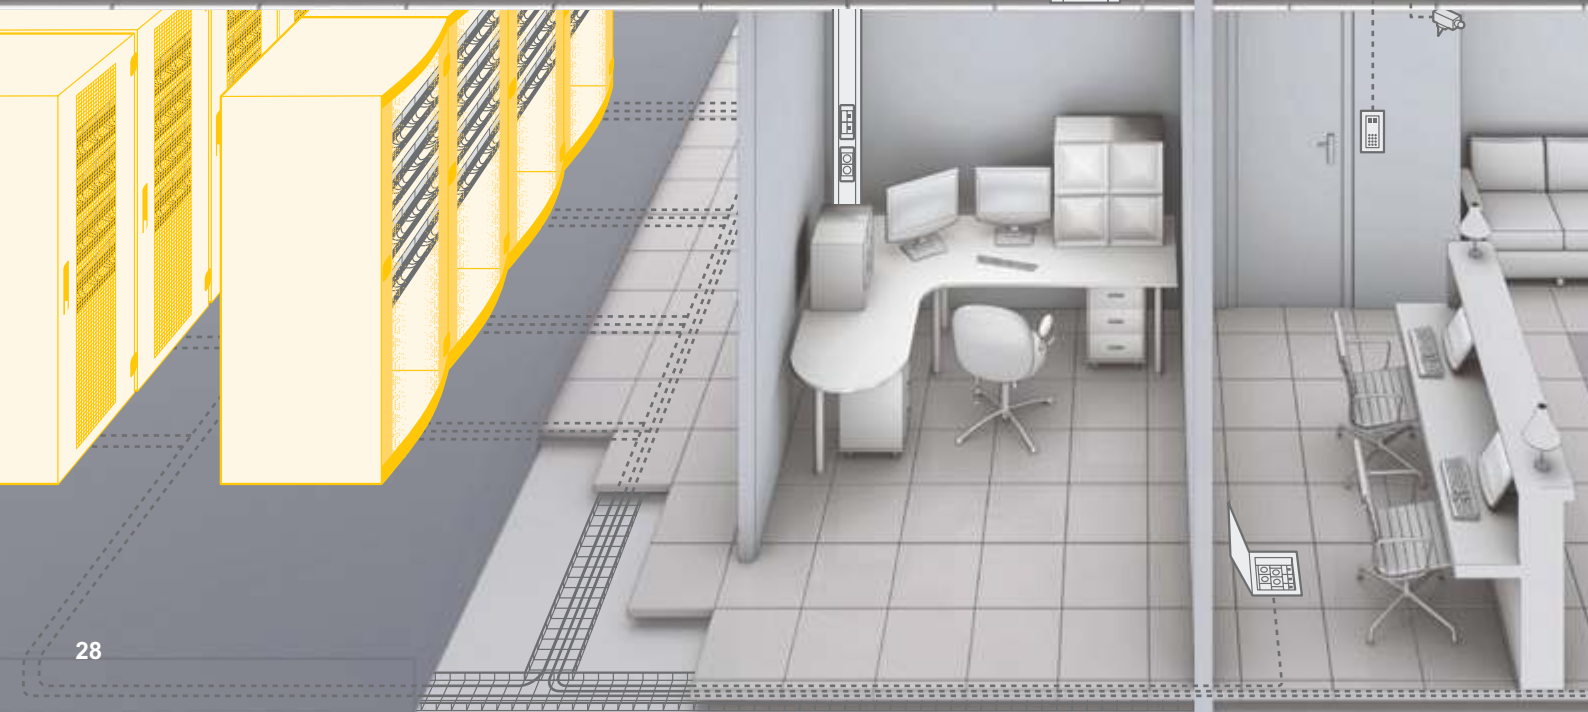



LCS² ENCLOSURES AND CABINETS

Easy installation
and efficient
maintenance



Enclosures
See pages 30 to 33



Server enclosures
See pages 34 to 35



**Wall mounted
cabinets**
See pages 36 to 37



19" LCS² enclosures

Optimised management of cables and patch cords

The design of the new LCS² enclosures facilitates managing the cables and patch cords.

Easy association of a unit dedicated for cords, cable entry at the top made easy, new feedthrough panels for perfect organisation of patching...



1

Enclosures

The structure allows easy cable entry at the top and bottom of the enclosure. In the case of reduced room access space the structure can be completely dismantled.



2

Optimised cable management

The enclosures are offering lots of space besides the 19" uprights to guide and fix large quantities of cables.



3

Linking interface


Protects the cables and guarantees the bending radius between enclosure and cable trunking.



5

Respecting of the bending radius


Cable management panels with rings to guide and protect the patch cords.



4

Easy cable entry

Enclosure and cable management unit are equipped with pre-cuts (19") that accept cable feedthrough panels.

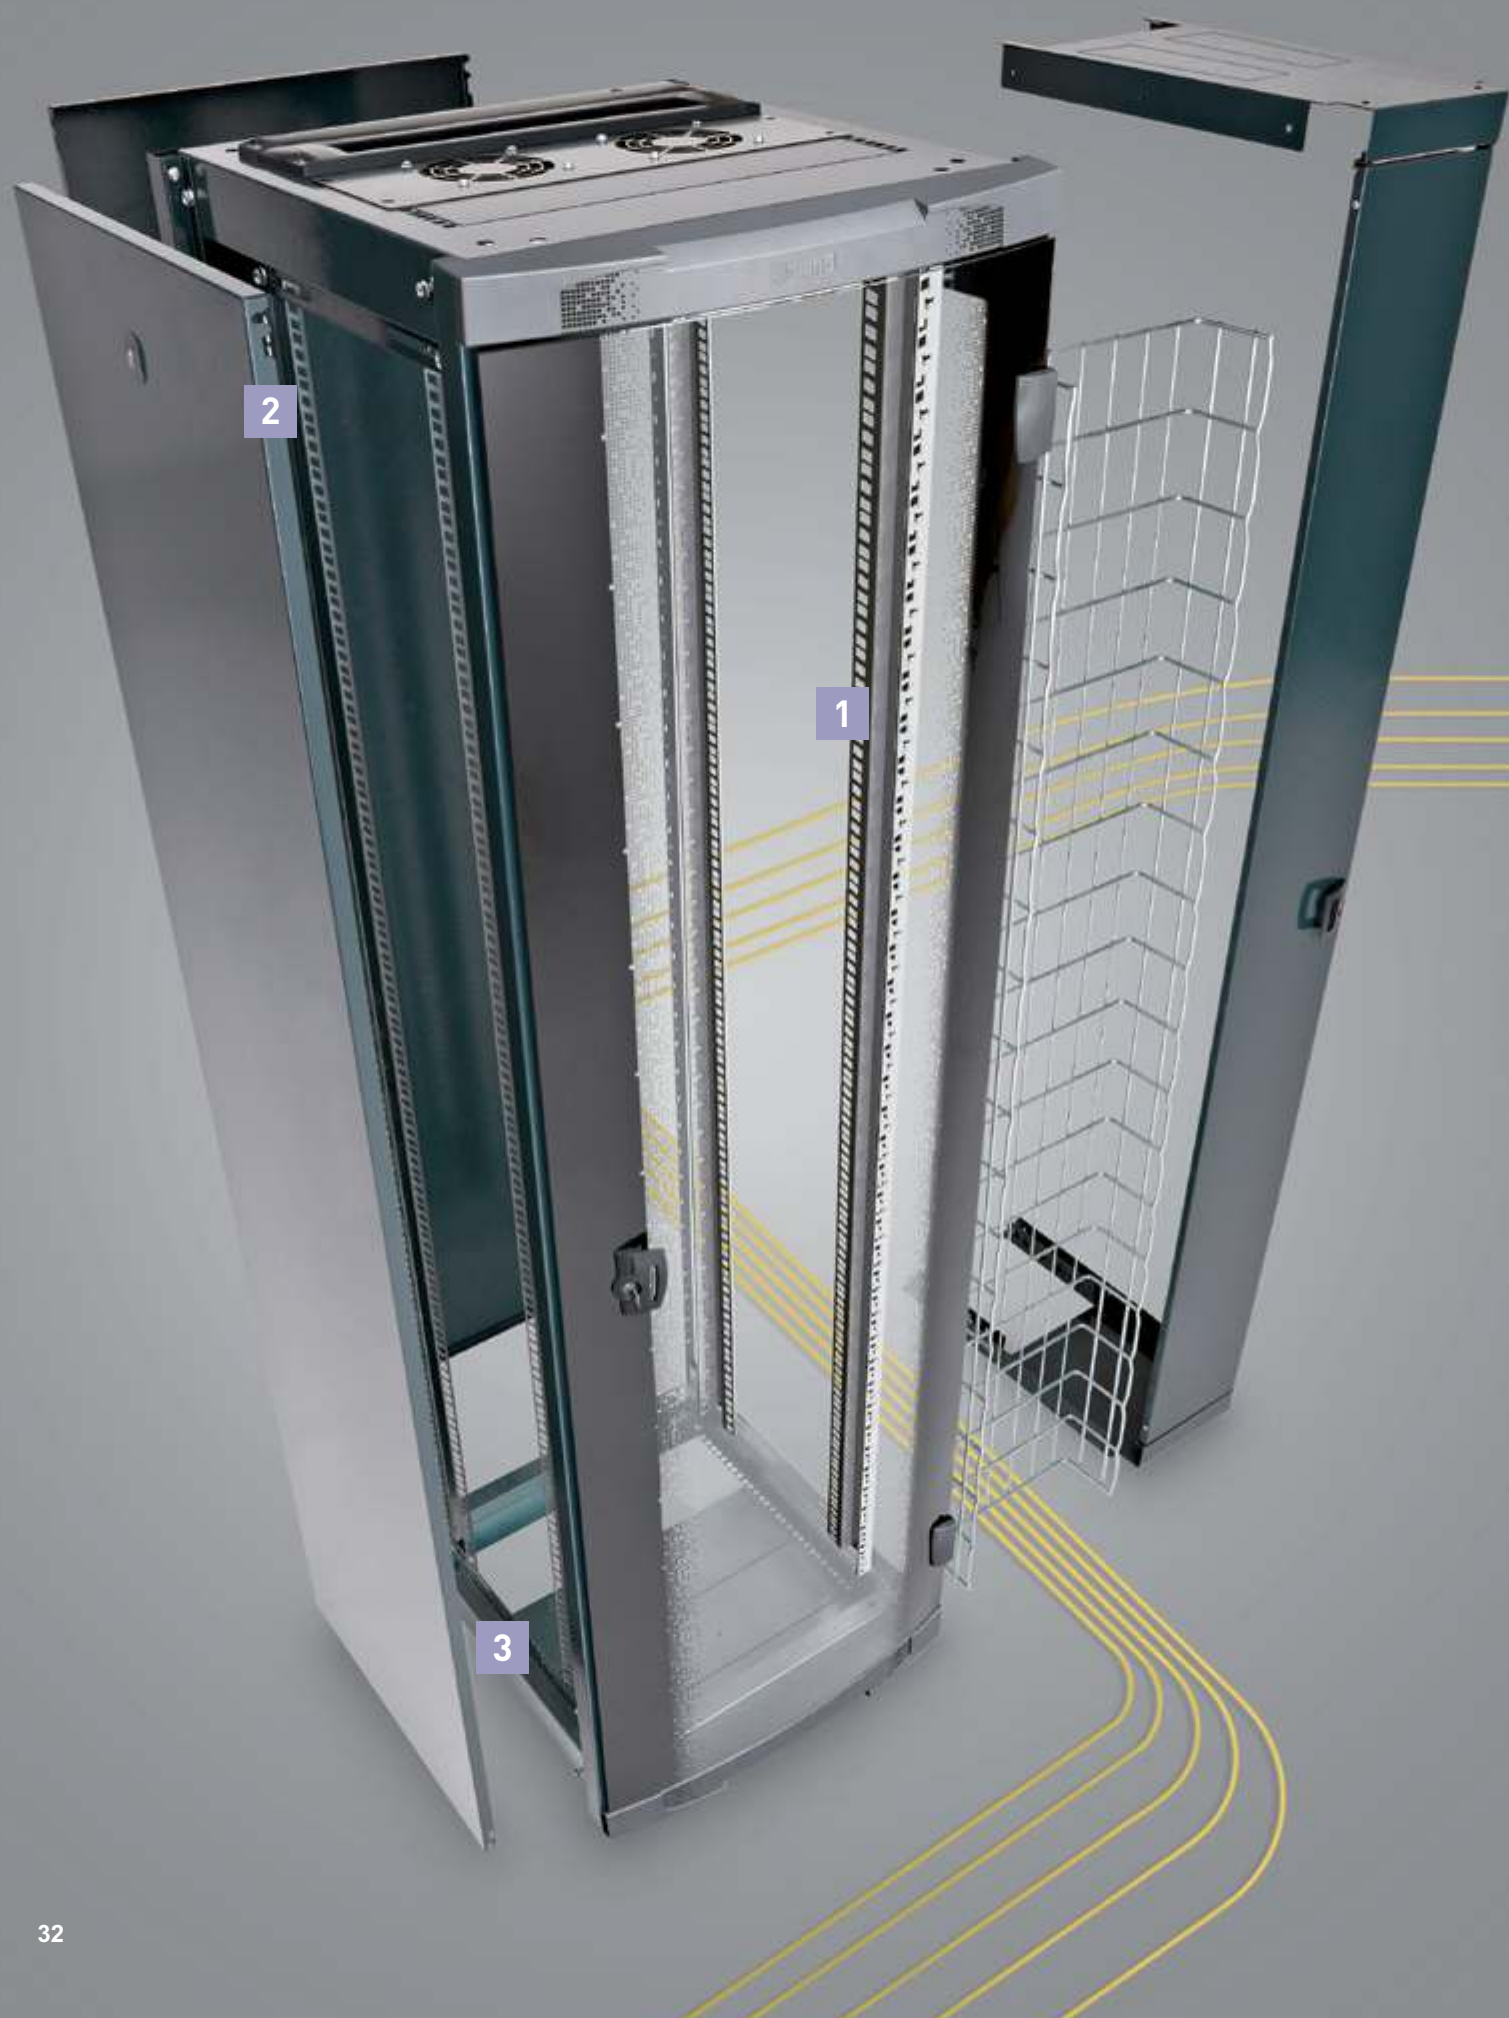

19" LCS² enclosures simplified assembly

The new LCS² enclosures can be very easily assembled and dismantled.

A considerable time-saving on the sites, complete accessibility thanks to the removable side and rear panels and a structure that can be entirely dismantled.




1

Easy installation
Dual marking of 19" uprights.



2


Total accessibility
A structure that can be completely dismantled.




3

Automatic grounding clip
Guarantee of grounding for the side and rear panels with the automatic grounding clip.

Combinations that answer various needs



Two 600-mm-wide enclosures with a cabling unit.



Two 800-mm-wide enclosures side by side.



LCS² 19" Server enclosures Complete accessibility

The new LCS² server enclosures are designed for complete accessibility.

Complete accessibility not only via the doors and panels, but also thanks to the rooftop pre-cuts and opening of the enclosure below.



Doors and panels with keyless lock system

- front door with handle
- perforated front and rear doors - 80% microperforation.



Cable entry

- 19" High pre-cuts
- open bottom.



Cable ducting

- Support with screwless tray fixing - Cablofil.




19" LCS² cabinets

Easy access, high-quality finish

The new LCS² wall-mounting cabinets can be fitted anywhere where maintaining aesthetic quality is very important.


The removable side panels and flexible cable entries (in the fixed cabinets) facilitate access for quick installation and easy maintenance.

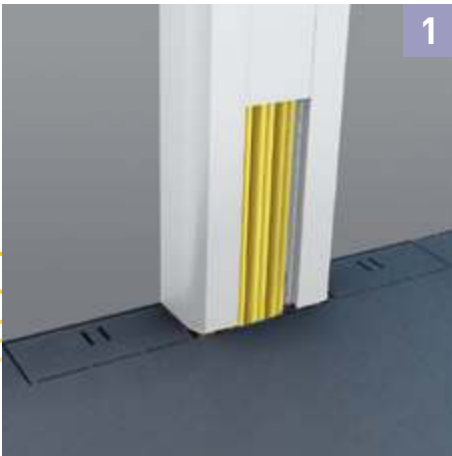

Flexible cable entries
In DLP trunking system format.

Total accessibility

Also available with pivoting body to enable easy access at the back. Removable side panels on all LCS² cabinets.


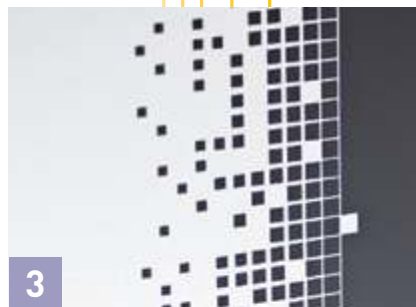



High-quality finish
Curved door, screen-printed glass.

Also available
in 10" version



Compact:
LCS² cabinet for small businesses.



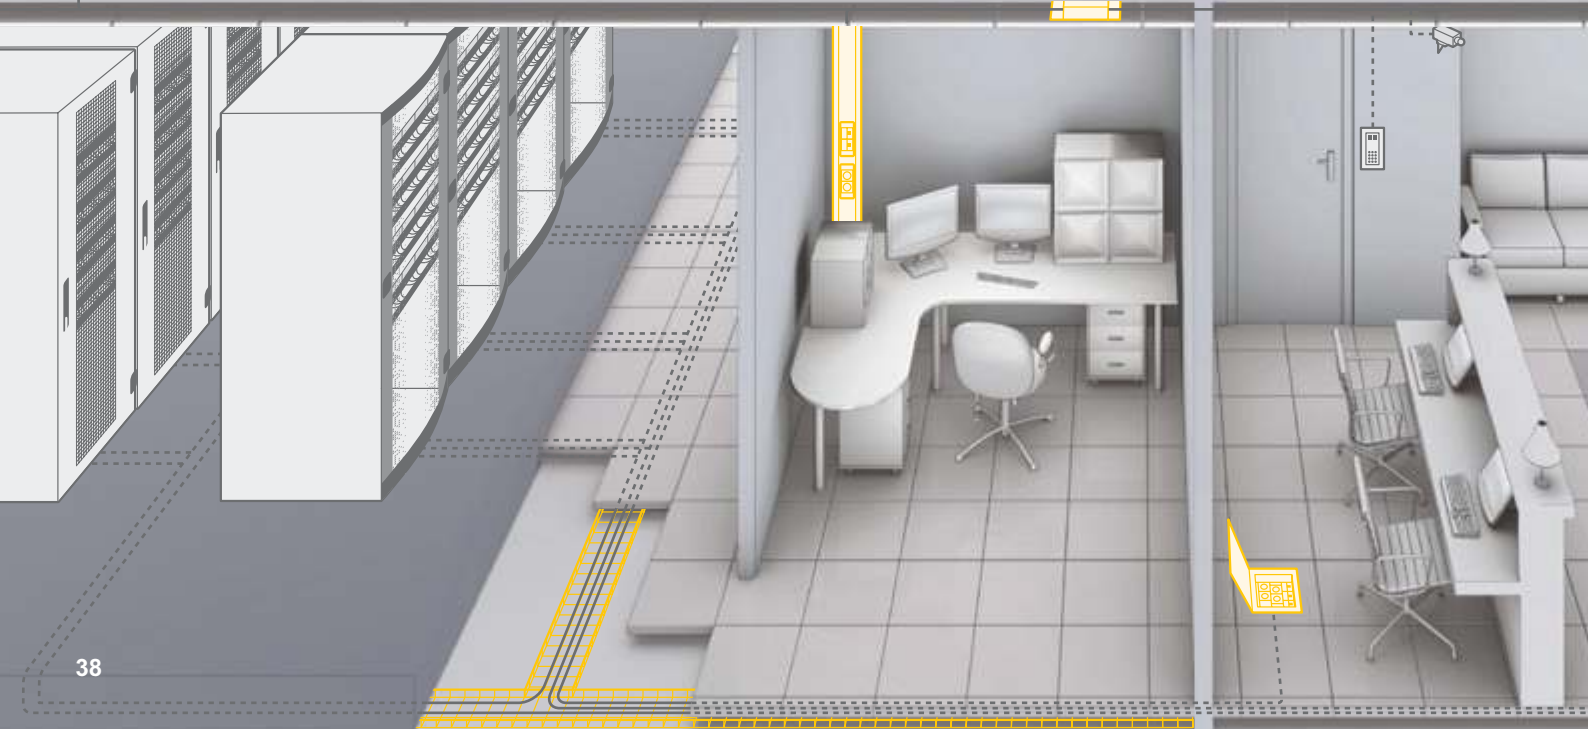



LCS² WORKSTATION

The network at your hand



Zone distribution boxes

See pages 40 to 41



Installation supports

See pages 42 to 43




RJ 45 Sockets

See pages 44 to 45



Wi-Fi

See pages 46 to 47

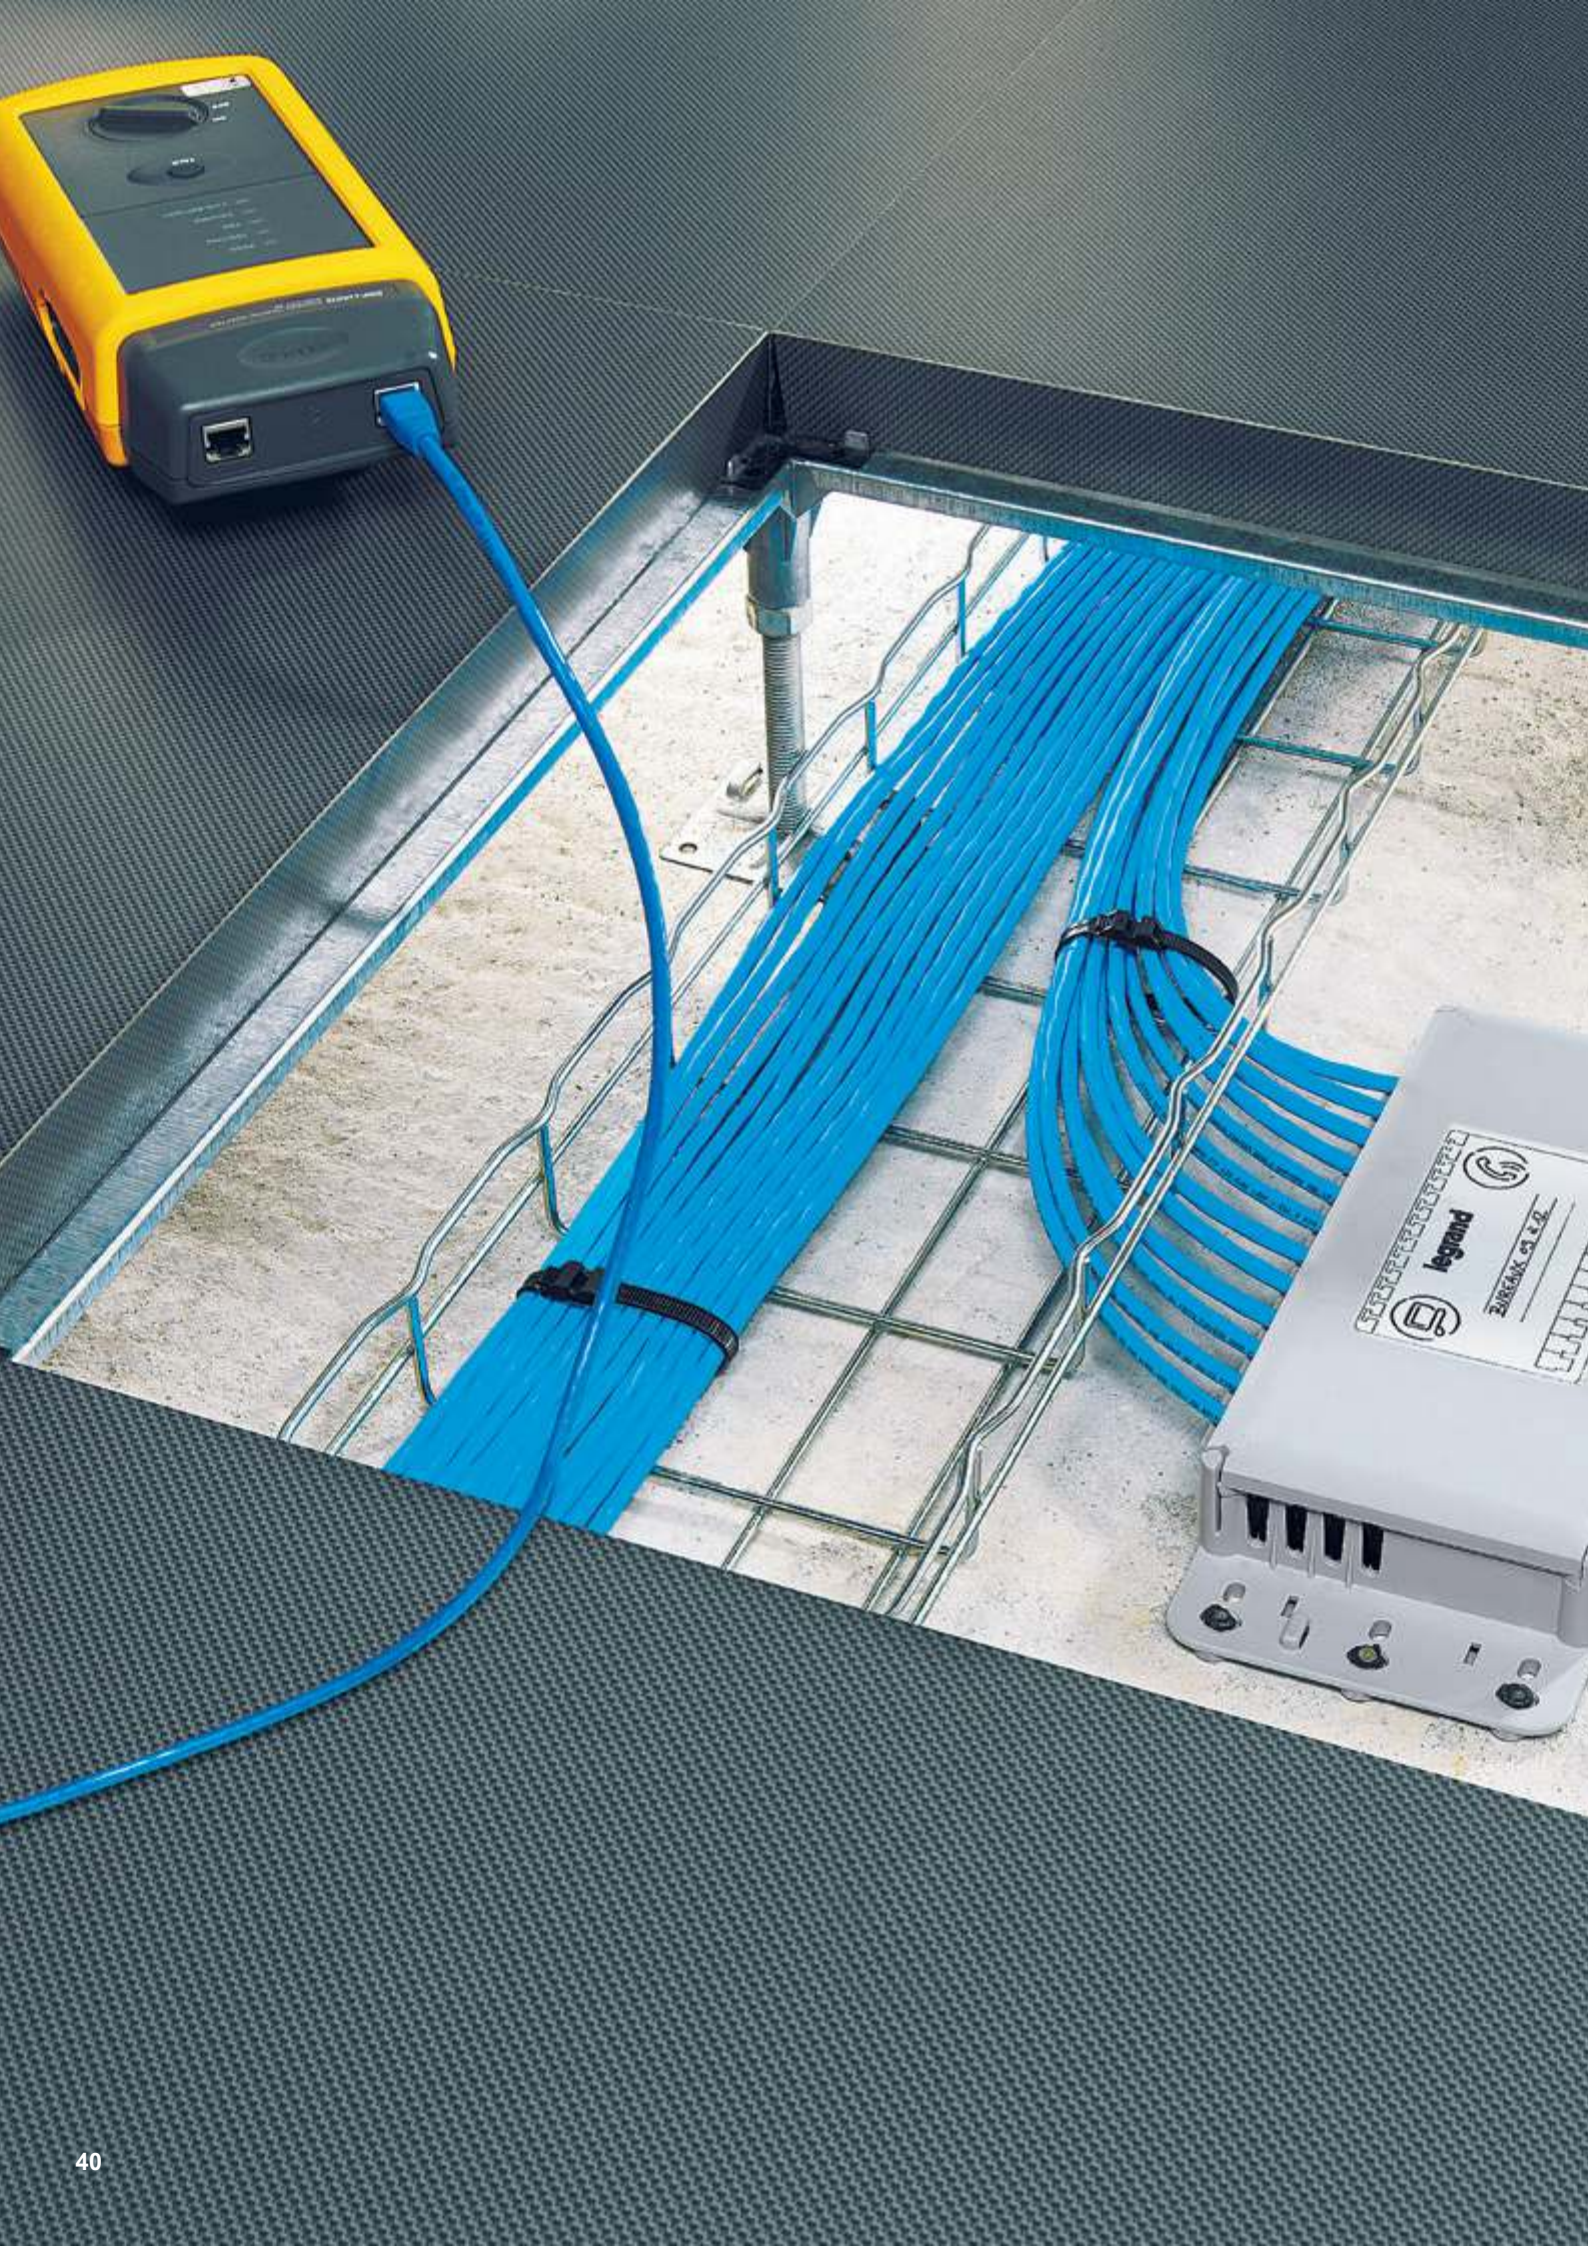

Zone distribution boxes of LCS² consolidate and redistribute with complete ease

With the new LCS² zone distribution boxes connected to the Mosaic or Arteor feedthrough sockets, the result is complete flexibility.

The connections close to the workstation are centralised, copper and fibre optic are in a single box, etc. and the LCS² performances are guaranteed.



2 blocks of 6 connectors can be fitted to connect up to 12 RJ 45 sockets
Distribution close to the installation supports (see next page).





Fibre optic/RJ 45 union
Copper and fibre are placed side by side in the same box.





Coil rack
For fibre optic.

LCS² Mosaic or Arteor feedthrough sockets:
Quick and reliable connection, installation on all supports



RJ 45 socket with copper feedthrough for RJ 45 - RJ 45 cord.



2 x ST fibre optic feedthrough socket for optical patch cord.



Installation support cable management systems

Network within reach.

On the wall with trunking, on the ceiling with columns, on the ground with floor boxes and desktop multi-outlet extensions or nearby with blocks and mini-columns. They are suitable for all work space configurations.



Mini-columns



Columns



Cablofil



Snap-on trunking



Floor boxes



Desktop multi-outlet
extensions




Meeting room modules



Office modules

End-to-end solutions:

Legrand cable management systems allow distribution of VDI cables and power cables from the point of entry to the workstation.

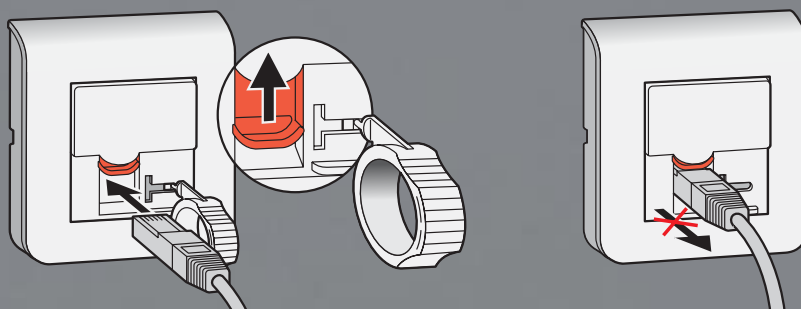

Mosaic RJ 45 socket
with controlled access

Organisation and safety with the new Mosaic sockets

In the technical room, in a false ceiling or in the floor boxes and desktop multi-outlet extensions, it is necessary to identify the special networks at a single glance.

Video surveillance, access control, adjusting the air conditioning, sensitive devices, etc. The Mosaic LCS² sockets have a coloured cover, consistent with high-current sockets.


Identify the protected supply networks
to ensure the protection of sensitive applications (for example: medical equipment).



Identify and restrict access to the uninterrupted power supply networks
to ensure continuous power supply to computer equipment.



Structure the special supply networks to isolate the specific equipment in the building.



Structure and protect the networks by insulating the sensitive applications.



Identify the sensitive information networks and control their access using a cover that can be unlocked using a key.



Structure the remote-supply networks (PoE injector) to use telephone, video applications on IP, etc.

RJ 45 Sockets with high standards of Legrand accessories



Mosaic
White or aluminium



Céline
Pleasing to the eyes



Arteor
Flow of energies



Wi-Fi that can be installed just like RJ 45 sockets

Wi-Fi access points can be fitted anywhere where unrestricted access to the computer network is required.

They can be fitted just like the RJ 45 sockets and on any supports. The stability of performance and the durability of products are guaranteed (see page 51).

Wi-Fi access points: essential mobility...


- In an environment where multiple Wi-Fi networks operate together, to optimise the available speed everywhere in the building (in compliance with 802.11 a + b/g and 802.11 n standards).
- In reception areas and passages, to provide network access anywhere in the building (in compliance with the 802.11 b/g and 802.11 n standards).
- In shared work areas, to connect a computer permanently and provide a wireless connection to temporary users (in compliance with the 802.11 a + b/g and 802.11 n standards).


The Wi-Fi access points can be mounted on any support:

Columns, mini-columns, snap-on trunking, floor boxes, etc., mural or on Cablofil.



LCS² PoE injector:
Power supply to
Wi-Fi access
points from the
patch panels

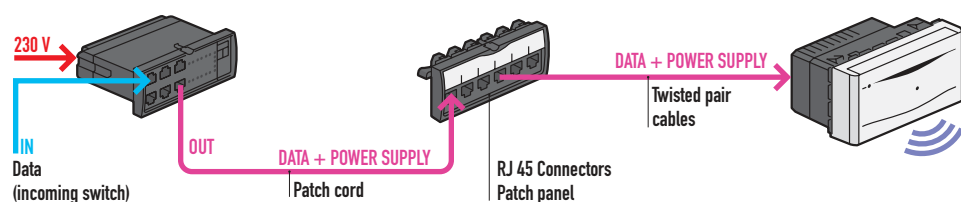


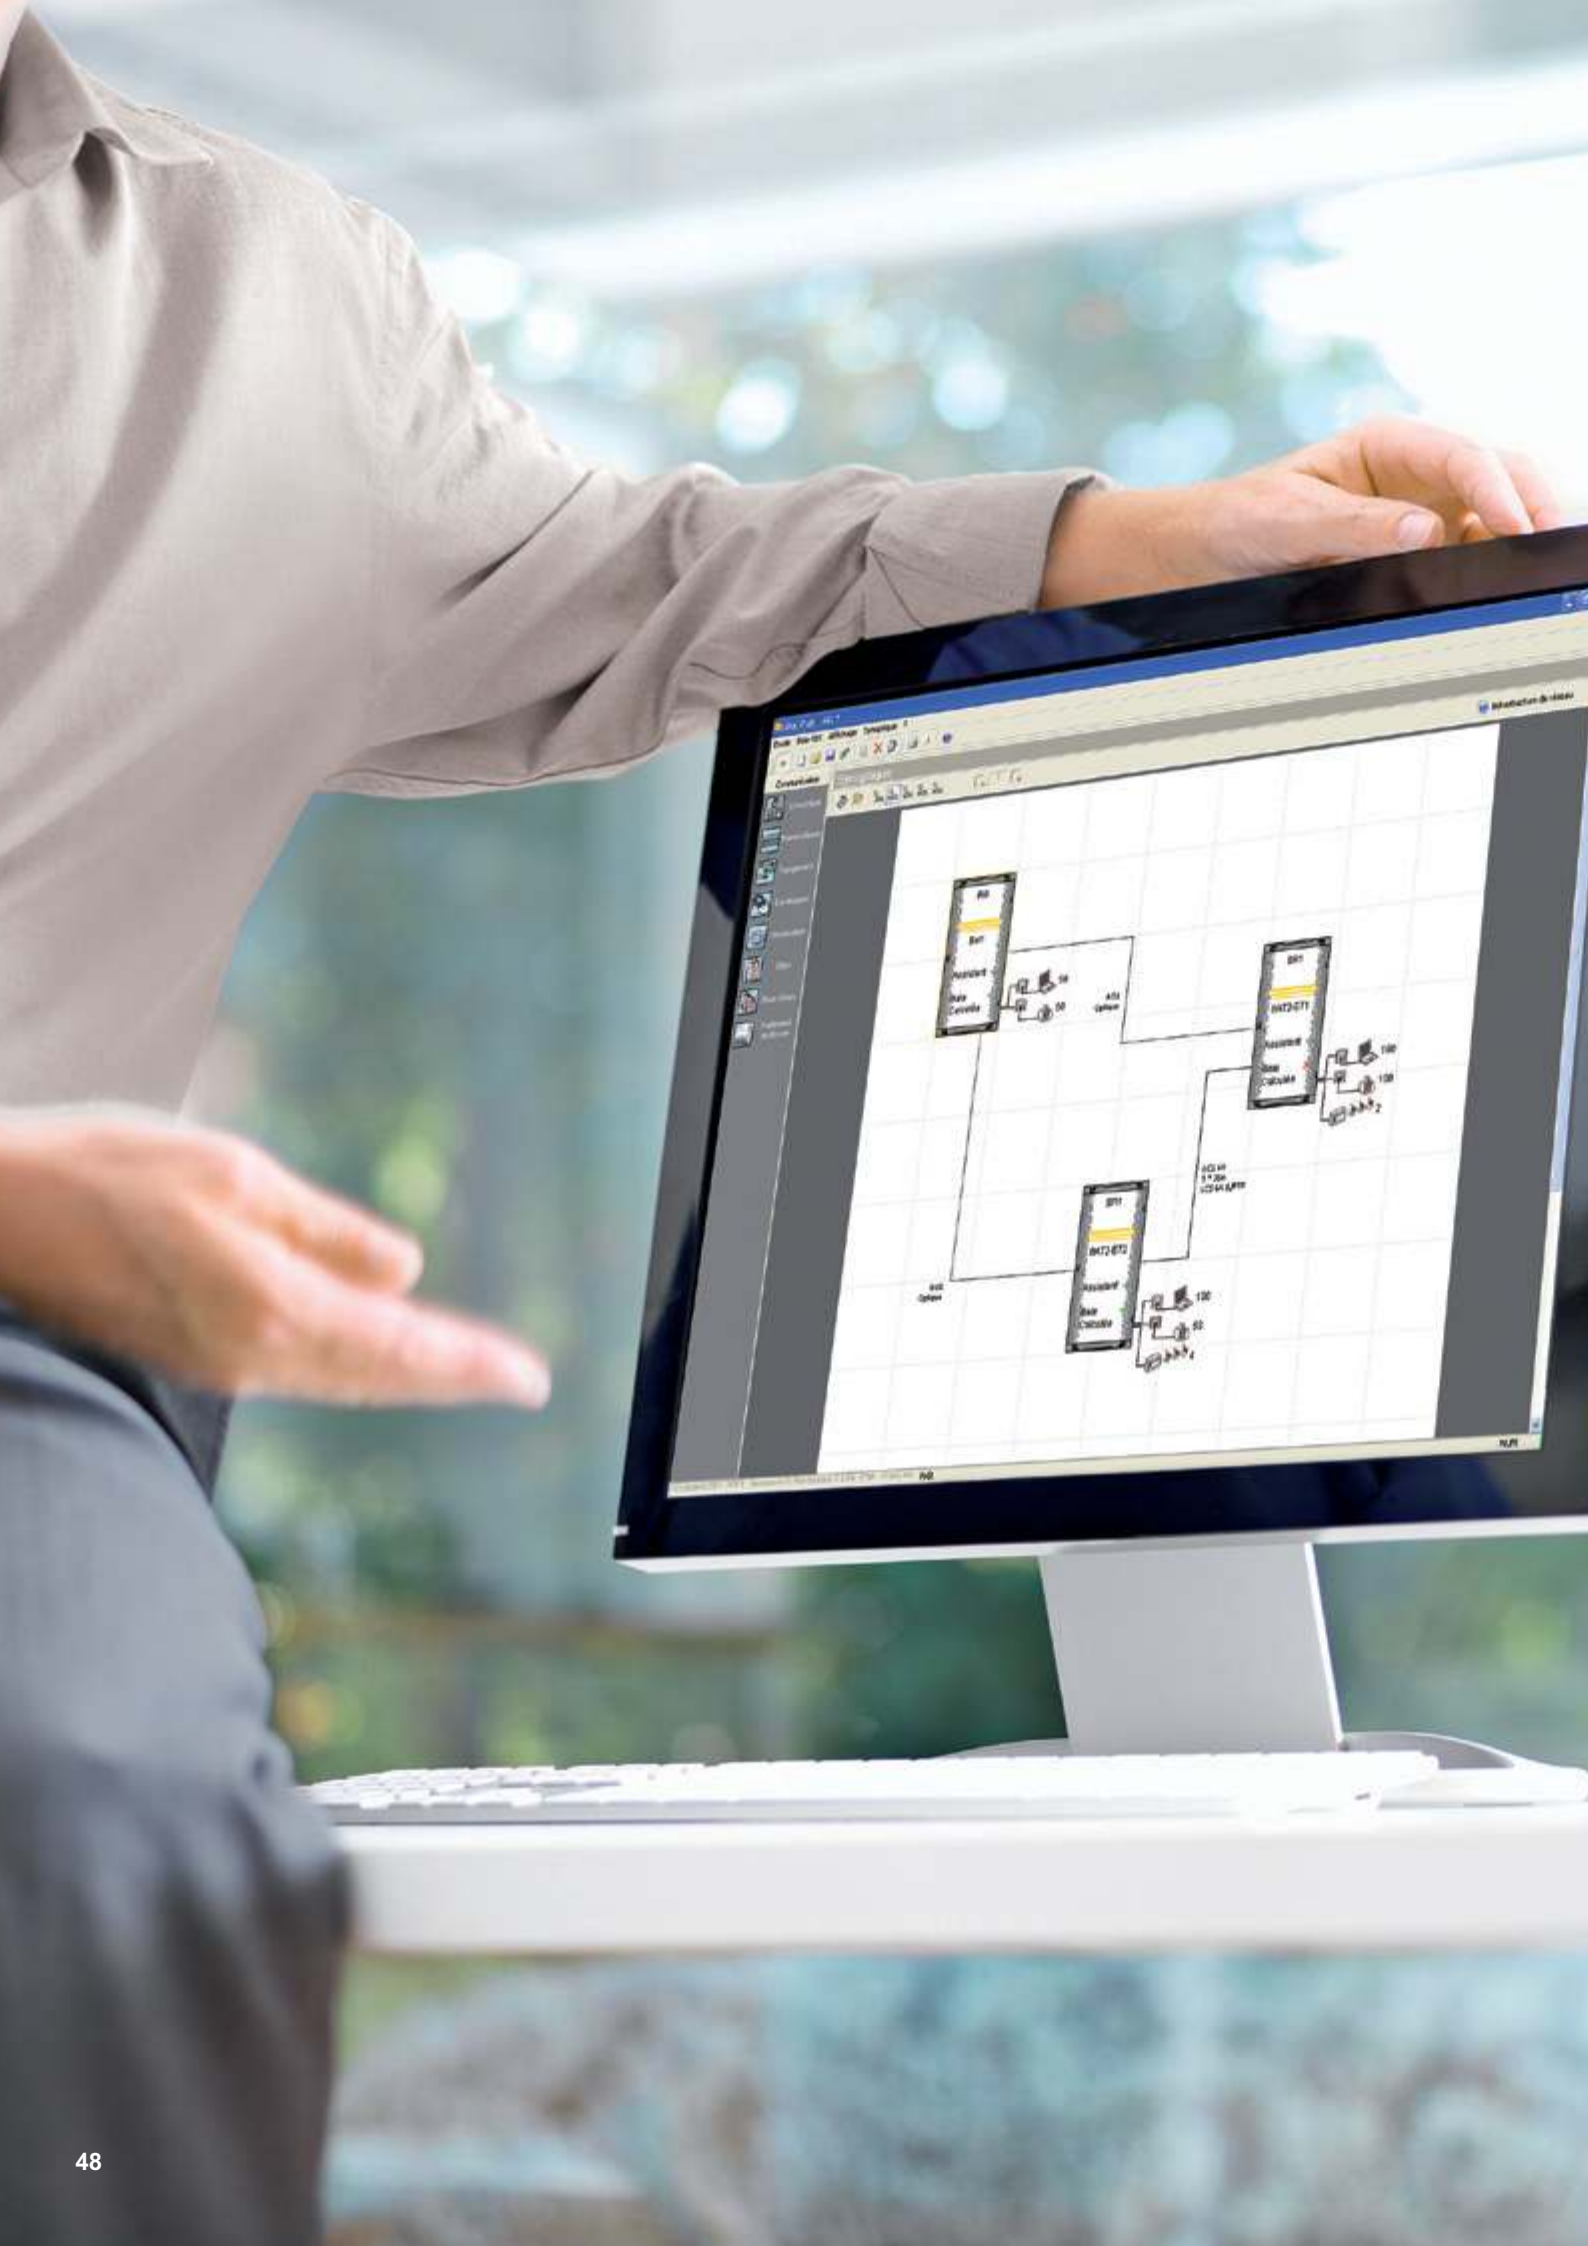

New LCS Pro² software

Your LCS² enclosure in a few clicks

With the new LCS Pro² software, you can now very easily and quickly select your products, view your enclosure, etc. and complete your study with the Chantier Chrono software which integrates all installation supports.

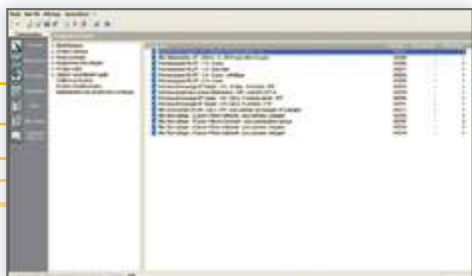

Automatic determination
of catalogue numbers by selecting the features and options.



Visual display of the installation
of the enclosure, modifications possible.



Easy management of studies
Technical records, purchase orders, document printing.

For more information

Check the LCS Pro² and Chantier Chrono software downloadable from www.legrand.country



**www.legrand.??
= change country**

In addition to LCS Pro²



The Chantier Chrono software shows a wide range of installation supports.

Structured cabling classes: A top-level training at Innoval

Being in close contact with engineers at the cutting edge of technological advances, Legrand trainers offer you practical classes in workshops.

These are experienced people who understand your business and speak your language. We offer you very useful and practical classes.



**Check
training site
with your
country**

Comprehensive classes

- Copper installation: essential for commercial sites
- Optical fibre: use and testing of an installation
- Copper: use and testing of an installation.

Classes to understand different methods

of using an optical backbone and of connecting and testing the optical links, as per the standards in force.



Classes to convert the telephone and computer network needs of your clients into complete and upgradeable solutions, and cabling them as per the standards in force.

Assurance of performance



■ Two guarantees to ensure the durability of your installations


The 20-year performance guarantee:

Legrand offers the installer the guarantee of continuity of performance levels of an LCS² cat. 6A, LCS² cat. 6 or LCS² cat. 5e system on link or channel over time.

The 20-year components guarantee: Legrand offers the installer the possibility of extending the usual guarantee from 2 years to 20 years on all products used in link or channel.


- The components guarantee of the LCS² cat. 6A, LCS² cat. 6 or LCS² cat. 5e systems: Legrand offers an extended guarantee on the components of the LCS² cat. 6A, LCS² cat. 6 or LCS² cat. 5e systems. 20 years for the components of channel or link, i.e. patch panels, RJ 45 sockets, cables and cords.

The contractual 2-year guarantee on these products is thus extended to 20 years.

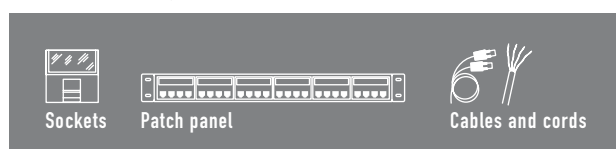

- The channel performance guarantee:

A channel is defined by the standards as being an assembly consisting of the following components: patch cord, patch panel, cable, RJ 45 socket, user cord. During acceptance testing, the performance of the channel is measured over a maximum length of 100 m. It must remain constant over time.

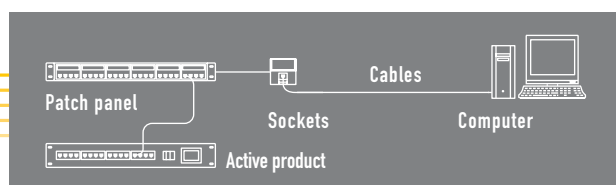

The performance of an installation must stand the test of time.

This is why Legrand guarantees the performance and the components of its LCS² cat. 6A, cat. 6 and cat. 5e systems over the entire channel or link for 20 years.

■ Conditions of the 20-year Performance Guarantee

As with any guarantee contract, certain conditions must be met in order to qualify for the Legrand 20-year Performance Guarantee. These conditions are naturally within the capabilities of any company specialised in the installation of structured cabling systems.

The main conditions are given below (extracts from the 20-year Performance Guarantee issued by Legrand). The installer has stored the components in storage conditions suitable for their type.

The installation has been built in strict compliance with good practice and abiding by all the conditions listed below.

All the components used in the cabling system must be Legrand LCS² cat. 6A, LCS² cat. 6 or LCS² cat. 5e Cabling Systems components.

All the patch cords used must be original Legrand products.

The max. length of a cord must be 5 m.

The installation must be built in accordance with the recommendations defined in installation standards EN 50174, EN 55022 and UTE C 15-900 in force at the time of issue of the guarantee.

Prior to the signature of the guarantee contract, Legrand will check that the installation acceptance test data comply with the values specified in the standard.

The installer must submit the following 4 documents to Legrand:

- The installation acceptance test for the link or the channel
- The "14 key points of a high performance installation" form, ticked and signed as agreement on its part of having complied with the 14 points
- A full list of the products installed
- An installation diagram of the patch cabinets and the RJ 45 sockets.

Any subsequent modifications or extensions must comply with the conditions listed above.


LCS², structured cabling systems

LCS² systems




P. 54
LCS²,
presentation
of the system


LCS² copper



P. 60
LCS², cat. 6A
patch panels
and blocks




P. 74
LCS², cat. 6
RJ 45 sockets



P. 75
LCS², double
connector sockets
and adaptors

LCS² fibre optic




P. 78
LCS²,
optical cables

LCS², enclosures and cabinets



P. 86
LCS² server
enclosures



P. 91
LCS²,
cable
management

NEW PRODUCTS for 2010




**New LCS²
connector**
for a perfect connection
and optimum
performance
(p. 60)




**New LCS² fibre
optic drawer**
For complete
accessibility and
comfortable
cabling
(p. 80)




P. 56
LCS²,
equipment and
enclosures
Selection chart




P. 61
LCS², cat. 6A
cables, cords and
zone distribution
boxes




P. 63
LCS² cat. 6A
RJ 45 sockets




P. 64
LCS², cat. 6
patch panels
and blocks




P. 65
LCS², cat. 6 cables,
cords, zone
distribution boxes and
cooper feedthroughs




P. 70
LCS², cat. 5e
patch panels
and blocks



P. 71
LCS², cat. 5e
cables, cords, zone
distribution boxes and
cooper feedthroughs




P. 73
LCS², cat. 5e
RJ 45 sockets




P. 74
LCS²: panels, blocks,
switches, PoE, etc.



P. 75
LCS², system
installation
accessories




P. 76
Telephone,
panels units and
cables




P. 76
Switch and Wi-Fi
access points
Mosaic Programme




P. 79
LCS², rapid
crimping kit
and connectors




P. 80
LCS², 19" fibre
optic drawer and
blocks, fibre
optic invertors




P. 81
LCS², Optical
fibre feedthrough
sockets and
spreaders




P. 82
LCS², optical
patch
cords




P. 87
LCS² Linkeo 19"
enclosures




P. 88
Enclosure plinths
and cable entries




P. 89
Altis™
enclosures




P. 90
LCS²,
19" equipment



P. 92
LCS²,
19" cabinets



P. 93
LCS²,
10" cabinets




P. 93
LCS² Linkeo,
fixed 19"
cabinets



New LCS² 19"


enclosures
For an optimised
management
of cables and cords
(p. 88)



New Mosaic sockets

For organisation
and safety
(p. 68)

LCS² ENCLOSURES

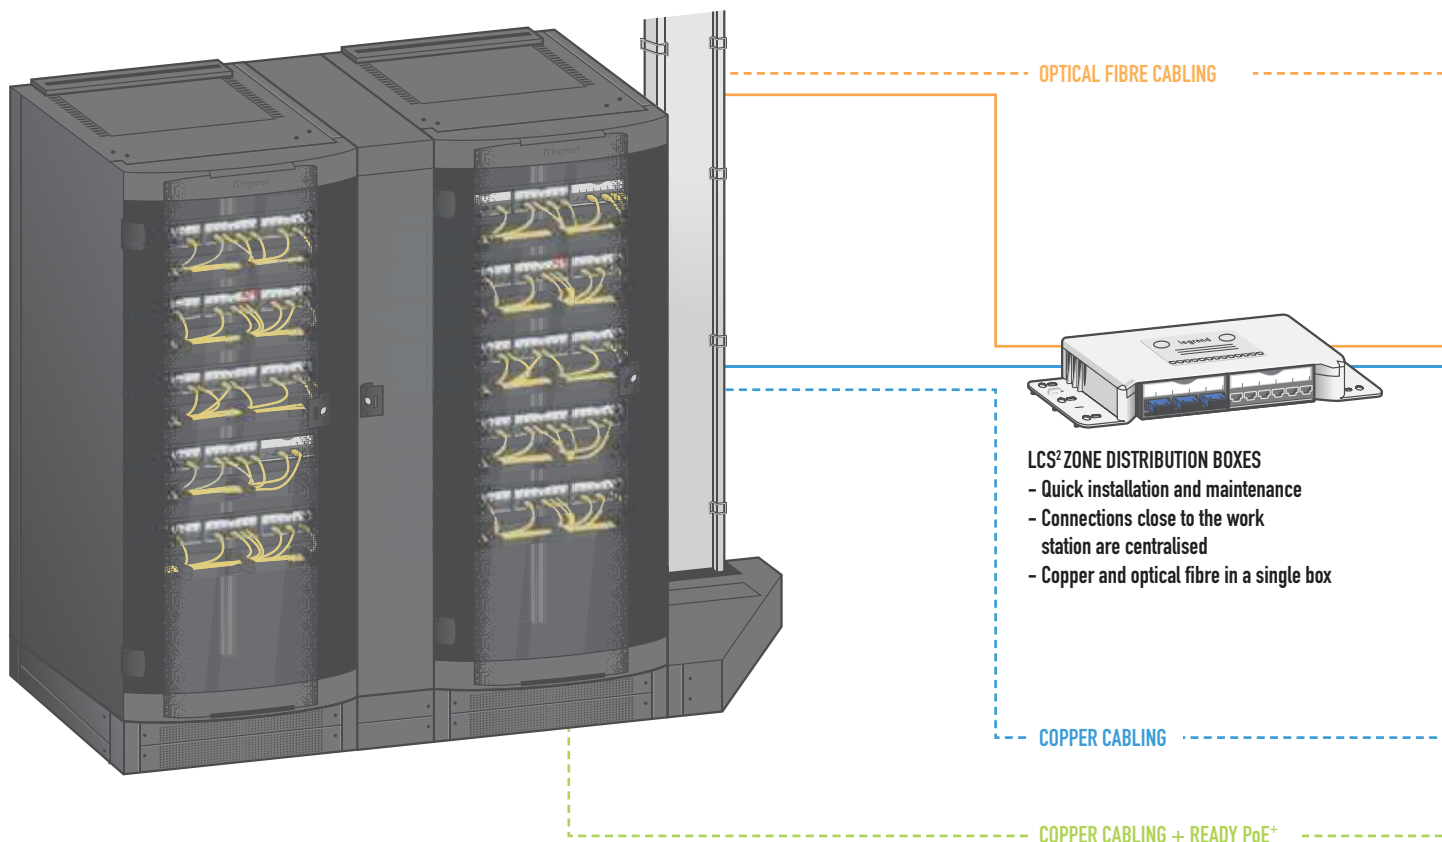

19" LCS² ENCLOSURES

- From 24 to 47 U, 600 to 1,000 mm deep
- Complete accessibility:
Removable side and rear panels and a structure that can be entirely dismantled


NEW

- Cabling unit with cable guide rack for optimised cable management



NEW

- Protects and maintains the bending radius of cables thanks to the linking interface

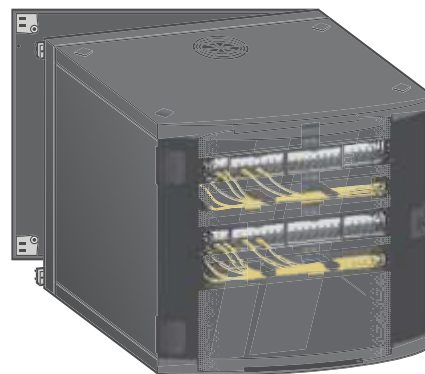


19" LCS² CABINETS

- From 6 to 21 U, 400 to 600 mm deep
- Quick installation and easy maintenance thanks to the removable side panels
- Available in 10" option
- Available with pivoting body to enable easy access to the rear

ADVANTAGES OF THE OFFER

- The new LCS² RJ 45 connectors are the core elements in the performance of the LCS² system


- Technical performance:
Measurements of LCS² components and links validated by 3 P Third Party Testing, an independent laboratory

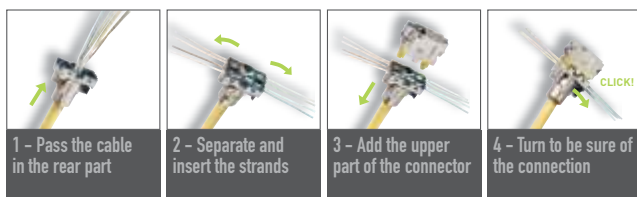

NEW


LCS² from technical room to workstation

LCS² CONNECTORS




OPTICAL FIBRE SOCKETS

- To connect 2 fibres
- Available in ST, SC and LC



WALL-MOUNTED COPPER SOCKETS

- Cat. 6A / cat. 6 / cat. 5e
- With coloured cover to structure and protect the networks



WALL-MOUNTED SAFETY SOCKETS

To identify the sensitive information networks and control their access using a cover that can be unlocked using a key



WI-FI ACCESS POINT

- Supply from the patch panel by the PoE injector LCS²
- Cabling identical to that of RJ 45 sockets
- Can be fitted on any installation supports of Mosaic Programme



TOOLS FOR MORE INFORMATION



/// **The LCS PRO² software:** to design your LCS² enclosure in a few clicks, and configure your networks



/// **The LCS² document and the technical recommendation guide:** to see the entire LCS² range



/// **Courses at Innoval:** essential to carry out copper and optical fibre installations

GARANTIE
20 ans
PERFORMANCE

legrand

Committed to delivering a durable LCS² system, Legrand gives a 20-year guarantee on its performance

selection chart for equipment and enclosures

configure your LCS² system

SELECT RJ 45 SOCKETS AND WI-FI MOSAIC ACCESS POINTS

				LCS ² cat. 6A	LCS ² cat. 6	LCS ² cat. 5e
	1 module	STP	White	765 73	765 63	-
		UTP	White	-	765 61	765 51
	2 modules	STP	White	765 76	765 66	-
		UTP	White	-	765 64	765 54
	2 modules with 45° incline	STP	White	765 08	765 03	765 01
		UTP	White	765 09		
	With controlled access	STP	White	765 99	765 96	-
		UTP	White	-	765	765 97
	Sockets at 90°	STP	White	-	765 93	-
		UTP	White	-	765 91	-
	Antimicrobial	STP	White	-	765 83	-
		UTP	White	-	765 81	-
	2 x RJ 45 sockets	UTP	White	-	765 44	765 41
	Green shutter	STP	White	765 24	-	-
		FTP	White	-	765 22	-
	Orange shutter	STP	White	765 25	-	-
		FTP	White	-	765 23	-
	Copper feedthroughs	UTP	White	-	786 22	786 20
	Doubler sockets	Ethernet/Ethernet	UTP	765 38	765 38	765 38
		Telephone/Ethernet	UTP	765 36	765 36	765 36
		Telephone/telephone		765 35	765 35	765 35
	Manageable Wi-Fi access points	With RJ 45 socket, dual-band and dual-radio		779 14	779 14	779 14
		Dual-band and dual-radio		779 13	779 13	779 13

SELECT LCS² PANELS AND CONNECTOR UNITS

	Patch panels 1U Fitted with 24 connectors	STP	335 73	335 63	-
		UTP	-	335 61	335 51
	Units of 6 x RJ 45 connectors	STP	335 76	335 66	-
		UTP	-	335 64	335 54
	Blanking plate		335 91	335 91	335 91
	Patch panel 1 U To be fitted with 4 units		335 90	335 90	335 90

SELECT ADDITIONAL LCS² PANELS AND UNITS

			LCS ²
	Telephone panels 1 U Fitted with 4 x 12 port extensions	3-6/4-5 contacts (digital)	335 31
		4-5/7-8 contacts (analogue)	335 30
	Telephone extensions Fitted with 12 ports	3-6/4-5 contacts (digital)	335 33
		4-5/7-8 contacts (analogue)	335 32
	Doubler units	Ethernet/Ethernet UTP	335 38
		Telephone/Ethernet UTP	335 36
		Telephone/telephone	335 35
	Video streaming unit	6 x "F" connectors	335 34
	Switch units	7 x RJ 45 ports	335 02
		6 x RJ 45 ports + 1 LC type optic port	335 05
	Power over Ethernet (PoE) injector	4 ports	335 01

selection chart for equipment and enclosures

configure your LCS² system (continued)


SELECT FIBRE OPTIC EQUIPMENT

			Monomode	Multimode
	LC units	For 6 fibres	335 13	335 18
		High density - For 12 fibres	-	335 19
	SC units	For 6 fibres	335 12	335 17
	ST units	For 6 fibres	-	335 16
	Copper/fibre optic converters	10/100 base T to 10/100 base SX	-	335 06
		1000 base T to 1000 base SX/LX	-	335 07
	Switch units	6 x RJ 45 ports + 1 LC type optic port	335 05	335 05
	Fibre optic enclosures 1 U - For 4 fibre optic units		335 10	335 10
	Fibre optic cassettes for patch panel		335 11	335 11

SELECT 19" LCS² FEEDTHROUGH PANELS

	Metal, 2 axes, quick-fixing	1 U	465 22
		2 U	465 23
	Plastic with brushes, direct clipping	1 U	465 28
		2 U	465 29
	Metal with brushes, quick-fixing	1 U	465 30
		2 U	465 31

SELECT 19" LCS²

	Socket units 2P+E 2 U	9 sockets	465 50
		6 sockets	465 54
		6 sockets	332 88
		Switch with indicator	
		6 sockets	332 37
		Double-pole circuit-breaker	
		6 sockets	332 87
		For safeguarded circuit	
		9 sockets Schuko	465 60
	6 sockets Schuko	465 62	
	Unit with surge suppressor 2 U	6 sockets	332 78
		Switch with indicator	
	Modular unit 2 U	Replacement module	775 41
		Takes 16 Mosaic modules	332 79
DIN rail kit IP 2X - 2 U	For Lexic modular devices	465 45	

SELECT PATCH CORDS AND RJ 45 USER CORDS






	S/FTP	Impedance 100 Ohms	1 m	517 80	517 52	-
			2 m	517 81	517 53	-
			3 m	517 82	517 54	-
			5 m	517 83	517 55	-
			1 m	-	517 62	516 40
	F/UTP	Impedance 100 Ohms	2 m	-	517 63	516 41
			3 m	-	517 64	516 42
			5 m	-	517 65	516 43
			1 m	-	517 72	-
			2 m	-	517 73	-
	U/UTP	Impedance 100 Ohms	3 m	-	517 74	-
			5 m	-	517 75	-

SELECT COPPER CABLES (305 OR 500 m REELS)

	S/FTP	4 pairs	500 m	327 77	-	-
		4 pairs	500 m	-	327 57	-
	SF/UTP	2 x 4 pairs	500 m	-	328 59	-
		4 pairs	305 m	-	328 56	327 52
	F/UTP	4 pairs	500 m	327 78	327 56	328 50
		2 x 4 pairs	500 m	-	327 76	327 74
		4 pairs	305 m	-	327 54	327 50
	U/UTP	4 pairs	500 m	-	328 61	328 53
		2 x 4 pairs	500 m	-	328 63	328 55

selection chart for equipment and enclosures






configure your LCS² system (continued)

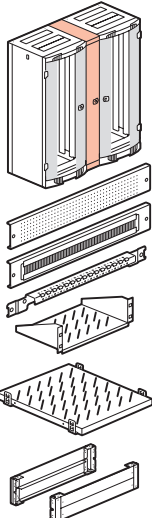SELECT 19" LCS² ENCLOSURES			Depth 600 mm	Depth 800 mm	Depth 1000 mm	
	24 U	Width 600 mm	463 00	-	-	
	29 U	Width 600 mm	463 06	-	-	
	33 U	Width 600 mm	463 12	-	-	
	42 U	Width 600 mm	463 18	463 19	-	
		Width 800 mm	463 21	463 22	463 23	
	47 U	Width 800 mm	-	463 28	463 29	
SELECT 19" LCS² EXTENSION ENCLOSURES			Depth 600 mm	Depth 800 mm		
42 U	Width 600 mm		463 30	-		
	Width 800 mm		-	463 33		
SELECT 19" LCS² SERVER ENCLOSURES			Depth 1000 mm			
42 U	Width 600 mm		463 85			
	Width 800 mm		463 86			
SELECT EQUIPMENT FOR 19" LCS² ENCLOSURES			For enclosure depth 600 mm	For enclosure depth 800 mm	For enclosure depth 1000 mm	
	42 U cabling units		463 34	463 35	-	
	Base for cabling unit, trap height 100 mm		464 64 ⁽¹⁾	464 64 ⁽¹⁾	-	
	Joining kits		463 37	463 38	463 39	
	Sets of 2 solid side traps for enclosure base		464 54 ⁽²⁾	464 56 ⁽²⁾	464 58 ⁽²⁾	
	Ventilated traps, 1 trap height 100 mm		464 60	464 61	-	
	Traps with brushes, 1 panel height 100 mm		464 62	464 63	-	
	Stay plates		476 93	476 94	476 95	
	Linking interface		464 66	-	-	
	Fixed shelves Projecting mounting on 2 x 19" uprights (excludes server enclosures)	Depth 115 mm	465 00	465 00	465 00	
		Depth 200 mm	465 01	465 01	465 01	
		Depth 360 mm	465 02	465 02	465 02	
	Fixed shelves. Quick mounting on 4 x 19" uprights (excludes server enclosures)		465 05	465 06	465 07	
	Fixed shelf. Screw fixed on 4 x 19" uprights		-	-	465 17	
	Telescopic shelves. Quick mounting on 4 x 19" uprights (excludes server enclosures)		465 08	465 09	465 10	
	Telescopic shelf. Screw fixed on 4 x 19" uprights (for server enclosures)		-	-	465 18	
	Set of 2 fixed runners		465 11	465 12	465 13	
		Enclosure base kits		Height 100 mm		Height 200 mm
			For width 600 mm	464 50	464 52	
			For width 800 mm	464 51	464 53	
SELECT 19" LCS² CABLE ENTRIES FOR TOP AND BOTTOM AND BLANKING PLATES			For enclosures			
	Plastic cable entries with brushes, direct clipping	1 U	465 28			
		2 U	465 29			
	Solid plastic blanking plates, direct clipping	1 U	465 32			
		2 U	465 33			
	Metal cable entries with brushes, quick-fixing	1 U	465 30			
		2 U	465 31			
	Solid metal blanking plates, quick-fixing	1 U	465 38			
		2 U	465 39			
		3 U	465 40			
SELECT CABLING MANAGEMENT EQUIPMENT						
	Sets of 3 cable management supports	For enclosure width/depth 600 mm	464 72			
		For enclosure width/depth 800 mm	464 73			
		For enclosure depth 1000 mm	464 74			
	Flat cable guides	For enclosure 33 U	464 76			
		For enclosure 42 U	464 77			
	U-shaped cable guides	Width 200 mm	464 69			
		Width 400 mm	464 70			
	Cord management grille	For enclosure 42 U, width 800 mm	331 35			
Vertical feedthrough	For enclosure 42 U, width 800 mm	464 80				
Patch extension	For enclosure 42 U, width 800 mm	464 81				
SELECT THERMAL MANAGEMENT EQUIPMENT AND ACCESSORIES						
	19" plates 3U with 230 V fans	2 fans	464 87			
		3 fans	464 88			
	Ventilation enclosures	For enclosure depth 600/800 mm	464 89			
		For enclosure depth 800/1000 mm	464 90			
	Thermostat	Adjustable range 5 to 60 °C	348 48			
		Set of 4 casters	464 83			
	Accessories	Set of 4 casters for server enclosure	464 82			
		230 V Lighting kit	464 85			
		Level adjustment kit	464 84			
		Floor fixing kit	464 86			

(1) Double the number of traps for a height of 200 mm
(2) Order 2 sets for a base height of 200 mm [Cat.Nos 464 52/53]


selection chart for equipment and enclosures

configure your LCS² system (continued)

SELECT 19" LCS ² CABINETS AND EQUIPMENT			FIXED		PIVOTING
			Depth 400 mm	Depth 580 mm	Depth 600 mm
	6 U	Height 350 mm	462 00	-	-
	9 U	Height 500 mm	462 01	462 06	462 11
	12 U	Height 600 mm	462 02	462 07	462 12
	16 U	Height 800 mm	462 03	462 08	462 13
	21 U	Height 1000 mm	-	462 09	462 14
	Fixed shelves	Depth 115 mm	465 00	465 00	465 00
		Depth 200 mm	465 01	465 01	465 01
		Depth 360 mm	-	465 02	465 02
	Equipment	Cable entry plate with brush	-	-	462 55
		230 V~ fan	462 60	462 60	462 60
		Thermostat	348 48	348 48	348 48
		Set of 4 casters	-	-	462 64
SELECT FIBRE OPTIC PATCH CORDS			OS 1 (UPC) monomode 9/125 µm	OM 3 multimode 50/125 µm	OM 2 multimode 50/125 µm
	ST/ST duplex cords	1 m	-	-	330 80
		2 m	-	-	330 81
		3 m	-	-	330 82
	SC/SC duplex cords	1 m	326 00	326 09	330 69
		2 m	326 01	326 10	330 70
		3 m	326 02	326 11	330 71
	SC/LC duplex cords	1 m	326 03	326 12	330 75
		2 m	326 04	326 13	330 63
		3 m	326 05	326 14	330 76
	ST/SC duplex cords	2 m	-	-	330 72
		3 m	-	-	330 73
	LC/LC duplex cords	1 m	326 06	326 15	
		2 m	326 07	326 16	330 61
		3 m	326 08	326 17	
	LC/ST duplex cord	2 m	-	-	330 65
SELECT OPTIC CABLES (2000 m REELS)					
	Internal/external, anti-rodent	6 fibres	325 12	325 10	325 08
		12 fibres	-	325 11	325 09
	External, anti-rodent reinforced steel	6 fibres	325 13	-	-
LCS ² zone distribution boxes			LCS ² cat. 6	LCS ² cat. 5e	
	Zone distribution boxes Fitted with 12 x RJ 45 connectors	STP	335 46	-	
		FTP	335 45	-	
		UTP	335 44	-	
	Units of 6 x RJ 45 connectors	STP	335 66	-	
		FTP	335 65	335 55	
		UTP	335 64	335 54	
	Fibre optic accessory		335 20	335 20	
	Zone distribution box To be fitted with 4 units		335 40	335 40	

Your LCS² enclosure in a few clicks

Select your products and visualise your enclosure simply and quickly with the new LCS Pro² software...
and complete your study with Chantier Chrono software which integrates trunking, columns, floor and feeder boxes

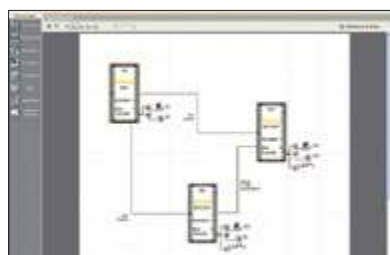

LCS Pro² allows you to **automatically find** Cat.Nos by selecting characteristic options



images en français



LCS Pro² lets you **visualise the enclosure installation** and amend it if required



LCS Pro² allows you to **easily manage your studies**: technical summaries, purchase orders, document printing

In addition to LCS Pro², Chantier Chrono extends the selection to trunking, columns, floor and feeder boxes



Legrand cabling system LCS² category 6A

NEW

patch panels, blocks of connectors



335 73



335 90



335 76



Connector cat. 6A shielded STP

Pack	Cat.Nos	
		Patch panel cat. 6A 24 x RJ 45 connectors
		Panel supplied with quick-fixing All enclosures or cabinets general assembly Panel ensures automatic grounding of each connector Fitted with rear cable guide to hold cables during maintenance Fitted with 4 units of 6 LCS ² RJ 45 connectors cat. 6A with fast connection thanks to integrated crimping, with wiring schemes T 568 A and T 568 B Supplied with numbered colour labels Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-2 and TIA/EIA 568C 19" panel - 1 U
1	335 84*	UTP panel - 8 contacts
1	335 85*	UTP high density panel - 8 contacts
1	335 73	STP - Metal shielding 360°
1	335 86*	STP high density panel - 360° metal shielding

*Available April 2011

		Modular panel
		Panel supplied with quick-fixing All enclosures or cabinets general assembly Panel ensures automatic grounding of each connector Fitted with rear cable guide to hold cables during maintenance Modular empty panel for up to 4 units Take the following equipment: - units of 6 x LCS ² RJ 45 connectors - telephone inlet units - fibre optic units - PoE injector units - video streaming units - switch units - telephone/Ethernet doubler units - copper/fibre optic converter units - blanking plates 19" panel - 1 U
1	335 90	

		Units of 6 x RJ 45 connectors cat. 6A
		Fitted with 6 x LCS ² RJ 45 connectors cat. 6A with fast connection thanks to integrated crimping, with wiring schemes T 568 A and T 568 B Supplied with colour labels Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-2 and TIA/EIA 568C STP unit - metal shielding 360° Blanking plate for 19" panel - Black
2 10	335 76 335 91	

Legrand cabling system LCS² category 6A cables



327 77

Pack	Cat.Nos	Cables for local networks cat. 6A
		Cables 4 pairs or 2 x 4 twisted pairs 100 ohms LSZH sleeve: halogen-free Yellow RAL 1018 Colour code TIA/EIA Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568C Performance 500 MHz
	LSZH 	U/UTP - 4 pairs Performance 500 MHz
500 ⁽¹⁾	327 87	Length 500 m Supplied on reel. Weight 25 kg
		F/UTP - 4 pairs Performance 500 MHz
500 ⁽¹⁾	327 78	Length 500 m Supplied on reel. Weight 25 kg
		F/UTP - 2x4 pairs Performance 500 MHz
500 ⁽¹⁾	328 78	Length 500 m Supplied on reel. Weight 65 kg
		S/FTP - 4 pairs Performance 600 MHz
500 ⁽¹⁾	327 77	Length 500 m Supplied on reel. Weight 30 kg

Legrand cabling system LCS² category 6A cords



517 82

Pack	Cat.Nos	RJ 45 patch cords and user cords cat. 6A
		RJ 45 - RJ 45 right Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568C
	PVC 	U/UTP unscreened impedance 100 Ω
5	518 82	Length 1 m
5	518 83	Length 2 m
5	518 84	Length 3 m
5	518 85	Length 5 m
	LSZH 	
5	518 78	Length 1 m
5	518 79	Length 2 m
5	518 80	Length 3 m
5	518 81	Length 5 m
5	518 74	Length 1 m
5	518 75	Length 2 m
5	518 76	Length 3 m
5	518 77	Length 5 m
	PVC 	S/FTP shielded impedance 100 Ω
5	517 80	Length 1 m
5	517 81	Length 2 m
5	517 82	Length 3 m
5	517 83	Length 5 m
	LSZH 	
5	518 70	Length 1 m
5	518 71	Length 2 m
5	518 72	Length 3 m
5	518 73	Length 5 m
5	518 66	Length 1 m
5	518 67	Length 2 m
5	518 68	Length 3 m
5	518 69	Length 5 m

(1) in metre(s)



Accessory connection equipment

Complete flexibility with the new LCS² zone boxes: centralisation of connections close to the workstation, coexistence of copper and fibre optics



> Flexible installation with lines in reserve to meet future requirements quickly



- > Reliable and fast connection to the LCS² zone box with sockets with copper and fibre optic feedthrough and RJ 45/RJ 45 cords
- > Guaranteed performance across the whole LCS² system

Legrand cabling system LCS² category 6A zone distribution boxes

NEW



335 40

Pack	Cat.Nos	Zone distribution boxes
1	335 40	For distribution of low current in a zone fitted with 1 to 12 RJ 45 sockets Centralise connections to guarantee flexibility and adaptability of the installation Installed on false ceiling or false floor Connect to the patch panel or the floor cabinet Connection to workstation for RJ 45 cords Can take switch Cat.No 335 02 or PoE injector Cat.No 335 01 or 6 connector units Cat.No 335 76 Conform to standards UTE C 15-900, NF C 15-100, NF C 20-730, EN 50-174.2, CEI 60950, ISO/IEC 11801 Ed. 2.0, EN 50173-2 and TIA/EIA 568 Colour code TIA/EIA 568 A and C Cords and cables: ISO 11801 Ed.2.0, EN 50173-1, TIA/EIA 568 Technical characteristics: - polycarbonate PC hood - polypropylene PP base - RAL 7035 - hold connector units in place in the box: 100 N - cables anchored on support using Colring cable ties Self-assembly zone distribution box Used for mounting LCS² RJ 45 connector blocks cat. 6A (p. 63), cat. 6 (p. 64) and cat. 5e (p. 70), fibre optic accessories or blanking plates

Legrand cabling system LCS²

category 6A

RJ 45 sockets



765 73



765 76



794 76



765 24



765 25



765 99



673 46 + enjoliveur Titane 685 51

Sockets with LCS² connector with fast connection thanks to integrated crimping
Take AWG 22 single-core cables up to AWG 26 and AWG multicore cables
Contacts marked with dual colour code and wiring schemes T 568 A and T 568 B
Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-1 and TIA/EIA 568C

Pack	Cat.Nos	Mosaic RJ 45 sockets cat. 6A
10	765 73	STP - 1 module
10	794 73	360° metal shielding
		○ White
		● Aluminium
10	765 76	STP - 2 modules
10	794 76	360° metal shielding
		○ White
		● Aluminium
10	765 24	○ White with green shutter
10	765 25	○ White with orange shutter
10	765 08	○ White
5	765 99	STP with controlled access - 2 modules
		360° metal shielding
		Supplied with 2 keys for 5 sockets
		○ White with red shutter
10	765 71	UTP - 1 module
10	794 71	○ White
10	765 26	● Aluminium
10	765 27	○ White with green shutter
		○ White with orange shutter
10	765 74	UTP - 2 modules
10	794 74	○ White
		● Aluminium
5	765 90	UTP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
		○ White with red shutter
10	765 09	○ White



Mosaic Programme audio/video sockets

see p. 84

Pack	Cat.Nos	Arteor RJ 45 socket cat. 6A
10	572 306	360° metal shielding
10	572 806	STP - 1 module
10	572 352	○ White
10	572 852	● Magnesium
10	572 351	○ White with green shutter
10	572 851	● Magnesium with green shutter
		○ White with orange shutter
		● Magnesium with orange shutter
5	572 350	STP with controlled access - 2 modules
5	572 850	Supplied with 2 keys for 5 sockets
		○ White with red shutter
		● Magnesium with red shutter
10	572 349	UTP - 1 module
10	572 849	○ White
10	572 359	● Magnesium
10	572 859	○ White with green shutter
10	572 358	● Magnesium with green shutter
10	572 858	○ White with orange shutter
		● Magnesium with orange shutter
5	572 357	UTP with controlled access - 2 modules
5	572 857	Supplied with 2 keys for 5 sockets
		○ White with red shutter
		● Magnesium with red shutter

Pack	Cat.Nos	Celiane RJ 45 socket cat. 6A
10	673 46	STP - 360° metal shielding
		To create a 1-gang socket, combine mechanism Cat.No 673 46 and a cover plate Cat.No 682 51 (white) or Cat.No 685 51 (titanium). To create a 2-gang socket, combine 2 mechanisms Cat.Nos 673 46 and a cover plate Cat.No 682 52 (white) or Cat.No 685 52 (titanium)
10	673 47	UTP
		To create a 1-gang socket, combine mechanism Cat.No 673 46 and a cover plate Cat.No 682 51 (white) or Cat.No 685 51 (titanium). To create a 2-gang socket, combine 2 mechanisms Cat.Nos 673 46 and a cover plate Cat.No 682 52 (white) or Cat.No 685 52 (titanium)
10	331 54	Keystone RJ 45 socket cat. 6A
10	331 55	STP socket - metal shielding 360° with fast connection thanks to integrated crimping
		UTP socket - metal shielding 360° with fast connection thanks to integrated crimping

Legrand cabling system LCS² category 6

patch panels, blocks of connectors



335 62



335 90



335 65



Cat. 6 connector
STP shielded


Pack	Cat.Nos	Patch panels cat. 6 24 x RJ 45 quick-fixing connectors
		Panels supplied with quick-fixing All enclosures or cabinets general assembly Panels ensure automatic grounding of each connector Fitted with rear cable guide to hold cables during maintenance Fitted with 4 units of 6 LCS ² RJ 45 connectors cat. 6 with fast connection thanks to integrated crimping, with colour code and wiring schemes T 568 A and T 568 B Supplied with numbered colour labels Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-2 and TIA/EIA 568C 19" panel - 1 U
1	335 61	UTP panel - 8 contacts
1	335 67	UTP high density panel - 8 contacts
1	335 62	FTP panel - 9 contacts
1	335 68	FTP high density panel - 9 contacts
1	335 63	STP panel - metal shielding 360°
		UTP through panel
1	335 89	24 x RJ 45 connectors UTP through panel

Pack	Cat.Nos	Modular panels
		Panels supplied with quick-fixing General all-purpose assembly of all enclosures or cabinets Panels ensure automatic earthing of each connector Fitted with rear cable guide to hold cables during maintenance Empty panels to be fitted with 4 units Take the following equipment: - 6 LCS ² RJ 45 connector units - telephone inlet units - fibre optic units - PoE injector units - video streaming units - switch units - telephone/Ethernet doubler units - copper/fibre optic converter units - blanking plates 19" panel - 1 U
1	335 90	

Pack	Cat.Nos	Units of 6 x RJ 45 connectors cat. 6
		Fitted with 6 x LCS ² RJ 45 connectors cat. 6 with fast connection thanks to integrated crimping, with colour code and wiring schemes T 568 A and T 568 B Supplied with colour labels Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568
2	335 64	UTP unit - 8 contacts
2	335 65	FTP unit - 9 contacts
2	335 66	STP unit - metal shielding 360°
10	335 91	Blanking plate for 19" panel - Black


NEW

Legrand cabling system LCS² category 6 cables

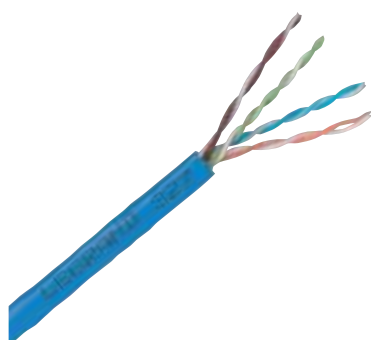

327 54

Legrand cabling system LCS² category 6 cords

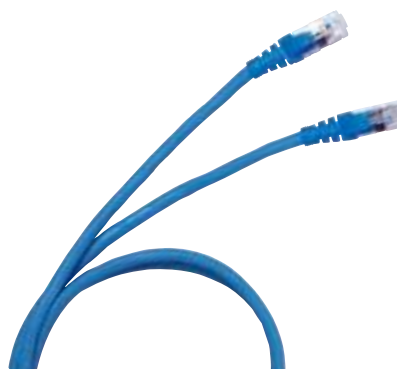

517 62

Pack	Cat.Nos	Cables for local networks cat. 6
		Cables 4 pairs or 2 x 4 twisted pairs 100 ohms Blue RAL 5015 Colour code TIA/EIA Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568C
		U/UTP - 4 pairs
305 ⁽¹⁾	327 54	Length 305 m Supplied in cardboard box. Weight 16 kg
500 ⁽¹⁾	328 61	Length 500 m Supplied on reel. Weight 18 kg
1000 ⁽¹⁾	328 71	Length 1000 m Supplied on reel
305 ⁽¹⁾	327 55	Length 305 m Supplied in cardboard box. Weight 13 kg
500 ⁽¹⁾	328 62	Length 500 m Supplied on reel. Weight 19 kg
1000 ⁽¹⁾	328 72	Length 1000 m Supplied on reel
		U/UTP - 2 x 4 pairs
500 ⁽¹⁾	328 63	Length 500 m Supplied in cardboard box. Weight 38 kg
		F/UTP - 4 pairs
305 ⁽¹⁾	328 56	Length 305 m Supplied on reel. Weight 17 kg
500 ⁽¹⁾	327 56	Length 500 m Supplied on reel. Weight 25 kg
		F/UTP - 4 pairs
305 ⁽¹⁾	328 57	Length 305 m Supplied in cardboard box. Weight 17 kg
500 ⁽¹⁾	327 58	Length 500 m Supplied on reel. Weight 25 kg
		F/UTP - 2 x 4 pairs
50 ⁽¹⁾	327 76	Length 500 m Supplied on reel. Weight 48 kg
500 ⁽¹⁾	328 58	Length 500 m Supplied on reel. Weight 45 kg
		SF/UTP - 4 pairs
500 ⁽¹⁾	327 57	Length 500 m Supplied on reel. Weight 29 kg
500 ⁽¹⁾	327 59	Length 500 m Supplied on reel. Weight 30 kg
		SF/UTP - 2 x 4 pairs
500 ⁽¹⁾	328 59	Length 500 m Supplied on reel. Weight 52 kg

Pack	Cat.Nos	RJ 45 patch cords and user cords cat. 6
		RJ 45 - RJ 45 right U/UTP unscreened impedance 100 Ω
		PVC
1	517 72	Length 1 m
1	517 73	Length 2 m
1	517 74	Length 3 m
1	517 75	Length 5 m
		LSZH
1	518 62	Length 1 m
1	518 63	Length 2 m
1	518 64	Length 3 m
1	518 65	Length 5 m
		PVC
1	517 62	Length 1 m
1	517 63	Length 2 m
1	517 64	Length 3 m
5	517 65	Length 5 m
		LSZH
1	518 54	Length 1 m
1	518 55	Length 2 m
1	518 56	Length 3 m
1	518 57	Length 5 m
		PVC
		SF/UTP shielded impedance 100 Ω
5	517 52	Length 1 m
5	517 53	Length 2 m
5	517 54	Length 3 m
5	517 55	Length 5 m

(1) in metre(s)

Legrand cabling system LCS² category 6

zone distribution boxes



335 46



335 40




335 40 fitted with SC fibre optic unit, accessory
Cat.No 335 20 and a 6 x RJ 45 connector unit




335 20 accessory for
fibre optics

Legrand cabling system LCS² category 6

ords specifically for zone distribution boxes



517 57

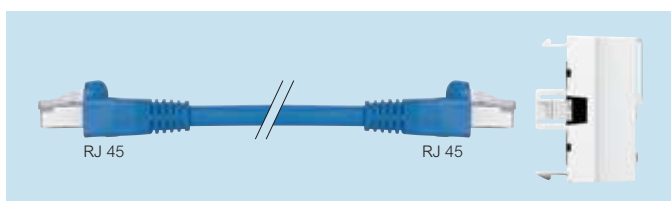

Connection principle

Pack	Cat.Nos	Zone distribution boxes
		For distribution of low current in a zone fitted with 1 to 12 RJ 45 sockets Centralise connections to guarantee flexibility and adaptability of the installation Installed on false ceiling or false floor Connect to the patch panel or the floor cabinet Connection to an RJ 45 socket with stripped cord or to a Mosaic RJ 45 socket with copper feedthrough with an RJ 45/RJ 45 cord IP 21 - IK 07 Conform to standards UTE C 15-900, NF C 15-100, NF C 20-730, EN 50-174.2, CEI 60950, ISO/IEC 11801 Ed. 2.0, EN 50173-2 and TIA/EIA 568 Colour code TIA/EIA 568 A and C Cords and cables: ISO 11801 Ed.2.0, EN 50173-1, TIA/EIA 568 Technical characteristics: - polycarbonate PC hood - polypropylene PP base - RAL 7035 - hold connector units in place in the box: 100 N - Cables anchored on support using Colring cable ties Zone distribution boxes cat. 6 Fitted with 2 x 6 LCS² connector blocks RJ 45 cat. 6 and RJ 45 blanking plates Supplied with Colring cable ties
1	335 44	UTP
1	335 45	FTP
1	335 46	STP
1	335 40	Self-assembly zone distribution box Used for mounting LCS² RJ 45 connector blocks cat. 6 (p. 64)

Pack	Cat.Nos	Cords cat. 6 - RJ 45/stripped AWG 24
		RJ 45 - straight stripped Clip on and off in the zone distribution boxes and connection via LCS² connector of an RJ 45 socket by the stripped side Cords prepared in factory, "ready for wiring" Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568 Blue RAL 5015 Wiring in T 568 B
		U/UTP unscreened impedance 100 Ω
4	517 57	Length 8 m
4	517 58	Length 15 m
4	517 59	Length 20 m
		F/UTP screened impedance 100 Ω
4	517 96	Length 8 m
1	517 97	Length 15 m
4	517 98	Length 20 m
		Cords cat. 6 - RJ 45/RJ 45
		For direct connection via RJ 45 male plug to the zone distribution box and to the RJ 45 socket with copper feedthrough to ensure: - safe connection - speed and reliability of connection Blue RAL 5015
		U/UTP unscreened impedance 100 Ω
4	515 10	Length 8 m
4	515 11	Length 15 m
4	515 12	Length 20 m
		F/UTP screened impedance 100 Ω
4	515 13	Length 8 m
4	515 14	Length 15 m
4	515 15	Length 20 m

NEW


Legrand cabling system LCS² category 6 feedthrough sockets

Legrand cabling system LCS² category 6 110 Cross Connect System blocks and patch cords cat. 6



786 22

Pack	Cat.Nos	Sockets with copper feedthrough cat. 6
		Easy connection at the rear through simply attaching a male plug Ensures network access for the RJ 45 socket Used to create links cat. 6 According to standards ISO 11801 Ed.2, EN 50173-1 and TIA/EIA 568 within the framework of operation with zone distribution boxes Multidirectional cord entry Installation possible in all supports with min. 40 mm depth 2 modules
10	Mosaic 786 22	Cat. 6 UTP Mosaic  ○ White ● Aluminium
10	786 26	
10	786 23	Cat. 6 FTP Mosaic  ○ White ● Aluminium
10	786 27	
10	Arteor 572 331	Cat. 6 UTP Arteor  ○ White ● Magnesium
10	572 831	
10	572 333	Cat. 6 FTP Arteor  ○ White ● Magnesium
10	572 833	

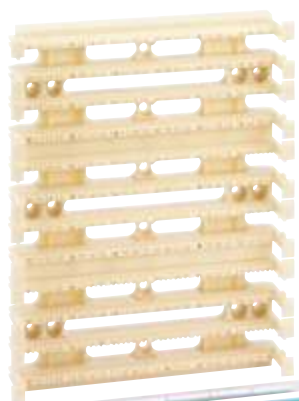

633 929



633 970



633 972



633 973

Pack	Cat.Nos	Block kits
		• block connection • 110C connecting blocks • includes base wiring block • label holders for designation
		With legs
1	633 924	48-pair in 50-pair footprint
1	633 925	96-pair in 100-pair footprint
1	633 926	288-pair in 300-pair footprint
		Without legs
1	633 927	48-pair in 50-pair footprint
1	633 928	96-pair in 100-pair footprint
1	633 929	288-pair in 300-pair footprint

		Patch cords
		110/110 - 4 pairs
10	633 912	Length 1 m
10	633 913	Length 1.5 m
		110/RJ 45 - 4 pairs
10	633 916	Length 1.5 m
10	633 917	Length 3 m

		Accessories
		110 tool
1	332 60	110 tool
1	332 61	Replacement blade
		Designation labelling kits
5	633 968	Pack of two clear strips and white paper
		Rivets
1	633 971	Rivets (pack of 12)
		110 jumper throughs
1	633 969	With legs, 27.3 x 6.83 x 11.9 mm
1	633 970	Without legs, 21.6 x 6.83 x 6.83 mm
		19" enclosure mount 110 panel
1	633 972	Panel for 2 x 100-pair blocks without legs, 2 U
1	633 973	Panel for 2 x 100-pair blocks and two throughs without legs, 4 U

Legrand cabling system LCS²

category 6

RJ 45 sockets



Sockets with LCS² connector with fast connection thanks to integrated crimping

Take AWG 22 single-core cables up to AWG 26 and AWG 24 multicore cables

Contacts marked with dual colour code and wiring schemes T 568 A and T 568 B. Conforming to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568

Mosaic RJ 45 sockets cat. 6

Pack	Cat.Nos	
10	765 61	UTP - 1 module
10	794 61	○ White
10	765 81	● Aluminium
		○ White antimicrobial
10	765 64	UTP - 2 modules
10	794 64	○ White
		● Aluminium
		UTP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	765 94	○ White with red shutter
		UTP 90° - 2 modules
		Vertical snap-on socket for column module
10	765 91	○ White
		UTP 45° - 2 modules
1	765 03	○ White
		UTP 45° - 2 x RJ 45 - 2 modules
1	765 04	○ White
		UTP retractable RJ 45 socket - 4 modules
		With integrated retractable cord (0.9 m)
		Winds up automatically with a pushbutton
1	765 32	○ White
		UTP 2 x RJ 45 with Soluclip accessory - 3 modules
		For snap-on mounting on DLP trunking with 45 mm cover
5	765 44	○ White

Mosaic RJ 45 sockets cat. 6 (continued)

Pack	Cat.Nos	
10	765 62	FTP - 1 module
10	794 62	○ White
10	765 82	● Aluminium
		○ White antimicrobial
10	765 65	FTP - 2 modules
10	794 65	○ White
10	765 22	● Aluminium
10	765 23	○ White with green shutter
		○ White with orange shutter
		FTP 2 x RJ 45 with Soluclip accessory - 3 modules
		For snap-on mounting on trunking with 45 mm cover
5	765 46	○ White
		FTP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	765 95	○ White with red shutter
		FTP 45° - 2 modules
10	765 05	○ White
		FTP 2 x RJ 45 45° - 2 modules
5	765 06	○ White
		FTP retractable RJ 45 sockets - 4 modules
		With integrated retractable cord (0.9 m)
		Winds up automatically with a pushbutton
1/10	765 33	○ White
1/10	794 33	● Aluminium
		FTP 90° - 2 modules
		Vertical snap-on socket for column module
10	765 92	○ White
10	794 92	● Aluminium
		Shielded STP - 1 module
10	765 63	○ White
5	765 83	○ White antimicrobial
		Shielded STP - 2 modules
10	765 66	○ White
		Shielded STP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	765 96	○ White with red shutter
		Shielded STP 90° - 2 modules
		Vertical snap-on socket for column module
10	765 93	○ White

Legrand cabling system LCS²

category 6

RJ 45 sockets



673 45 + cover plate titanium 685 51



778 91



695 69

Pack	Cat.Nos	Arteor RJ 45 socket cat. 6
10	572 302	UTP - 1 module ☐ White ☒ Magnesium ☐ White with orange shutter ☒ Magnesium with orange shutter ☐ White with green shutter ☒ Magnesium with green shutter
10	572 802	
10	572 354	
10	572 854	
10	572 355	
10	572 855	
10	572 314	UTP - 2 modules ☐ White ☒ Magnesium
10	572 814	
10	572 324	UTP - 2 modules - round ☐ White ☒ Magnesium
10	572 824	
5	572 353	UTP with controlled access - 2 modules Supplied with 2 keys for 5 sockets ☐ White with red shutter ☒ Magnesium with red shutter
5	572 853	
1	572 339	UTP retractable RJ 45 sockets - 4 modules With integrated retractable cord (0.9 m) Winds up automatically with a pushbutton ☐ White ☒ Magnesium
1	572 839	
10	572 322	FTP - 1 module ☐ White ☒ Magnesium
10	572 822	
10	572 316	FTP - 2 modules ☐ White ☒ Magnesium
10	572 816	
10	572 323	Shielded STP - 1 module ☐ White ☒ Magnesium
10	572 823	
10	572 317	Shielded STP - 2 modules ☐ White ☒ Magnesium
10	572 817	

Pack	Cat.Nos	Celiene RJ 45 sockets cat. 6
		UTP socket To create a 1-gang socket, combine mechanism Cat.No 673 44 and a cover plate Cat.No 682 51 (white) or Cat.No 685 51 (titanium) To create a 2-gang socket, combine 2 mechanisms Cat.No 673 44 and a cover plate Cat.No 682 52 (white) or Cat.No 685 52 (titanium)
10	673 44	UTP socket
10	673 54	UTP retractable RJ 45 socket - 4 modules With integrated retractable cord (0.9 m) Winds up automatically with a pushbutton To create a 1-gang socket, combine mechanism Cat.No 673 54 and a cover plate Cat.No 682 55 (white) or Cat.No 685 55 (titane)
10	673 45	FTP socket To create a 1-gang socket, combine mechanism Cat.No 673 45 and a cover plate Cat.No 682 51 (white) or Cat.No 685 51 (titanium). To create a 2-gang socket, combine 2 mechanisms Cat.Nos 673 45 and a cover plate Cat.No 682 52 (white) or Cat.No 685 52 (titanium)
10	673 45	FTP socket
10	673 55	FTP retractable RJ 45 socket - 4 modules With integrated retractable cord (0.9 m) Winds up automatically with a pushbutton To create a 1-gang socket, combine mechanism Cat.No 673 55 and a cover plate Cat.No 682 55 (white) or Cat.No 685 55 (titane)
10	673 96	STP socket To create a 1-gang socket, combine mechanism Cat.No 673 96 and a cover plate Cat.No 682 51 (white) or Cat.No 685 51 (titanium). To create a 2-gang socket, combine 2 mechanisms Cat.No 673 46 and a cover plate Cat.No 682 52 (white) or Cat.No 685 52 (titanium)
10	673 96	STP socket
10	331 81	Keystone RJ 45 sockets cat. 6 UTP socket with fast connection
10	778 91	Soliroc RJ 45 sockets cat. 6 - IK 10 IP 20 For at-risk areas or areas with no surveillance FTP socket
5/100	695 69	Plexo RJ 45 sockets cat. 6 - IP 55 closed flap IK 07 Protection against water, dust For industrial sites
1/20	695 61	
1	695 81	
		FTP socket ☒ Grey/white UTP socket ☒ Grey/white Adapter for RJ 45 socket Weatherproofing ensured (IP 44) plug inserted ☒ Grey/white

Mosaic and Arteor sockets with copper feedthrough (p. 67)

Mosaic and Arteor audio/video sockets (p. 84)

Legrand cabling system LCS² category 5e

patch panels, blocks of connectors



335 52



335 90



335 55



FTP cat. 5e connector


Pack	Cat.Nos	Patch panels cat. 5e 24 x RJ 45 connectors
1	335 51	UTP panel Panels supplied with quick-fixing All enclosures or cabinets general assembly Panels ensure automatic grounding of each connector Fitted with rear cable guide to hold cables during maintenance Fitted with 4 units of 6 LCS ² RJ 45 connectors cat 5e with fast connection thanks to integrated crimping, with colour code and wiring schemes T 568 A and T 568 B Supplied with colour labels numbered from 1 to 24 Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568 19" panel - 1 U
1	335 52	FTP panel FTP panel - 9 contacts
1	335 88	UTP through panel 24 RJ 45 connectors UTP through panel

Pack	Cat.Nos	Modular panels
1	335 90	Panels supplied with fast assembly All enclosures or cabinets general assembly Panels ensure automatic grounding of each connector Fitted with rear cable guide to hold cables during maintenance Modular empty panels for up to 4 units Takes the following equipment: - units of 6 LCS ² RJ 45 connectors - units for telephone inlets - fibre optic units - PoE injector units - video streaming units - switch units - telephone/Ethernet doubler units - copper/fibre optic converter units - blanking plates 19" panel - 1 U

Pack	Cat.Nos	Units of 6 x RJ 45 connectors cat. 5e
2	335 54	Fitted with 6 x LCS ² RJ 45 connectors cat. 5e with fast connection thanks to integrated crimping, with colour code and wiring schemes T 568 A and T 568 B
2	335 55	Supplied with colour labels
10	335 91	Conforms to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568
		UTP unit
		FTP unit
		Blanking plate for 19" panel - Black

NEW

Legrand cabling system LCS² category 5e cables

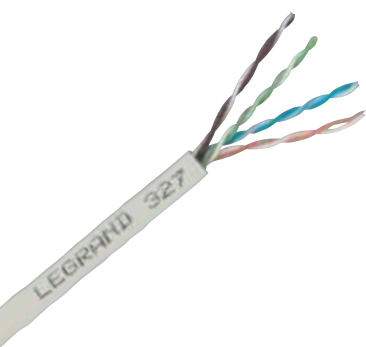

328 50

Legrand cabling system LCS² category 5e cords



516 40

Pack	Cat.Nos		Cables for local networks cat. 5e
			4 twisted pair cables 100 ohms LSZH sleeve: non-halogen Grey RAL 7035 Colour code TIA/EIA
	LSZH	PVC	U/UTP - 4 pairs
305 ⁽¹⁾	327 50		Length 305m Supplied in cardboard box. Weight 10 kg
500 ⁽¹⁾	328 53		Length 500 m Supplied on reel. Weight 15 kg
1000 ⁽¹⁾	328 73		Length 1000 m Supplied on reel
305 ⁽¹⁾		327 51	Length 305m Supplied in cardboard box. Weight 9 kg
500 ⁽¹⁾		328 54	Length 500 m Supplied on reel. Weight 15 kg
1000 ⁽¹⁾		328 74	Length 1000 m Supplied on reel
			U/UTP - 2x4 pairs
500 ⁽¹⁾	328 55		Length 500 m Supplied on reel. Weight 34 kg
500 ⁽¹⁾		327 73	Length 500 m Supplied on reel
			F/UTP - 4 pairs
305 ⁽¹⁾	327 52		Length 305 m Supplied in cardboard box. Weight 12 kg
500 ⁽¹⁾	328 50		Length 500 m Supplied on reel. Weight 21 kg
305 ⁽¹⁾		327 53	Length 305 m Supplied by box. Weight 11 kg
500 ⁽¹⁾		328 51	Length 500 m Supplied on reel. Weight 20 kg
			F/UTP - 2x4 pairs
500 ⁽¹⁾	327 74		Length 500 m Supplied on reel. Weight 38 kg
500 ⁽¹⁾		328 52	Length 500 m Supplied on reel. Weight 34 kg

Pack	Cat.Nos		RJ 45 patch cords and user cords cat. 5e
			RJ 45 - RJ 45 right
	PVC		U/UTP unscreened impedance 100 Ω Grey
1	516 36		Length 1m
1	516 37		Length 2m
1	516 38		Length 3m
1	516 39		Length 5m
			F/UTP screened impedance 100 Ω Grey
1	516 40		Length 1 m
1	516 41		Length 2 m
1	516 42		Length 3 m
1	516 43		Length 5 m

(1) in metre(s)

Legrand cabling system LCS² category 5e

zone distribution boxes



335 40



335 40 fitted with SC fibre optic unit, accessory
Cat.No. 335 20 and a 6 x RJ 45 connector unit

Pack Cat.Nos Zone distribution boxes

1	335 40	For distribution of low current in a zone fitted with 1 to 12 RJ 45 sockets Centralise connections to guarantee flexibility and adaptability of the installation Installed on false ceiling or false floor Connect to the patch panel or the floor cabinet Connection to an RJ 45 socket with stripped cord or to a Mosaic RJ 45 socket with copper feedthrough with an RJ 45/RJ 45 cord IP 21 - IK 07 Conform to standards UTE C 15-900, NF C 15-100, NF C 20-730, EN 50-174.2, CEI 60950, ISO/IEC 11801 Ed. 2.0, EN 50173-2 and TIA/EIA 568 Colour code and wiring schemes T 568 A and T 568 B Cords and cables: ISO 11801 Ed.2.0, EN 50173-1, TIA/EIA 568 Technical characteristics: - polycarbonate PC hood - polypropylene PP base - RAL 7035 - hold connector units in place in the box: 100 N - Cables anchored on support using Colring cable ties Self-assembly zone distribution box Used for mounting LCS² RJ 45 connector blocks cat. 5e (p. 70)
---	--------	--

Legrand cabling system LCS² category 5e


cords specifically for zone distribution boxes
feedthrough sockets



515 03



786 25

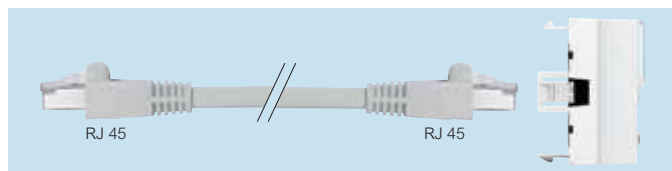

Connection principle

Pack Cat.Nos Cords cat. 5e - RJ 45 / stripped

		RJ 45 - straight stripped. Clip on and off in the zone distribution boxes and RJ 45 socket connection via LCS² connector via the stripped side. Cords prepared in factory, "ready for wiring". Conform to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568. Grey RAL 7035 Wiring in T 568 B U/UTP unscreened impedance 100 Ω Length 8 m Length 15 m Length 20 m F/UTP screened impedance 100 Ω Length 8 m Length 15 m Length 20 m
4	517 90	
4	517 91	
4	517 92	
4	517 93	
4	517 94	
4	517 95	
		Cords cat. 5e - RJ 45/RJ 45 For direct connection via RJ 45 male plug to the zone distribution box and to the RJ 45 socket with copper feedthrough to ensure: - safe connection - speed and reliability of connection Grey RAL 7035 U/UTP unscreened impedance 100 Ω Length 8 m Length 15 m Length 20 m F/UTP unscreened impedance 100 Ω Length 8 m Length 15 m Length 20 m
4	515 00	
4	515 01	
4	515 02	
4	515 03	
4	515 04	
4	515 05	

Sockets with copper feedthrough cat. 5e

Easy connection at the rear through simply attaching a male plug. Ensures network access for the RJ 45 socket. Used to create cat. 5e links. According to standards ISO 11801 Ed.2, EN 50173-1 and TIA/EIA 568 within the framework of operation with zone distribution boxes. Multidirectional cord entry. Installation possible in all supports with a min. 40 mm depth. 2 modules

Cat. 5e UTP

10	Mosaic 786 20		○ White
10	786 24		● Aluminium

10	Arteor 572 330		○ White
10	572 830		● Magnesium

Cat. 5e FTP

10	Mosaic 786 21		○ White
10	786 25		● Aluminium

10	Arteor 572 332		○ White
10	572 832		● Magnesium

Legrand cabling system LCS²

category 5e

RJ 45 sockets



765 52



794 55



695 57

Sockets with LCS² connector with fast connection thanks to integrated crimping
Take AWG 22 single-core cables up to AWG 26 and AWG 26 multicore cables
Contacts marked with dual colour code and wiring schemes T 568 A and T 568 B
Side cable inlet for easy installation in all supports
Conforms to standards ISO/IEC 11801 Ed. 2.0, EN 50173-1 and TIA/EIA 568

Pack	Cat.Nos	Mosaic RJ 45 sockets cat. 5e
10	765 51	UTP - 1 module
10	794 51	○ White ● Aluminium
10	765 54	UTP - 2 modules
10	794 54	○ White ● Aluminium
5	765 97	UTP with controlled access - 2 modules Supplied with 2 keys for 5 sockets ○ White with red shutter
5	765 41	UTP - 2 x RJ 45 with Soluclip accessory - 3 modules For snap-on mounting on DLP trunking with 45 mm cover ○ White
1	765 30	UTP retractable RJ 45 socket - 4 modules With integrated retractable cord (0.9m) Winds up automatically with a pushbutton ○ White
10	765 01	UTP 45° - 2 modules ○ White
5	765 02	2 x RJ 45 UTP 45° - 2 modules ○ White
10	765 52	FTP - 1 module
10	794 52	○ White ● Aluminium
10	765 55	FTP - 2 modules
10	794 55	○ White ● Aluminium
5	765 42	FTP - 2 x RJ 45 with Soluclip accessory - 3 modules For snap-on mounting on Mosaic trunking with 45 mm cover ○ White

Pack	Cat.Nos	Arteor RJ 45 socket cat. 5e
10	572 303	UTP - 1 module
10	572 803	○ White ● Magnesium
10	572 304	UTP - 2 modules
10	572 804	○ White ● Magnesium
10	572 315	FTP - 1 module
10	572 815	○ White ● Magnesium
10	331 80	Keystone RJ 45 socket cat. 5e UTP socket with fast crimping connection
1/20	695 57	Plexo RJ 45 sockets, cat. 5e - IP 55 closed flap IK 07 Protection against water, dust For industrial sites
1/20	695 56	FTP socket ○ Grey/White UTP socket ○ Grey/White
1	695 81	Adapter for RJ 45 socket Ensures weatherproofing (IP 44) with the plug inserted ○ Grey/White

Mosaic and Arteor sockets with copper feedthrough (p. 67)

Mosaic audio/video sockets

see p. 84

Legrand cabling system LCS²

LCS² system additional products cat. 6A, LCS² cat. 6, LCS² cat. 5e



335 39



335 34



335 12



335 16



335 02



332 93



335 01



327 37

Pack	Cat.Nos	Modular panels
1	335 90	Panels supplied with captive screws and cage nuts or with quick fixing Universal mounting for all enclosures or cabinets Panels ensure automatic earthing of each connector Fitted with rear cable guide to hold cables in place during maintenance Modular empty panels for up to 4 units Take the following equipment: - units of 6 x LCS² RJ 45 connectors - units for telephone inlets - fibre optic units - PoE injector units - video streaming units - switch units - telephone/Ethernet doubler units - copper/fibre optic converter units - blanking plates 19" panel - 1 U

Pack	Cat.Nos	Doubler units
2	335 54	Units of 6 x LCS ² RJ 45 doubler connectors for fast tool-free connection
2	335 55	Used with doubler sockets (p. 75)
10	335 91	UTP unit
		FTP unit
		Blanking plate for 19" panel - Black
1	335 39	Ethernet/Ethernet doublers 100 base T
1	335 38	FTP - 9 contacts
		UTP - 8 contacts
1	335 37	Telephone/Ethernet doublers 100 base T
1	335 36	FTP - 9 contacts
		UTP - 8 contacts
1	335 35	Telephone/telephone doubler
		45 contacts

Pack	Cat.Nos	Video streaming unit
1	335 34	Block of 6 "F" connectors for video circuits

Pack	Cat.Nos	Fibre optic units
		Clip directly onto fibre optic enclosure Cat.No 335 10 (p. 80), on the patch panels with fibre optic cassette Cat.No 335 11 (p. 80) or in the zone distribution boxes with fibre optic accessory Cat.No 335 20 (p. 82)
		Monomode fibre units (9/125 µm)
1	335 13	LC unit for 6 monomode fibres
1	335 12	SC unit for 6 monomode fibres
		Multimode fibre units (62.5 and 50/125 µm)
1	335 16	ST unit for 6 multimode fibres
1	335 17	SC unit for 6 multimode fibres
1	335 18	LC unit for 6 multimode fibres
1	335 19	High-density LC unit for 12 multimode fibres

Pack	Cat.Nos	Blanking plates
10	517 40	Set of 12 blanking plugs for RJ 45 LCS² connector
10	517 41	White
		Black
10	335 91	Blanking plate for 19" panel
		Black

Pack	Cat.Nos	Ethernet switches 100 Mbps
		Mounted in the patch panel
		Conform with standards IEEE 802-3, EN 500 81-1 and EN 500 82-1 (Conformity with EMC requirements)
		Switch units for patch panel
1	335 02	Clip directly onto the patch panels
		7 RJ 45 ports at the front, 1 of which is a cascade port
1	335 05	Power supply with transformer provided
		6 RJ 45 ports + 1 LC type optic port with front-mounted cascade 100 base FX type LC
		Power supply via transformer provided
1	332 93	Boxes to be installed on shelf
		5 RJ 45 port switch
		Power supply via transformer provided
1	332 91	Dimensions: 116 x 70 x 25
		8 RJ 45 port switch
		Power supply via transformer provided
		Dimensions: 171 x 98 x 29
1	332 81	Mini shelf
		For switch Cat.Nos 332 91/93
		Dimensions: 220 x 220 x 43 mm
		For horizontal, vertical or projecting mounting of the switch
		Supplied with system for retaining the live product

Pack	Cat.Nos	Copper/fibre optic converter units
		Simply and quickly permit copper to fibre conversion and vice versa
		Clip directly onto the patch panels
		Fitted with an SC type fibre optic connector
1	335 06	10/100 base T to 10/100 base FX type SC
1	335 07	1000 base T to 1000 base SX type SC

Pack	Cat.Nos	Midspan Power over Ethernet (PoE) injectors
1	335 01	4 inlets/outlets
		Used for supplying 4 Wi-Fi access points
		Clips directly onto a patch panel
1	327 37	1 inlet / outlet
		Used for supplying a Wi-Fi access point
		Direct connection to the patch panel

Legrand cabling system LCS²

doubler sockets and accessories



539 49


533 00 in position
(no cord supplied)


533 01



327 60



517 09

RJ 45 doubler sockets

Pack	Cat.Nos	
10	Mosaic 765 39	Ethernet/Ethernet
10	765 38	FTP - 9 contacts UTP - 8 contacts
10	Mosaic 765 37	Telephone/Ethernet
		FTP - 9 contacts
10	Arteor 572 336	FTP - 9 contacts
10	572 836	○ White ● Magnesium
10	Mosaic 765 36	UTP - 8 contacts
10	Arteor 572 335	UTP - 8 contacts
10	572 835	○ White ● Magnesium
10	Mosaic 765 35	Telephone/telephone
		45 contacts

Mobile doublers

10	327 83	Clip into RJ 45 sockets to double applications TV/computer network or telephone double connector
10	327 47	Telephone/telephone doubler
10	327 45	Computer network/telephone doubler
10	327 46	L1/L2 telephone doubler
10	327 48	Computer network/computer network double connector

Weatherproof adapters

10	Grey/White 695 80	IP 55 - IK 07 Allow all functions to be adapted 2 Mosaic modules IP 55 operation
1	695 79	Adapter with smoked flap
1	695 81	Adapter with smoked flap lockable by special tool Adapter for RJ socket ensuring IP 44 waterproofness cable already connected
1	919 45	Locking tool (used for changing vandal-proof screws)
1		Soliroc adapter
1	778 80	Used for adapting all functions 2 Mosaic modules IK 10 - IP 55
1	778 81	Adapter with flap Adapter without flap
5	539 49	Hypra adapter IP 55 adapter base

Cable protection accessories

Pack	Cat.Nos	
		Plastic material IP 66/67 guaranteed connection with the pair 533 02 IP 55 with no connection for base with shutter Protection for RJ 45 shielded or unshielded cables ensuring a link of category 5 Conform to standards of the IEC 60603-7 series and to standard IEC 61076-3-106 (version 5) Compatible with products on the market Compatible with products on the market conforming to the standards listed
3	533 00	Plug Integrated PE with sealing ring and clamping blades Tool-free assembly Ability to protect cables of category 5e
3	533 01	Flush-mounting base Locking base Supplied with RJ 45 female / female coupler cat. 5e
3	533 02	Kit Flush-mounting base + plug
3	533 03	Protective flap Fits on base Cat.No 533 01

RJ plugs for round cables

50	517 01	Gold-coated contacts 1.2 µm RJ 11 4 contacts, width 9.65 mm
50	517 02	RJ 12 6 contacts, width 9.65 mm
50	517 03	RJ 45 cat. 5e 8 contacts, width 11.70 mm
50	517 04	9 contacts, width 11.70 mm
50	517 06	RJ 45 sleeves Black
50	517 07	White

Stripping tool

1	332 62	Slits the sheath and releases the conductors by rotation For twisted pair cables Does not damage the conductors
1	327 60	Stripper For twisted pair and fibre optic cable
		Cutting pliers Cut wires cleanly without damaging the copper

Crimping tool for RJ 45 plugs

1	517 09	Used for crimping plugs RJ 4/6/8/9 contacts Ratchet control of crimping mechanism Able to cut and strip cables Tool with 3 crimping points High resistance steel material
---	--------	--

110 tool

1	332 60	110 tool
1	332 61	Replacement blade

Legrand cabling system LCS²

telephone panels, units and cables



335 79

Legrand cabling system LCS²

Wi-Fi
switches, distributors and Wi-Fi access points



779 00



332 80



Technical characteristics (p. 102)

Pack	Cat.Nos	Patch panel telephone 50 ports 110 connect
1	335 79	19" panel - 1 U

Cables for telephone networks cat. 3

1	328 91	PVC sleeve Colour white Colour code TIA/EIA U/UTP - 50 pairs Length 500m Supplied on reel
1	328 88	U/UTP - 100 pairs Length 500m Supplied on reel

Panels and units for incoming telephone


1	335 31	Panels assembled - 1 U Fitted with 4 LCS ² RJ 45 units of 12 ports with fast tool-free connection
1	335 30	3-6/4-5 contacts for digital telephone 4-5/7-8 contacts for analogue telephone
2	335 33	Incoming telephone units for self-assembly panels Fitted with 12 LCS ² RJ 45 ports with quick tool-free connection
2	335 32	3-6/4-5 contacts for digital telephone 4-5/7-8 contacts for analogue telephone

Flush-mounting 10/100 base T switches

For networking computer peripherals without a patch panel: computers, printers, servers, etc.
Possibility of extending an existing network by simply replacing an RJ 45 socket
Tool-free connection
Conform with standards IEEE 802.3 (Ethernet) and EN 500 81/82-2 (EMC requirements)
Installation in all supports with minimum 40 mm depth
6 ports at the front + 1 side RJ 45 connector for cabling and carrying out link tests
Port status display integrated into the RJ 45 connectors
Labelling of each port from 1 to 6 and marker holder for switch identification
6 modules

Non-manageable


1	Mosaic 779 01	PoE power supply (Power over Ethernet - standard 802.3 af)
1	779 00	230 V~ power supply



1	Arteor 572 084	PoE power supply (Power over Ethernet - standard 802.3 af) ○ White
1	572 884	PoE power supply (Power over Ethernet - standard 802.3 af) ● Magnesium
1	572 083	230 V~ power supply ○ White
1	572 883	230 V~ power supply ● Magnesium

Manageable

1	Mosaic 779 20	230 V~ power supply
1	Arteor 572 085	230 V~ power supply ○ White
1	572 885	230 V~ power supply ● Magnesium



Mosaic VDI distribution block without connectors

1	332 80	16 modules Dimensions: 135 x 223 x 57 mm For small patch panel For mounting a Mosaic switch Cat.Nos 779 00/01/20
---	--------	--

RJ 45 Patch cords and user cords cat. 6
(p. 71)

NEW

Legrand cabling system LCS²

Wi-Fi

switches, distributors and Wi-Fi access points (continued)



779 14



779 13

Manageable Wi-Fi access points 802.11a & b/g

Pack	Cat.Nos	
		Dual-band and dual-radio Conform with standards 802.11a and 802.11b/g Gross speed: 54 Mbps max. on each frequency (802.11a and 802.11g) simultaneously Can be installed in addition to a new or existing LCS/LCS ² structured cabling system to meet mobile working requirements Can be integrated into all compatible supports with minimum 40 mm depth Tool-free network connection via RJ 45 connector PoE power supply (Power over Ethernet - standard 802.3 af) The installation must include at least: - Wi-Fi access point - a PoE injector conforming with 802.3af (LCS ² unit format) to be installed in the patch panel The management function allows the network administrator to manage Wi-Fi access points remotely via a web interface Security via WPA2 encryption (802.11i) and 802.1x authentication Guest access: allows visitors free access to the Internet (access independent of the main Wi-Fi network). 4 modules
1	Mosaic 779 14	With RJ 45 socket on front
1	779 13	With no RJ 45 socket
	Arteor	
1	572 376	With RJ 45 socket on front
1	572 876	With RJ 45 socket on front
1	572 377	With no RJ 45 socket
1	572 877	With no RJ 45 socket
1	572 378	With no RJ 45 socket
1	572 878	With no RJ 45 socket
	Celiane	
1	673 66	With RJ 45 socket on front

Manageable Wi-Fi access points 802.11n

1	335 22	Wi-Fi surface-mounted access point 802.11n
1	335 21	Wi-Fi ceiling-mounted access point 802.11n

Wi-Fi network management system

1	335 25	Controller 5 APs Controller 5 APs
		Extension licence Ability to control up to 25 APs (for more than 25 APs please contact Legrand) Card that adds to the controller Cat.No 335 25
1	335 26	Up to 10 APs
1	335 27	Up to 25 APs
		Access point manager (disembedded) APs centralised configuration software
1	335 24	Access point manager

Midspan Power over Ethernet (PoE) injectors

1	335 01	4 inlets/outlets Used for supplying 4 Wi-Fi access points Clip directly onto a patch panel
1	327 37	1 inlet / outlet Used for supplying a Wi-Fi access point Direct connection to the patch panel

LCS² WI-FI ACCESS POINTS

Optimised installation of Wi-Fi access points

Wi-Fi performance is linked closely to its installation. It is the key for success in guaranteeing good connectivity for each user for each application.




KEY ELEMENTS FOR DETERMINING THE INSTALLATION AND SIZING OF A WI-FI NETWORK

- **Features of the building :** types of walls, surface, coverage area, environment, etc.
- **Wi-Fi network usages:** telephone and office information systems, public access, hot spots, etc., directly determine connection speed
- **Number of users in each room :** capacity in terms of who can connect to the Wi-Fi network.

THE LEGRAND WI-FI SYSTEM OFFER

The offer is based on quick and intuitive installation and settings.
Legrand's sales teams will help you with your projects.

Legrand cabling system LCS² fibre optic fibre cables

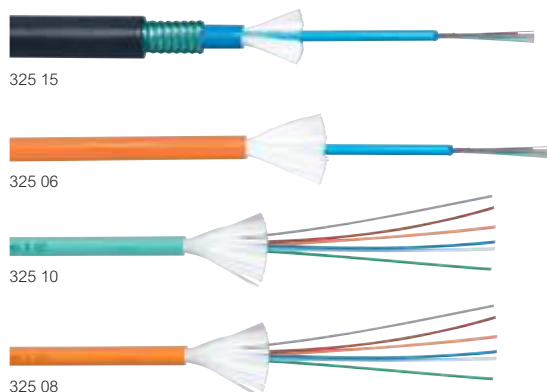

Fibre cables:

- fibre colour code: FOTAG
- standard: EN 50173-2, ISO IEC 11801

Pack	Cat.Nos		OS 1 singlemode optical cables (9/125 µm)
	Loose tube	900 µm Tight buffer	
2000 ⁽¹⁾	325 12		For 9/125 µm singlemode installations (OS 1) Yellow jacket Indoor/outdoor (universal) 6 fibres
2000 ⁽¹⁾	325 13		Outdoor, corrugated steel tape 6 fibres
2000 ⁽¹⁾	325 14	325 50	Indoor/outdoor (universal) 12 fibres
2000 ⁽¹⁾	325 15		Outdoor, corrugated steel tape 12 fibres
2000 ⁽¹⁾	325 51		Indoor/outdoor (universal) 24 fibres

	Loose tube	900 µm Tight buffer	OM 3 multimode optical cables (50/125 µm)
2000 ⁽¹⁾	325 10		For 50/125 µm multimode installations (OM 3) Green jacket 10 Gigabit Ethernet compliant Indoor/outdoor (universal) 6 fibres
2000 ⁽¹⁾	325 11		Indoor/outdoor (universal) 12 fibres
2000 ⁽¹⁾	325 53	325 52	Indoor/outdoor (universal) 24 fibres

	Loose tube	900 µm Tight buffer	OM 2 multimode optical cables (50/125 µm)
2000 ⁽¹⁾	325 54		For 50/125 µm multimode installations (OM 2) Orange jacket Indoor/outdoor (universal) 2 fibres
2000 ⁽¹⁾	325 59	325 55	Indoor/outdoor (universal) 4 fibres
2000 ⁽¹⁾	325 04	325 08	Indoor/outdoor (universal) 6 fibres
2000 ⁽¹⁾	325 05		Outdoor, corrugated steel tape 6 fibres
2000 ⁽¹⁾	325 06	325 09	Indoor/outdoor (universal) 12 fibres
2000 ⁽¹⁾	325 07		Outdoor, corrugated steel tape 12 fibres
2000 ⁽¹⁾	325 60	325 58	Indoor/outdoor (universal) 24 fibres


	900 µm Tight buffer	OM 1 multimode optical cables (62.5/125 µm) For 62.5/125 µm multimode installations (OM 1) Orange jacket Indoor/outdoor (universal) 6 fibres
2000 ⁽¹⁾	325 00	Indoor/outdoor (universal) 12 fibres
2000 ⁽¹⁾	325 01	Indoor/outdoor (universal) 12 fibres

(1) in metre(s)

customised fibre optic links



FIBRES PRE-FITTED WITH CONNECTORS

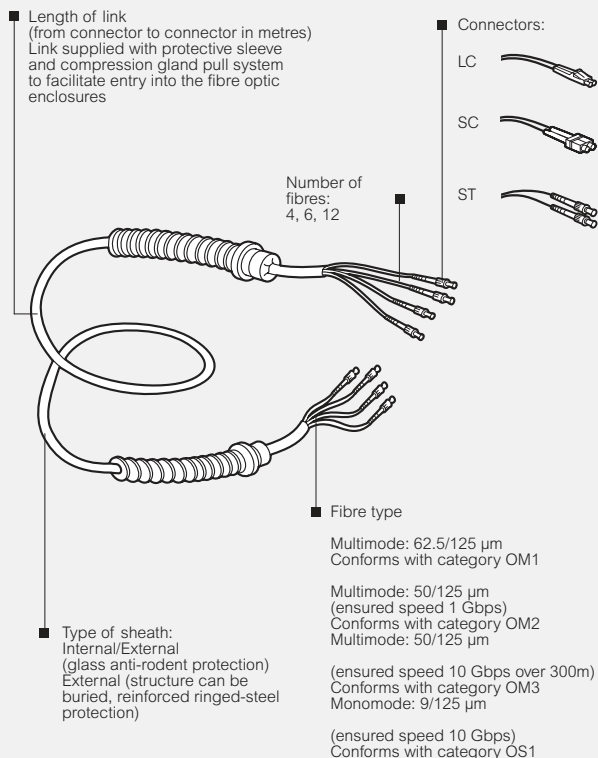

DOCUMENTS

Each link is supplied with a test report (fibre by fibre) and illustrated operating instructions



PACKAGING

According to length of link:
- packed on a reel
- packed on a ring
Connector protection by tube



Reel

NEW

Legrand cabling system LCS²

fibre optic

case and rapid crimping connectors



Installation and performance principles (p. 83)

Pack Cat.Nos Fast crimping connectors 900 µm

Pack	Cat.Nos	
		Prepolished connectors with ceramic ferrule Attenuation < 0.3 dB No glue, polishing or current supply required Unlimited storage period For exclusive use with case Cat.No 331 93
		Singlemode connectors (UPC)
10	331 12	LC connector for 9/125 µm fibre
10	331 13	SC connector for 9/125 µm fibre
		Multimode connectors
10	331 06	LC 10 Gb connector for 50/125 µm
10	331 07	SC 10 Gb connector for 50/125 µm
10	331 08	ST 10 Gb connector for 50/125 µm
10	331 09	LC connector for 62.5/125 µm fibre
10	331 10	SC connector for 62.5/125 µm fibre
10	331 11	ST connector for 62.5/125 µm fibre


Installation case for fast crimping connector

Pack	Cat.Nos	
1	331 93	Used for quick and simple installation of ST, SC or LC fibre connectors Complete kit supplied with: - installation instructions and video - stripping tool (for fibres and cables) - cleaving tool - microscope for checking the quality of the cut - crimping tool - accessories (scissors, marker, wipes)

Legrand cabling system LCS²

fibre optic

Mosaic glue-on connectors and sockets

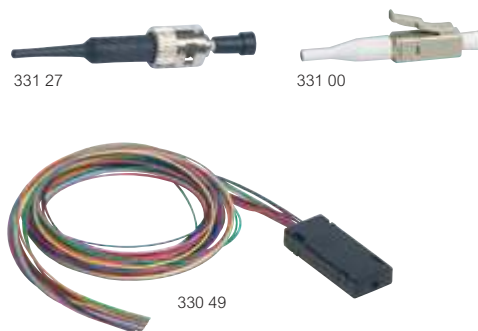

Pack Cat.Nos Precision fibre optic cleaver

Pack	Cat.Nos	
1	331 97	FO cleaver

Pigtails

Supplied with 900 µm sleeve, 1 m

10 Gb - 50/125 µm

1	326 22	SC connector
1	326 23	LC connector
1	326 27	6 x LC-PC connectors
1	326 26	12 x LC-PC connectors

9/125 µm

1	326 20	SC connector
1	326 21	LC connector
1	326 25	6 x LC-UPC connectors
1	326 24	12 x LC-UPC connectors

Thermoretractable sleeve for pigtails

1	327 44	40 mm - pack of 50 sleeves
---	--------	----------------------------

Glue-on connectors 50/125 and 62.5/125 µm

Supplied with sleeve 900 µm
Connectors with ceramic ferrule
Typical attenuation: 0.3 dB

10	331 27	ST connector
10	331 47	SC connector
10	331 00	LC connector

Breakout kits

For 900 µm of optical fibres
Take 250 µm fibre diameters

1	330 48	6 fibre breakout kit
1	330 49	12 fibre breakout kit

Legrand cabling system LCS² fibre optic 19" fibre optic drawers



"Tail-coat" enclosure rear
for easier cable entry



335 10 fitted with fibre optic units



335 13



335 12



335 16



335 11 fitted with fibre optic unit 335 17

Pack	Cat.Nos	19" optic drawer
1	335 10	Modular optic drawer Slide-in and modular drawer Limit switch stop with 45° slope Maximum capacity: - 24 x ST and SC connectors ST - 48 x LC connectors Depth 220 mm, height 1 U Supplied with screws and wiring accessories Takes up to 4 fibre optic units (see below)

Pack	Cat.Nos	Fibre optic cassette for patch panel
1	335 11	Ensures fibre coiling (from 2 to 12 fibres) Takes a fibre optic unit Cat.Nos 335 12/13/16/17/18/19 Used for linking copper and fibre optic blocks on the same LCS ² patch panel

Pack	Cat.Nos	Blanking plate for 19" panel
10	335 91	Black

Pack	Cat.Nos	Fibre optic units
1	335 10	Clip directly onto the fibre optic drawer Cat.No 335 10 or on the patch panels with fibre optic cassette Cat.No 335 11
1	335 13	Singlemode fibre units (9/125 µm) LC unit for 6 singlemode fibres
1	335 12	SC unit for 6 singlemode fibres
1	335 16	Multimode fibre units (62.5 and 50/125 µm) ST unit for 6 multimode fibres
1	335 17	SC unit for 6 multimode fibres
1	335 18	LC unit for 6 multimode fibres
1	335 19	High-density LC unit for 12 multimode fibres

Pack	Cat.Nos	Cassette for pigtails
1	329 07	12-fibre capacity

Pack	Cat.Nos	Switch/fibre optic unit
1	335 05	Clips directly onto the patch panels 6 x RJ 45 ports + 1 cascade LC type optic port at the front Power supply via transformer provided

Pack	Cat.Nos	Copper/fibre optic converter units
1	335 06	For simply and fast copper to fibre conversion and vice versa Clip directly onto the patch panels Fitted with an SC type fibre optic connector 10/100 base T to 10/100 base FX type SC
1	335 07	1000 base T to 1000 base SX type SC

NEW

Legrand cabling system LCS² fibre optic

19" high density fibre optic drawer



325 69 (not equipped)

Pack	Cat.Nos	19" high density fibre optic drawer
1	325 69	Modular fibre optic drawer Slide-in and modular drawer Maximum capacity: - 36 ST and SC connectors - 72 LC connectors Depth 220 mm, height 1 U Supplied with screws and wiring accessories Receives up to 3 fibre optic units below
Fibre optic units		
Clip directly onto the optic drawer Cat.No 325 69		
Singlemode fibre units (9/125 µm)		
1	325 73	LC duplex unit for 12 singlemode fibres - blue
1	325 74	LC quadriplex unit for 24 singlemode fibres - blue
1	325 70	ST duplex unit for 12 singlemode fibres - blue
1	325 71	SC duplex unit for 12 singlemode fibres - blue
1	325 72	MPO unit type A for 6 x 12 singlemode fibres - blue
Multimode fibre units (62.5 and 50/125 µm)		
1	325 78	LC duplex unit for 12 multimode fibres - beige
1	325 79	LC quadriplex unit for 24 multimode fibres - beige
1	325 75	ST duplex unit for 12 multimode fibres - beige
1	325 76	SC duplex unit for 12 multimode fibres - beige
1	325 77	MPO unit type A for 6 x 12 multimode fibres - beige
Accessory		
1	335 93	Blanking plate
Accessories common to 2 fibre optic drawers		
Cassette for pigtails		
1	329 07	12 fibre capacity
Bend limiting clip		
8	335 94	Fibre management bend limiting clip

Legrand cabling system LCS² fibre optic

fibre sockets



786 16



786 17



786 18

Pack	Cat.Nos	Fibre sockets
		Fitted with duplex feedthrough 2 inlets 2 outlets Used for connecting 2 fibres (fitted with their connector) Supplied with protective caps Fitted with transparent marker holder 2 modules
1	786 16	Socket with fibre optic feedthrough 2 x ST Bayonet connection (STII compatible)  ○ White
1	786 17	Socket with fibre optic feedthrough 2 x SC Push-pull connection  ○ White
1	786 18	Socket with fibre optic feedthrough 2 x LC Push-pull connection  ○ White
Surface-mounted box for 6 connectors		
1	369 00	Surface-mounting box for 6 units Holds six connectors, white 177.2 mm W x 29.5 mm H x 110 mm D
1	369 01	Connector LC Duplex 1-LC (2 fibres), beige adapter, phosphor-bronze, alignment sleeves 180° exit, flush, 1 unit
1	369 03	Connector SC Duplex 2-SC Simplex, Multimode, beige adapter, phosphor-bronze, alignment sleeves 180° exit, flush, 1 unit
1	369 02	Blank module 1 unit

Legrand cabling system LCS² fibre optic zone distribution boxes



335 40


335 20 accessoire
fibre optique


786 16

Pack Cat.Nos Zone distribution boxes

1	335 40	For distribution of low current in a zone fitted with 1 to 12 RJ 45 sockets Centralise connections to guarantee flexibility and adaptability of the installation Installed on false ceiling or false floor Connect to the patch panel or the floor cabinet Conform to standards UTE C 15-900, NF C 15-100, NF C 20-730, EN 50-174.2, CEI 60950, ISO/IEC 11801 Ed. 2.0, EN 50173-2 and TIA/EIA 568 Colour code and wiring schemes T 568 A and T 568 B Cords and cables: ISO 11801 Ed.2.0, EN 50173-1, TIA/EIA 568 Technical characteristics: - polycarbonate PC hood - polypropylene PP base - RAL 7035 - hold connector units in place in the box: 100 N - Cables anchored on support using Colring cable ties Self-assembly zone distribution box Used for fitting fibre optic accessory units
---	--------	--

1 335 20 Fibre optic accessory

1	335 20	Used for fitting fibre optic units (see p. 74) and the fibre coil in the zone distribution box
---	--------	--

1 786 16 Sockets with fibre optic feedthrough

1	786 16	Fitted with duplex feedthrough 2 inlets / 2 outlets Used for connecting 2 fibres (fitted with their connector) Supplied with protective caps Fitted with transparent marker holder 2 modules
---	--------	---

Socket with fibre optic feedthrough 2 x ST

Bayonet connection (STII compatible)



○ White

1 786 17 Socket with fibre optic feedthrough 2 x SC

Push-pull connection



○ White

1 786 18 Socket with fibre optic feedthrough 2 x LC

Push-pull connection



○ White

Legrand cabling system LCS² fibre optic Patch cords



326 01



326 07



326 16



326 13



Technical characteristics (p. 83)

Fitted with 2 connectors with ceramic ferrule at either end
Packed and tested singly (report supplied)
Zipcord LSZH sleeve

Pack Cat.Nos OS 1 (UPC) monomode optical cords

		Max. optical losses: 0.3 dB For OS1 9/125 µm monomode installations, OS 1 type Yellow sheaths
		SC/SC duplex cords
3	326 00	Length: 1 m
3	326 01	Length: 2 m
3	326 02	Length: 3 m
		SC/LC duplex cords
3	326 03	Length: 1 m
3	326 04	Length: 2 m
3	326 05	Length: 3 m
		LC/LC duplex cords
3	326 06	Length: 1 m
3	326 07	Length: 2 m
3	326 08	Length: 3 m

OM 3 (PC) multimode optical cords (50/125 µm)

		Suitable for 10 Gb Ethernet network Max. optical losses: 0.3 dB For 50/125 µm multimode installations, OM 3 type Purple sheaths
		SC/SC duplex cords
3	326 09	Length: 1 m
3	326 10	Length: 2 m
3	326 11	Length: 3 m
		SC/LC duplex cords
3	326 12	Length: 1 m
3	326 13	Length: 2 m
3	326 14	Length: 3 m
		LC/LC duplex cords
3	326 15	Length: 1 m
3	326 16	Length: 2 m
3	326 17	Length: 3 m

NEW

Legrand cabling system LCS² fibre optic Patch cords



Pack	Cat.Nos	OM 2 (UPC) multimode optical cords (50/125 µm)
		Max. optical losses: 0.3 dB For 50/125 µm multimode installations, OM 2 type Orange sheaths
3	330 80	ST/ST duplex cords Length: 1 m
3	330 81	Length: 2 m
3	330 82	Length: 3 m
3	330 69	SC/SC duplex cords Length: 1 m
3	330 70	Length: 2 m
3	330 71	Length: 3 m
3	330 72	ST/SC duplex cords Length: 2 m
3	330 73	Length: 3 m
3	330 61	LC/LC duplex cord Length: 2 m
3	330 75	SC/LC duplex cords Length: 1 m
3	330 63	Length: 2 m
3	330 76	Length: 3 m
3	330 65	LC/ST duplex cord Length: 2 m

		OM 1 (UPC) multimode optical cords (62.5/125 µm)
		Max. optical losses: 0.3 dB For 62.5/125 µm multimode installations, OM 1 type Orange sheaths
3	331 51	SC/SC duplex patch cords Length: 1 m
3	331 52	Length: 2 m
3	331 53	Length: 3 m
3	331 57	ST/SC duplex patch cords Length: 1 m
3	331 58	Length: 2 m
3	330 77	LC/SC duplex patch cords Length: 1 m
3	330 62	Length: 2 m
3	330 78	Length: 3 m



Customised fibre optics

customised solutions p. 78

Legrand cabling system LCS² fibre optic


Fast crimping with kit Cat.No 331 93

Types of connector


- ST connector: Helical shape
locked by "push and turn" bayonet type connector



- SC connector: Rectangular shape
"push-pull" latch type locking.
Suitable for a large number
of active devices
Recommended in the generic standards
ISO/IEC 11801 and EN 50173



- LC connector: Rectangular shape
tab locking
Half the size of a
conventional connector



The 6 essential steps for fast crimping


Step 1: Strip the fibre



Step 2: Cleave the fibre



Step 3: Inspect the fibre



Step 4: Insert the fibre



Step 5: Align the fibre



Step 6: Crimp the connector



Technical characteristics

- The kit is used for attaching the connectors to 900 µm fibre
- Average loss of a connection: 0.3 dB
- Ideal for high-speed systems: 10 Gb Ethernet supplied with 50/125 µm connector
- Operating temperature: from 0°C to 65°C

Advantages:

- High quality finish
- No polishing: connectors pre-polished in factory
- No Epoxy type glue required
- Easy connection
- No complex tools or consumables required: the termination is made in less than 3 minutes and is very cost-effective
- Practical, lightweight kit
- Both multimode and singlemode fibres can be crimped (50/125 µm and 62.5/125 µm)

Legrand cabling system LCS²

Mosaic™ mechanisms

audio and video sockets



787 71



787 72



787 74



787 73



787 70

Pack	Cat.Nos	DVI-I socket
1	White 787 71	Used to transmit High-Definition digital and analogue video streams between a source (computer) and a compatible receiver (plasma, LCD, video projector, etc.) DVI-I plug 2 modules

Pack	Cat.Nos	Female HD15 sockets
1	White 787 72	For streaming of analogue video between a source (computer) and compatible receiver (plasma, LCD, video projector, etc.) VGA, XGA, VXGA definition according to the computer graphic card Female HD15 sockets 1 module Connection by welded connection block
1	White 787 57	Alumin. 792 57 2 modules Connection by screw on connection block
1	White 787 74	Alumin. 792 54 Female HD15 socket + 3.5 mm Jack 2 modules Connection by screw on connection block
1	White 787 59	Alumin. 792 59 Female HD15 socket + 5 preconnected BNC sockets RGBHV VGA adaptor, female HD15 base to 5 female BNC sockets 75 Ω

Pack	Cat.Nos	Jack plugs 3.5 mm
1	White 787 64	3.5 mm jack connectors can be used to create audio/video links from a portable source Female 3.5 mm jack plug 1 module Connection by screw on connection block
1	White 787 73	Alumin. 792 64 Welded 3.5 mm jack socket 1 module Connection by welded connection block

Pack	Cat.Nos	HD15 amplifier kit + 3.5 mm Jack
1	White 787 70	Used to connect audio/video terminals at a distance of more than 20 m The video link is via an HD 15 connector (resolution up to UXGA) The stereo audio link via a 3.5 mm jack The kit comprises: - 1 x 4-module transmitter equipped with an HD15 connector and a 3.5 mm jack - 1 x 4-module receiver equipped with an HD15 connector and a 3.5 mm jack - 1 x 4-module power supply to be connected to the mains and then to the receiver or transmitter The link between the transmitter and receiver is via a network cable cat. 6 (Cat.Nos 327 56). Transmitter and receiver are supplied with an RJ 45 LCS² jack for tool-free connection

Pack	Cat.Nos	Other audio and video sockets
1	White 787 68	Alumin. 792 75 HDMI type A sockets 2-gang Used to transmit high-definition digital audio/video streams between a source (HD-DVD drive, computer, etc.) and a compatible receiver (plasma, LCD, etc.)
1	787 69	YUV socket 1 module. Provides the high definition analogue video link for a DVD, PC monitor, plasma screen, etc
1	787 52	Female 1 RCA socket 1 module. Provides the composite video link for any peripheral device such as a camera, DVD player, video recorder, etc
1	787 53	Female 2 RCA socket 1 module. Provides the video link for any peripheral device such as a camera, DVD player, video recorder, etc
1	787 54	792 54 Female 3 RCA socket 1 module. Provides the composite video and stereo audio link for any peripheral device such as a DVD player, camera, video recorder, videoconferencing, etc
1	787 58	Female BNC 75 socket 1-gang Provides the composite video link for any peripheral device such as a DVD drive, camera, video recorder, etc
1	787 63	S-Video socket (4-pin mini-DIN) 1-gang Provides the YC video link for any peripheral device such as a DVD drive, camera, video recorder, videoconferencing, etc

Pack	Cat.Nos	Cords
1	517 20	HDMI cord Length 10 m. Allows an HDMI plug to be connected to an audio/video terminal (plasma screen, DVD player, etc.) HDMI booster should be used if more than 10 m is required Cat.No 779 30
1	517 22	HD15 cord + 3.5 mm Jack Length 2 m For connecting an HD 15 video socket and a 3.5 mm audio jack to a terminal (PC, video projector)
1	779 30	HDMI booster Enables an HDMI link to be extended Consists of 2 female connectors, used in addition to an HDMI cord (for example cord Cat.No 517 20) Does not need an external power supply

Pack	Cat.Nos	Cables
1	327 80	HDMI cables Length 20 m For connecting HDMI sockets at a distance of up to 10 m
1	327 81	VGA cables Length 20 m For full pin connection of HD15 plugs

NEW

Legrand cabling system LCS² adapters



695 80



539 49



327 60



517 09

Pack	Cat.Nos	Weatherproof adaptors
		IP 55 - IK 07 Allow all functions to be adapted 2 Mosaic modules for IP 55 operation
10	695 80	Adapter with smoked flap
1	695 79	Adapter with smoked flap lockable by special tool
1	695 81	Adapter for RJ socket ensuring IP 44 waterproofness cable already connected
1	919 45	Locking tool (used for changing vandal-proof screws)
		Soliroc adapter Used for adapting all functions 2 Mosaic modules IK 10 - IP 55
1	778 80	Adapter with flap
1	778 81	Adapter without flap
5	539 49	Hypra adapter IP 55 adapter base

RJ plugs for round cables


		Contacts with gold coating 1.2 µm
50	517 01	RJ 11 4 contacts, width 9.65 mm
50	517 02	RJ 12 6 contacts, width 9.65 mm
50	517 03	RJ 45 cat. 5e 8 contacts, width 11.70 mm
50	517 04	9 contacts, width 11.70 mm
50	517 06	RJ 45 sleeves Black
50	517 07	White



Stripping tool


Slits the sheath and releases the conductors by rotation
For twisted pair cables
Does not damage the conductors

Stripper
For twisted pair and fibre optic cable




Crimping tool for RJ 45 plugs

Used for crimping plugs
RJ 4/6/8/9 contacts
Ratchet control of crimping mechanism. Able to cut and strip cables
Tool with 3 crimping points
High resistance steel material



Legrand cabling system LCS² audio and video sockets


Conference room

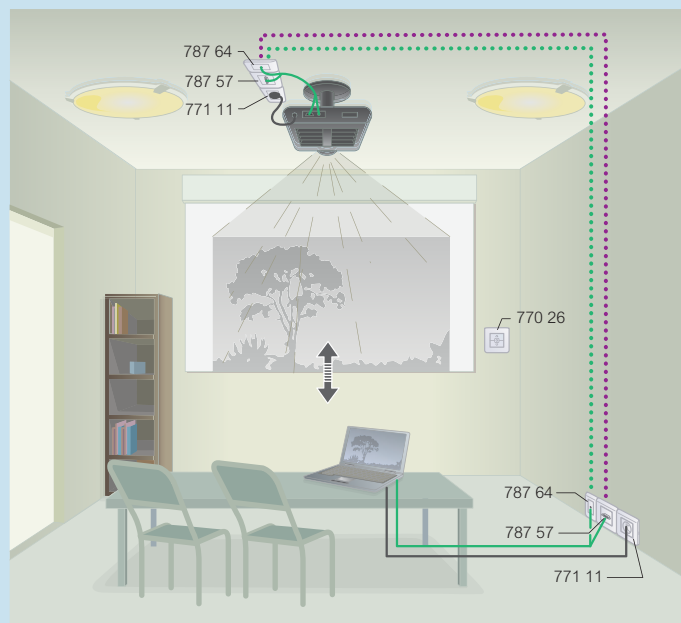

Video streaming with HD15 and/or DVI sockets
Audio streaming with Jack 3.5 sockets

Standard installation


XGA analogue quality video 1280 x 720 pixels

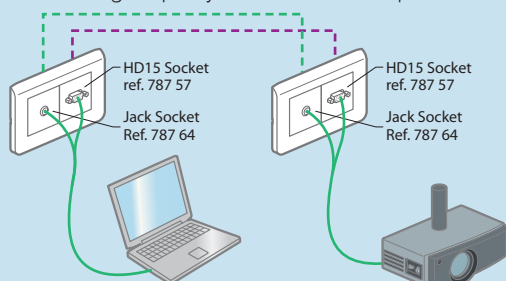

For management of existing PCs

High definition installation


HD digital quality video 1920 x 1080 pixels

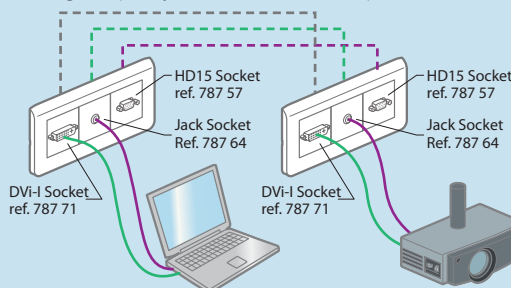

Add a DVI link cable to the standard installation for management of new PCs

customised 19" LCS2 cabinets and enclosures

19" LCS2 CABINETS

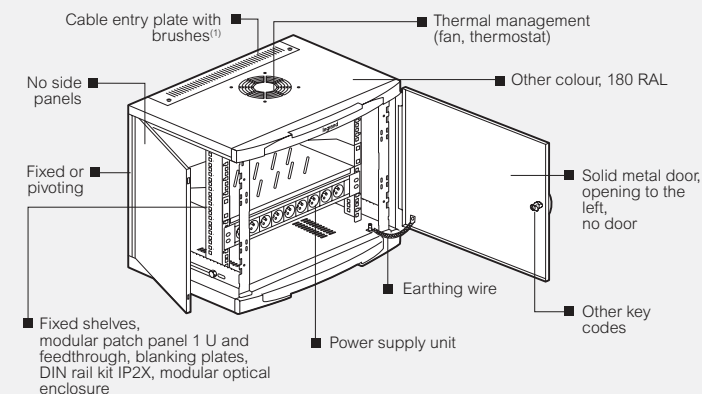


(1) Pivoting cabinets

19" LCS2 ENCLOSURES

30 SIZES

Capacity	24 U	29 U	33 U	42 U	47 U
Width	600 or 800 mm				
Depth	600, 800 or 1,000 mm				

ENCLOSURE DEFINITION

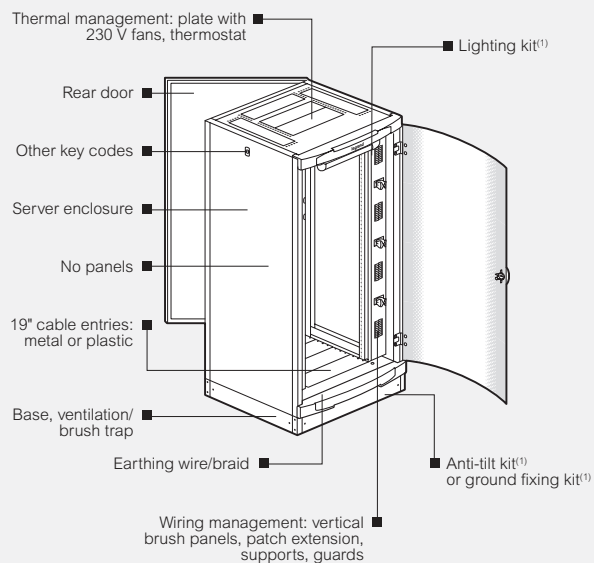

(1) Supplied ready for assembly

Option of solid or micro perforated metal doors, screen print glass doors, double doors or no door
Assembling 19" equipments

180 RAL colours available

OUR COMMITMENT

Quote within
24
hours

Request a quotation with the configurator under "Customised Solutions" at www.legrand.country




change
country

Legrand cabling system LCS² 19" LCS² server enclosures

NEW



463 85



Technical characteristics (p. 94)

IP 20 - IK 08

Enclosures with front and rear metal microperforated door (80%), reversibles, can be opened without key
Front door can be fitted with a DIN European cylinder (30 + 10 mm) with option of fitting a handle Cat.No 347 71/72 (see Legrand general catalogue)
Rear door can be fitted with a key barrel Cat.Nos 368 22/23/24/25/26/27 (see Legrand general catalogue)
Removable side panels
Levelling feet adjustable from the inside
Top cable entries in 19" cut-out format, capable of taking 19" plates with brushes, fans, etc.
Open bottom cable entries
Supplied with 4 x 19" uprights depth adjustment
Enclosures can be dismantled completely where access is difficult
Enclosures can be jointed with kit Cat.No 463 39
Supplied with earthing kit
Charcoal grey RAL 7016

Pack	Cat.Nos	Server enclosures				
		Capacity	Height (mm)	Width (mm)	Depth (mm)	Load capacity (kg)
1	463 85	42 U	2026	600	1000	630
1	463 86	42 U	2026	800	1000	630

Accessories

1	464 82	Set of 4 caster wheels Set of 4 caster wheels for server cabinet Load on the 4 wheels: 500 kg				
1	465 17	Shelves Screw-fixing on 4 x 19" uprights Fixed shelf depth 820 mm, max. load 100 kg For enclosure depth 1000 mm				
1	465 18	Telescopic shelf depth 820 mm, max. load 100 kg For server enclosures				
1	464 78	Cable trays Fast screw-free assembly of cable guides (p. 91) For width 600/800 mm				
1	464 79	Fitted between 2 supports Cat.No 464 79 For depth 1000 mm Pre-cut every 100 mm for height 500 to 200 mm				

20	347 95	Earth strip			
		Capacity (mm ²)	Fixing spacing (mm)	Ø of holes (mm)	
		6	200	8,5	

Bases, cable entry plates, thermal management, other accessories (p. 88)

19" equipment, cable management (p. 88)

NEW

Legrand cabling system LCS²

19" LCS² enclosures

enclosures and cabling units



463 18



463 34 + 1 enclosure 463 18
+ 1 extension enclosure 463 30



463 58 + additional 19" uprights Cat.No 463 73



Technical characteristics (p. 94)

IP 20 - IK 08 Enclosures with reversible curved front door made of screen-printed safety glass. Side and rear removable panels. Panels with automatic equipotential connection. Lock with 2433 A key for locking of the 4 sides. Levelling feet adjustable from the inside. Top and bottom cable entries, 19" cut-out format, receive 19" plates with brushes, fans, etc.

Supplied with 4 x 19" uprights with marking of the U and depth adjustment. Option of cable and patch cord management in cabling unit Cat.Nos 463 34/35. Enclosures can be dismantled completely where access is difficult. Enclosures can be linked with kit Cat.Nos 463 37/38/39 Charcoal grey RAL 7016

Pack	Cat.Nos	19" LCS ² enclosures				
		Capacity	Height (mm)	Width (mm)	Depth (mm)	Load capacity (kg)
1	463 00	24 U	1226	600	600	240
1	463 06	29 U	1448	600	600	290
1	463 12	33 U	1626	600	600	330
1	463 18	42 U	2026	600	600	420
1	463 19	42 U	2026	600	800	420
1	463 21	42 U	2026	800	600	420
1	463 22	42 U	2026	800	800	420
1	463 23	42 U	2026	800	1000	420
1	463 28	47 U	2248	800	800	470
1	463 29	47 U	2248	800	1000	470

19" LCS ² extension enclosures						
No side panels Supplied with joining kit						
		Capacity	Height (mm)	Width (mm)	Depth (mm)	Load capacity (kg)
1	463 30	42 U	2026	600	600	420
1	463 33	42 U	2026	800	800	420

LCS ² cabling units						
Can be attached between 2 LCS ² 42 U enclosures Easier cable and patch cord management Width 250 mm Supplied with earthing kit Charcoal grey RAL 7016 For enclosure depth (mm):						
1	463 34	600				
1	463 35	800				

LCS ² joining kits						
For linking 2 LCS ² enclosures For enclosure depth (mm):						
1	463 37	600				
1	463 38	800				
1	463 39	1000				

Legrand cabling system LCS²

Linkeo 19" LCS² enclosures

enclosures and cabling units



Technical characteristics (p. 94)

IP 20 - IK 08 Enclosures with reversible front door made of screen-printed safety glass. Removable side and rear panels. Panels with automatic equipotential connection 2433 A key for locking of the 4 sides

Levelling feet adjustable from the inside
2 top and bottom cable inlets, 19" cut-out format, receive 19" plates with brushes, fans, etc.

Supplied with 2 x 19" uprights with U marking and depth adjustment. Option of cable and patch cord management in cabling unit Cat.Nos 463 75/76

Enclosures can be dismantled completely where access is difficult

Enclosures can be linked with kit Cat.Nos 463 78/79

Grey RAL 7035

Pack	Cat.Nos	Linkeo 19" LCS ² enclosures				
		Capacity	Height (mm)	Width (mm)	Depth (mm)	Load capacity (kg)
1	463 52	33 U	1626	600	600	330
1	463 58	42 U	2026	600	600	420
1	463 59	42 U	2026	600	800	420
1	463 60	42 U	2026	800	600	420
1	463 61	42 U	2026	800	800	420


Linkeo 19" LCS ² extension enclosures						
No side panels Supplied with joining kit						
		Capacity	Height (mm)	Width (mm)	Depth (mm)	Load capacity (kg)
1	463 81	42 U	2026	600	600	420
1	463 84	42 U	2026	800	800	420

Linkeo LCS ² cabling units						
Can be attached between 2 Linkeo LCS ² 42 U enclosures Easier cable and patch cord management Width 250 mm Supplied with earthing kit Grey RAL 7035 For enclosure depth (mm):						
1	463 75	600				
1	463 76	800				

Linkeo LCS ² joining kits						
For linking 2 Linkeo LCS ² enclosures For enclosure depth (mm):						
1	463 78	600				
1	463 79	800				

Linkeo 19" LCS ² uprights						
Set of 2 additional 19" uprights						
1	463 72	33 U				
1	463 73	42 U				

Legrand cabling system LCS² enclosure plinths



Cross bar 476 93
with cable guide



464 61



464 63



Kit 464 52 consisting of 4 corner blocks
and solid traps at front/rear



464 66



Technical characteristics (p. 95)

Pack	Cat.Nos	Enclosure plinths
		Open on 4 sides Charcoal grey RAL 7016
		Plinth kits Consisting of 4 corner blocks and plain traps at front / rear Side traps to be ordered separately For enclosure width (mm):
1	Height 100 464 50	600
1	Height 200 464 52	800
	464 51 464 53	
		Sets of 2 plain side traps Traps height 100 mm Order 2 sets for a plinth height of 200 mm (Cat.Nos 464 52/53) For enclosure depth (mm):
1	464 54	600
1	464 56	800
1	464 58	1000
		Ventilated traps 1 trap height 100 mm For enclosure width/depth (mm):
1	464 60	600
1	464 61	800
		Traps with brush 1 trap height 100 mm For enclosure width/depth (mm):
1	464 62	600
1	464 63	800
		Plinth for cabling units
1	464 64	Assembled at front and/or rear between the bases of associated enclosures Trap height 100 mm. Double the number of traps for a height of 200 mm Charcoal grey RAL 7016
		Cross bar
		Fixed between 2 corner blocks of the plinth For fixing cable trays crossing 2 associated cabinets For enclosure depth (mm):
1	476 93	600
1	476 94	800
1	476 95	1000
		Linking interface
1	464 66	Protection allowing enclosure base and cable duct to be linked Supplied with weatherproof brush Reversible cover with cut-outs ensuring a high-quality finish Height 200 mm Charcoal grey RAL 7016 For enclosure depth 600 mm

Legrand cabling system LCS² cable entries and thermal management for enclosures



465 29



465 32







465 38




Technical characteristics (p. 95)

Pack	Cat.Nos	19" cable entry plates
		19" cable entry plates for enclosures Black RAL 9005
		Plastic with brushes, direct clipping
1	465 28	1 U
1	465 29	2 U
		Solid plastic, direct clipping
1	465 32	1 U
1	465 33	2 U
		Metal with brushes, quick-fixing
1	465 30	1 U
1	465 31	2 U
		Solid metal, quick-fixing
1	465 38	1 U
1	465 39	2 U
1	465 40	3 U
		Thermal management
		19" 3 U plates with fans Fixed to the enclosure 19" cable inlets or on 19" uprights 2 x 230 V~ fans 3 x 230 V~ fans
1	464 87	
1	464 88	
		1 U ventilation drawers For circulation of internal air Fit onto 2 x 19" uprights On/off switch
1	464 89	19" Ventilation shelf with 2 fans - depth 150 mm
1	464 90	19" Ventilation shelf with 4 fans - depth 300 mm
		Thermostat Adjustable from 5 to 60 °C, 230 V~, 50/60 Hz NO contact (10 A) and NC contact (5 A) Fixed by magnet
1	348 48	



NEW

Legrand cabling system LCS² accessories and document holders for enclosures



365 81



365 82

Pack	Cat.Nos	Accessories
1	464 83	Set of 4 caster wheels for LCS ² enclosure Maximum permissible load on the 4 casters: 380 kg
1	464 85	Lighting kit with switch Supplied with 230 V~ - 8 W fluorescent tube Fixing 19" - 1 U
1	464 84	Anti-tilt kit Stabilises the enclosure when extracting heavy products
1	464 86	Floor fixing kit Enable an enclosure to be fixed permanently into the ground



		Self-adhesive document holders				
		Open - RAL 7035		Int. dimensions		
		Ext. dimensions				
		Height (mm)	Width (mm)	Height (mm)	Width (mm)	Depth (mm)
20	365 80	235	340	200	310	18
20	365 81	165	260	130	230	18
Closed - RAL 7035						
1	365 82	Rigid, plastic, IP 50 Int. dimensions: 324 x 120 x 18 mm				
Transparent						
10	097 99	Soft plastic, A4 - 305 x 220 mm				



473 62 + 472 72 + 482 20

473 63 equipped



Technical characteristics (please refer to Legrand catalogue 2010)

Pack	Cat.Nos	19" 42 U Altis enclosures																																											
		Protection against dust, water, knocks in demanding environments - IP55 - IK10 For loads up to 720 kg on 4 uprights Reversible door 4-point locking with double bar (barrels: please refer to Legrand catalogue 2010) Removable rear panel Cable entries at bottom 19" uprights and side panels to be ordered separately Compatible with 19" LCS ² equipment (see p. 88) Cat.Nos 331 35 and 464 80 can be mounted in width 800 mm enclosures (see p. 91) Grey RAL 7035																																											
		Enclosures with framed glass door Coloured toughened glass																																											
		<table><tr><th colspan="3">Dimensions</th><th colspan="2">Window dim.</th><th rowspan="2">Weight (kg)</th></tr><tr><th>Height (mm)</th><th>Width (mm)</th><th>Depth (mm)</th><th>Height (mm)</th><th>Width (mm)</th></tr><tr><td>1</td><td>473 62</td><td>2000</td><td>600</td><td>600</td><td>1775</td><td>375</td><td>91.7</td></tr><tr><td>1</td><td>473 63</td><td>2000</td><td>800</td><td>600</td><td>1775</td><td>575</td><td>110.4</td></tr><tr><td>1</td><td>473 91</td><td>2000</td><td>600</td><td>800</td><td>1775</td><td>375</td><td>95.2</td></tr><tr><td>1</td><td>473 92</td><td>2000</td><td>800</td><td>800</td><td>1775</td><td>575</td><td>114.6</td></tr></table>	Dimensions			Window dim.		Weight (kg)	Height (mm)	Width (mm)	Depth (mm)	Height (mm)	Width (mm)	1	473 62	2000	600	600	1775	375	91.7	1	473 63	2000	800	600	1775	575	110.4	1	473 91	2000	600	800	1775	375	95.2	1	473 92	2000	800	800	1775	575	114.6
Dimensions			Window dim.		Weight (kg)																																								
Height (mm)	Width (mm)	Depth (mm)	Height (mm)	Width (mm)																																									
1	473 62	2000	600	600	1775	375	91.7																																						
1	473 63	2000	800	600	1775	575	110.4																																						
1	473 91	2000	600	800	1775	375	95.2																																						
1	473 92	2000	800	800	1775	575	114.6																																						
		Set of 2 side panels For enclosures																																											
		<table><tr><th>Height (mm)</th><th>Depth (mm)</th></tr><tr><td>1</td><td>472 72</td><td>2000</td><td>600</td></tr><tr><td>1</td><td>472 75</td><td>2000</td><td>800</td></tr></table>	Height (mm)	Depth (mm)	1	472 72	2000	600	1	472 75	2000	800																																	
Height (mm)	Depth (mm)																																												
1	472 72	2000	600																																										
1	472 75	2000	800																																										
		19" uprights Set of 2 42 U uprights (perforations 9.5 x 9.5 mm) Supplied with mounting lugs and screws Mounting in enclosures possible width 600 or 800 mm																																											
		Interior assembly kit - IP 55 for a 1000 kg/m³ load Set consisting of - 4 brackets - 2 joining feet - 1 gasket																																											
		M 14 lifting rings Set of 4 rings For a load of 1000 kg/m ³																																											

Plinths for Altis enclosures
(please refer to Legrand catalogue 2010)

Cable entry plates for Altis enclosures
(please refer to Legrand catalogue 2010)

Ventilation drawers (p. 88)


Legrand cabling system LCS²

19" LCS² equipment


for enclosures and Altis




Pack	Cat.Nos	Fixed shelves
		Black RAL 9005
		Quick fixing on 2 x 19" uprights
		Screw-free mounting (except server enclosures)
		Max. load 15 kg
		Height 2 U
1	465 00	Depth 115 mm
1	465 01	Depth 200 mm
1	465 02	Depth 360 mm
		Quick fixing on 4 x 19" uprights
		Fit exclusively on LCS ² enclosures (except server enclosures)
		Max. load 50 kg
1	465 05	Depth 450 mm
1	465 06	For enclosure depth 600 mm
1	465 07	Depth 650 mm
		For enclosure depth 800 mm
		Depth 850 mm
		For enclosure depth 1000 mm
		Screw-fixing on 4 x 19" uprights
		Fits on all enclosures
		Max. load 100 kg
1	465 17	Depth 820 mm
		For enclosure depth 1000 mm




		Telescopic shelves
		Black RAL 9005
		Quick fixing on 4 x 19" uprights
		Fit exclusively on LCS ² enclosures (except server enclosures)
		Max. load 50 kg
1	465 08	Depth 450 mm
1	465 09	For enclosure depth 600 mm
1	465 10	Depth 650 mm
		For enclosure depth 800 mm
		Depth 650 mm
		For enclosure depth 1000 mm
		Screw fixed on 4 x 19" uprights
		For server enclosures
		Max. load 100 kg
1	465 18	Depth 820 mm
		For enclosure depth 1000 mm





		Sliding rails
		Set of 2 fixed brackets
		Fit onto 4 x 19" uprights
		Max. load: 50 kg
1	465 11	For enclosure depth 600 mm
1	465 12	For enclosure depth 800 mm
1	465 13	For enclosure depth 1000 mm




		Keyboard shelf
1	465 19	Screw-fixing on 4 x 19" uprights
		For enclosure depth ≥ 800 mm
		Max. load 50 kg
		Accommodates:
		- a computer screen
		- a keypad on the retractable support
		- a mouse on a sliding shelf with integrated mat
		Area for mouse or CD. Black RAL 9005



Pack	Cat.Nos	230 V~ power supply units
		Reversible front, rear and side mounting on 19" uprights
		Connection by 2.5 mm² terminal block
		Provide a 2 U space
		Supplied with screws
		Socket units
		9 x 2P+E black sockets
		6 x 2P+E black sockets
1	465 50	6 x 2P+E white sockets with switch with indicator
1	465 54	6 x 2P+E white sockets + 16 A double-pole circuit breaker
1	332 88	6 x 2P+E tamperproof sockets for uninterruptible power supply (UPS)
1	332 37	19" power supply unit 9 sockets 2P+E Schuko, black
1	332 87	19" power supply unit 6 sockets 2P+E Schuko, black
1	465 60	Voltage surge protector unit
1	465 62	6 x white 2P+E sockets + surge protector and switch with indicator
		Maintains sockets energized after a mains overvoltage or lightning strike
		Interchangeable surge suppressor module
		Ensures continuity of service
		Replacement module for surge suppressor
1	775 41	For replacing the module after use
		Modular unit
1	332 79	Takes 16 Mosaic modules



		DIN rail kit IP 2X
1	465 45	For Lexic modular appliances
		Fits directly onto 19" uprights
		Capable of taking up to 7 x Mosaic 2P+E sockets at the rear
		Composed of:
		- metal box
		- 3 x DIN profile rails
		4 modules
		- terminal block for protection conductors
		- a 2 U faceplate
		- 3 blanking plates
		- 9 cable entry glands
		Height 2 U
		Black RAL 9005
		Compatible with EMC requirements


 10" LCS² cabinets

see p. 93

NEW

Legrand cabling system LCS² LCS² cable management



464 80



464 81



331 35



465 22



465 23





465 32






465 38

Pack	Cat.Nos	Enclosure cable and patch cord management
		Set of 3 cable management supports Fixing on structure Fast assembly of cable trays without screws
1	464 72	For enclosure width/depth 600 mm Fixing centre: 508 mm
1	464 73	For enclosure width/depth 800 mm Fixing centre: 708 mm
1	464 74	For enclosure depth 1000 mm Fixing centre: 908 mm
		Flat cable trays Fast mounting on the supports without screws. 250 mm width
1	464 76	For 33 U enclosures
1	464 77	For 42 U enclosures
		Cable trays For ducting cables can be fixed in plinth with Cat.Nos 476 93/94/95 on top of server cabinet with Cat.Nos 464 78/79
1	464 69	3000 x 200 x 54 mm
1	464 70	3000 x 400 x 54 mm
		Cable management grille For 42 U enclosures, width 800 mm Fits onto 19" uprights
1	331 35 ⁽¹⁾	Guard with articulated bolts Dimensions: 1560 x 100 x 150 mm
		Vertical cable manager For 42 U enclosures, width 800 mm Fits onto 19" uprights
1	464 80 ⁽¹⁾	Set of 2 vertical panels with brush feedthrough Supplied with 10 cable management rings Cat.No 465 42, 3 cable ties Cat.No 331 94, 3 cable ties Cat.No 331 95 and 3 cable ties Cat.No 331 96 Black RAL 9005
		Vertical extension For 42 U enclosures, width 800 mm Fits onto 19" uprights
1	464 81	Set of 2 vertical trim plates to increase the capacity with 12 U For installing 19" panels, DIN rail kit, power supply units, etc. Supplied with 8 cable management rings 2 U Cat.No 465 42 Black RAL 9005



Pack	Cat.Nos	19" management panels
		For organisation and circulation of patch cords Black RAL 9005
		Metal, 2 axes, quick-fixing Horizontal and front-to-back with round shaded plastic rings for optimum protection of patch cords (respecting the bending radius)
1	465 22	1 U
1	465 23	2 U
		Plastic with brushes, direct clipping
1	465 28	1 U
1	465 29	2 U
		Metal with brushes, quick-fixing
1	465 30	1 U
1	465 31	2 U
		19" blanking plates Black RAL 9005
		Solid plastic, direct clipping
1	465 32	1 U
1	465 33	2 U
		Solid metal, quick-fixing
1	465 38	1 U
1	465 39	2 U
1	465 40	3 U
		Cable management rings Direct clipping front structural uprights of fixed cabinets 9 U to 21 U (Cat.No 465 41 only) and central upright of cabinets depth 580 mm
4	465 41	1 U, plastic. Useable section 1890 mm ²
4	465 42	2 U, plastic. Useable section 4.070 mm ²
		Fixing accessories Set of 50 cage nuts, 50 plastic washers and 50 x M6 screws With 8.5 mm cage nuts With 9.5 mm cage nuts
1	364 53	
1	364 54	



Self-locking cable ties and tightening indicator (see Legrand catalogue)

	Customised 19" LCS ² enclosures
	Please consult Legrand

Legrand cabling system LCS²

19" LCS² cabinets and accessories



462 01



462 11



Pivoting cabinet 462 11



465 01



Technical characteristics (p. 98)

IP 20 - IK 08

With reversible curved print screen glass safety door

Pivoting side panels, tool-free removal from inside

Lock closure with key 2433 A

Supplied with 2 x 19" uprights with depth adjusting aid

Supplied with earthing kit

Top and bottom grilles for natural ventilation, capable of taking a fan in the high part

Charcoal grey RAL 7016

Pack	Cat.Nos	Wall-mounting 19" LCS ² cabinets			
		Easier cable management: ability to fix cable guide connecting rings Cat.Nos 465 41/42 (p. 91) and cable ties (see Legrand catalogue) DLP format cable entries at the top and bottom, bendable, with ability to attach cables using cable ties Rear pre-cut cable entries			
		Cabinet depth 400 mm			
		Capacity	Width (mm)	Height (mm)	Load capacity (kg)
1	462 00	6 U	600	350	18
1	462 01	9 U	600	500	27
1	462 02	12 U	600	600	36
1	462 03	16 U	600	800	48
		Cabinet depth 580 mm			
1	462 06	9 U	600	500	27
1	462 07	12 U	600	600	36
1	462 08	16 U	600	800	48
1	462 09	21 U	600	1000	63

Pack	Cat.Nos	Pivoting 19" LCS ² cabinets			
		Cabinets composed of: - base (wall-fixing) - pivoting body allowing free access to the rear of the cabinet to facilitate installation and maintenance Reversible pivoting direction Full cable entry plate at top and bottom, a brush plate can be fitted Cat.No 462 55			
		Cabinet depth 600 mm			
		Capacity	Width (mm)	Height (mm)	Load capacity (kg)
1	462 11	9 U	600	500	27
1	462 12	12 U	600	600	36
1	462 13	16 U	600	800	48
1	462 14	21 U	600	1000	63

Pack	Cat.Nos	Fixed shelves	
		Quick fixing without screws Max. load 15 kg Black RAL 9005	
1	465 00	Quick fixing on 2 x 19" uprights Depth 115 mm	
1	465 01	For cabinets depth 400, 580 and 600 mm	
1	465 02	Depth 200 mm For cabinets depth 400, 580 and 600 mm	
		Thermal management	
		Fan 2.5 m power supply cable	
1	462 60	230 V~ fan	
		Thermostat	
1	348 48	Adjustable from 5 to 60 °C, 230 V~, 50/60 Hz NO contact (10A) and NC contact (5 A) Fixed by magnet	
		Cable entry	
1	462 55	Cable entry plate with brush For pivoting cabinets	
		Accessories	
1	462 64	Set of 4 caster wheels for assembly on pivoting cabinets Total load permissible on the 4 casters: 120 kg	

19" LCS² power supply units (see p. 90)



19" management panels

see p. 91

NEW

Legrand cabling system LCS² Linkeo 19" LCS² cabinets

Legrand cabling system LCS² 10" LCS² cabinet for small business



462 42



462 70

Compatible with
19" LCS² cabinet
equipment



462 20



335 92



462 23



462 24

IP 20 - IK 08

Wall-mounting cabinets with reversible flat glass safety door with integrated lock

Supplied with 2 x 19" uprights adjustable in depth

Cable entry at top adjustable with foam seal

Rear and bottom cable entries equipped with blanking plates

High grilles for natural ventilation capable of taking the fan kit

Cat.No 462 70

Supplied with earthing kit

Cabinets compatible with 19" LCS² cabinet equipment

(except cable management rings)

Grey RAL 7035





Technical characteristics (p. 98)

Pack	Cat.Nos	Linkeo 19" LCS ² wall-mounting cabinets					
		Capacity	Height (mm)	Width (mm)	Depth (mm)	Net weight (kg)	Load capacity (kg)
1	462 30	6 U	367	600	400	18	18
1	462 31	9 U	500	600	400	20	27
1	462 42	12 U	625	600	600	30	36
1	462 43	16 U	810	600	600	36	48

Pack	Cat.Nos	Linkeo LCS ² fan kit
1	462 70	Kit contains: - 2 fans - 1 thermostat - ON/OFF switch Supplied with 2.3 m cable Power supply 230 V~ - 50/60 Hz

Pack	Cat.Nos	10" LCS ² cabinet			
		300 mm depth cabinet			
		Compact cabinet suitable for small business applications up to 36 RJ 45 sockets IP 20 – IK 08			
		Equipped with:			
		-1 reservible curved door made of safety glass			
		-2 side panels removable from inside			
		-key locking No 2433A			
		-2 depth-adjustable uprights			
		-top and bottom cable entries to DLP trunking system format			
		-pre-cut back cable entries			
		-top and bottom perforations for natural ventilation			
		Charcoal grey RAL 7016			
1	462 20	Capacity 6 U	Width (mm) 314	Height (mm) 352	Load capacity (kg) 12
1	335 92	10" equipment			
		Modular empty panel			
		10" panel - 1 U			
		For up to 2 connector units or 2 fibre optic units (p. 84)			
1	462 23	Fixed shelf 1 U			
		Depth 120 mm			
		max. load. 10 kg			
1	462 24	230 Vac power supply units			
		4 x 2P+E sockets			
1	462 25	To be equipped with Mosaic 2P+E sockets			
		Capacity: 8 modules			
1	462 26	4 x 2P+E Schuko sockets, black			



Legrand cabling system LCS²

19" LCS² enclosures and server enclosures

General characteristics

Metallic extendable enclosures. RAL 7016 textured polyester coating providing excellent resistance to corrosion and scratching
Front glass safety door, front and rear microperforated metal doors for server enclosures
Protection index (weatherproof) against solid objects and liquids: IP 20. Protection index against mechanical shocks: IK 08
Perforations in 19" uprights: 9.5 x 9.5 mm. Permissible load: 10 kg/U (or 420 kg for a 42 U enclosure), 15 kg/U for server enclosure

Compliance with standards


LCS² enclosures comply with the following standards:

IEC 60529 EN 60529	(NF C 20-010) Degrees of protection provided by enclosures (IP code)
IEC 62262 EN 62262	(NF EN 50102, NF C 20-015) Degree of protection provided by enclosures of electrical equipment against external mechanical impacts (IK code)
IEC 60950-1 EN 60950-1 C 77-210-1	Safety of data processing equipment
EIA-310-D	Cabinets, enclosures, panels and associated equipment (ANSI/EIA-310-D-1992)
IEC 60297-1 and 2 DIN 41414-7	(NF C 20-150, NF C 20-151) Sizes of mechanical structures of the 482.6 mm (19 in) series
IEC 60917-1 EN 60917-1	Modular order for the development of mechanical structures for electronic infrastructures
IEC 60917-2-1 EN 60917-2-1	Modular order for the development of mechanical structures for electronic infrastructures Coordination dimensions for infrastructure interfaces in widths of 25 mm (enclosure and frame dimensions)

LCS² enclosures can be integrated into installations complying with the following standards:

EN 50173-1	Information technology - Generic cabling systems
EN 50174-1 & 2 C 90-480-1 & 2	Information technology - Cabling installation
ISO IEC 11801	Information technology - Generic cabling for customer premises
NF C 15-100 Part 4-41	Low voltage electrical installations - Recommendations

Overall dimensions (mm)




Cat.Nos	Capacity	H ⁽¹⁾	L	D	A	B
463 00	24 U	1226	610	659	1138	1208
463 06	29 U	1448				
463 12	33 U	1626				
463 18/30	42 U	2026		859		1408
463 19			657			
463 21			857	1525	1608	
463 22/33			1057		1808	
463 23	857	1608				
463 28	47 U	2248	810	1057	1808	
463 29				1057		

Server enclosures

Cat.Nos	Capacity	H ⁽¹⁾	L	D	A	B
463 85	42 U	2026	610	1092	1138	1608
463 86	42 U	2026	810	1092	1525	1808

Useable dimensions

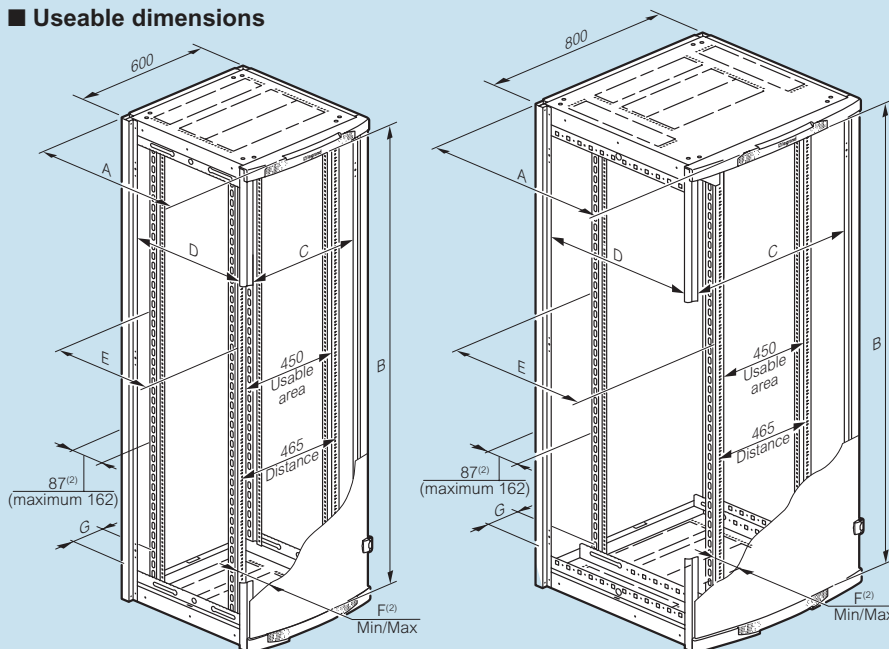

Cat.Nos	Capacity	A	Usable area			E	F ⁽²⁾		G
			B	C	D		Min.	Max.	
463 00	24 U	659	1086	490	490	425	118	193	41
463 06	29 U		1308						
463 12	33 U		1486						
463 18/30	42 U	1886	690	825	122	197	141		
463 19									
463 21									
463 22/33									
463 23	47 U	2108	890	825	122	197	141		
463 28									
463 29									

Server enclosures

Cat.Nos	Capacity	A	Usable area			E	F ⁽²⁾		G
			B	C	D		Min.	Max.	
463 85	42 U	1092	1886	490	890	825	122	197	41
463 86	42 U	1092	1886	690	890	825	122	197	141

(1) Without adjustment levelling feet (+15 to 45 mm with feet)
(2) Continuous adjustment with adjustments in widths of 12.5 mm

Legrand cabling system **LCS²**

19" **LCS²** enclosures, server enclosures and accessories

■ LCS² cable entries (mm)

Pre-cut at the top and bottom in 19" format (useable area 451 mm)

	Width 600	Width 800
Depth 600		
Depth 800		
Depth 1000	-	

■ LCS² server enclosure cable entries (mm)

Pre-cut at the top in 19" format (useable area 451 mm)
Bottom central cut (805 x 450 mm)

	Top	Bottom
Width 600		
Width 800		

■ Weight enclosures (kg)

Weights shown correspond to net weight (without packaging)

Cat.Nos	Weight Enclosure	Weight Extension enclosure
463 00	69	-
463 06	77	-
463 12	84	-
463 18/30 (ext)	99	72
463 19	110	-
463 21	114	-
463 22/33 (ext)	127	90
463 23	151	-
463 28	138	-
463 29	163	-


■ Weight server enclosures (kg)

Weights shown correspond to net weight (without packaging)

Cat.Nos	Weight Enclosure
463 85	155
463 86	166

■ Enclosure bases (mm)



Base kit + side traps

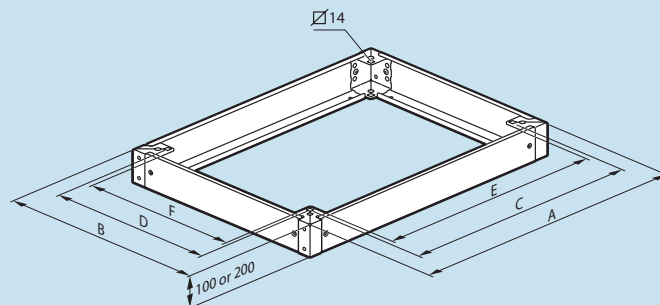

Enclosure dim. Width x Depth	Overall		Mounting		Usable area	
	A	B	C	D	E	F
600 x 600	599	599	478	478	449	449
600 x 800	599	799	478	678	449	649
800 x 600	799	599	678	478	649	449
800 x 800	799	799	678	678	649	649
600 x 1000	599	999	478	878	449	849
800 x 1000	799	999	678	878	649	849

■ Linking interface (mm)



Left or right assembly of an enclosure fitted with a 200 mm high base
Reversible interface cover

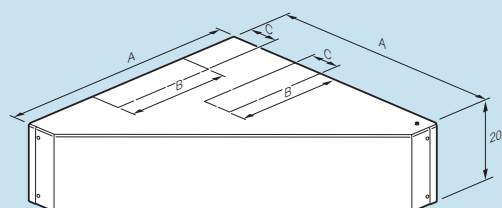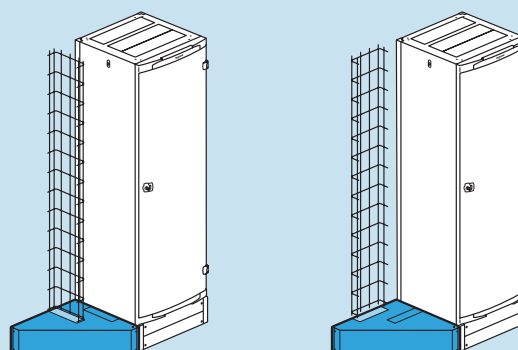

Enclosure dim. Depth	A	B	C
600	595	435	120


Legrand cabling system **LCS²** enclosure accessories **19" LCS²** (continued)

■ Supports for cable guides on server enclosures

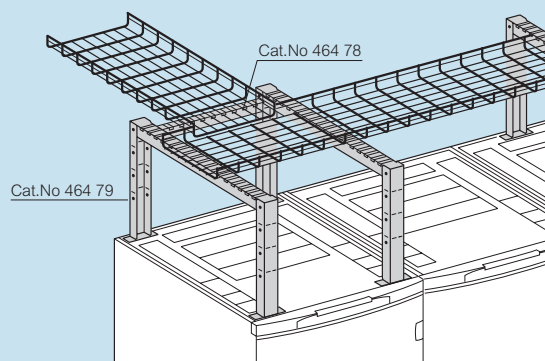


Cable guides can be installed quickly on the supports Cat.Nos 464 72/73/74/78/79

■ 19" plates with fans (mm)

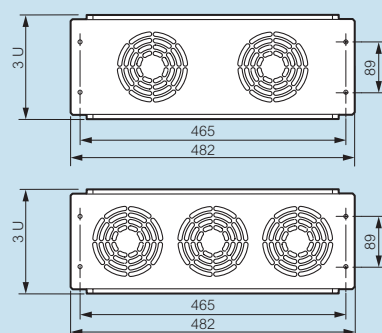

Cat.Nos	Ventilation zone		
	Number of fans	Section (cm ²)	Output (m ³ /h)
464 87	2	114	180
464 88	3	172	270


■ Shelves (mm)

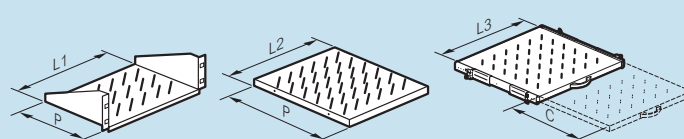

Cat.Nos	D	Useable width			C
		L1	L2	L3	
465 00	115	430			
462 23 ⁽¹⁾	120	216			
465 01	200	430			
465 02	360	430			
465 05	450		435		
465 06	650		435		
465 07	850		435		
465 08	450			425	320
465 09	650			425	420
465 10	650			425	420
465 17	820		425		
465 18	820			380	650

(1) Fixing centre 236.5 mm

■ Keyboard support shelf (mm)

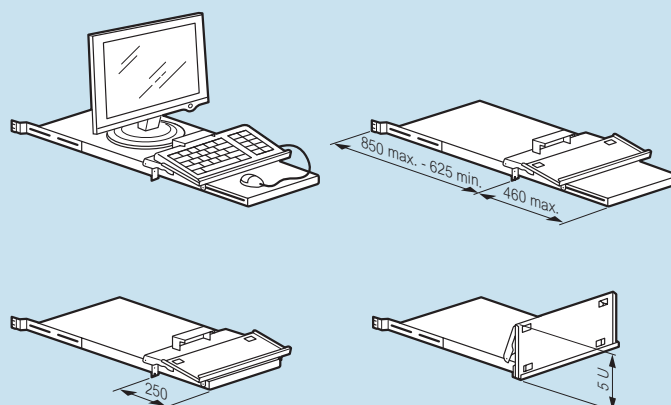


Legrand cabling system **LCS²** Linkeo 19" **LCS²** enclosures

■ General characteristics

Metallic extendable enclosures
RAL 7035 textured polyester coating providing excellent resistance to corrosion and scratching
Front glass safety door
Protection index (weatherproof) against solid objects and liquids: IP 20
Protection index against mechanical shocks: IK 08
Perforations in uprights: 9.5 x 9.5 mm
Permissible load: 10 kg/U (or 420 kg for a 42 U cabinet)

■ Compliance with standards: identical to 19" LCS² enclosures

■ Overall dimensions (mm)

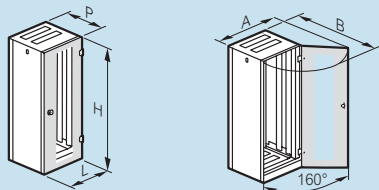

Cat.Nos	Capacity	H ⁽¹⁾	L	D	A	B
463 52	33 U	1626	610	635	1138	1208
463 58/81	42 U	2026		835		
463 59			810	635	1525	1408
463 60				835		
463 61/84						1608



(1) Without adjustment levelling feet (+17 to 50 mm with feet)

■ Cable entries (mm)

Pre-cut at the top and bottom in 19" format (useable area 451 mm)

	Width 600	Width 800
Depth 600		
Depth 800		

■ Useable dimensions (mm)

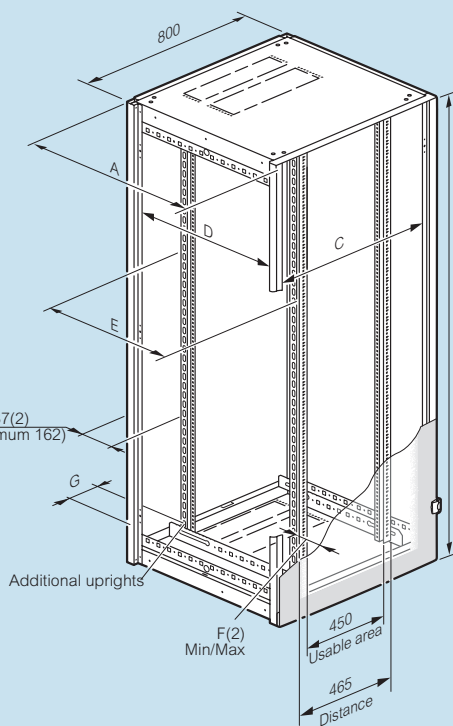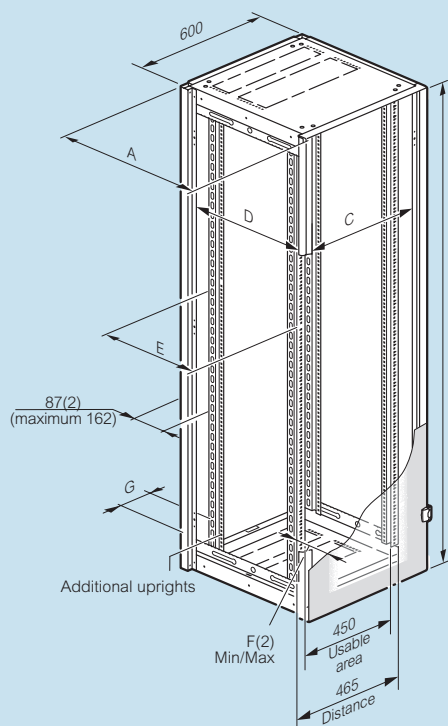

■ Weight (kg)

Weights shown correspond to net weight (without packaging)

Cat.Nos	Weight Enclosure	Weight Extension enclosure
463 52	82	-
463 58/81 (ext)	95	67
463 59	106	-
463 60	113	-
463 61/84 (ext)	126	92

Cat.Nos	Capacity	A ⁽¹⁾	Usable area			E	F ⁽²⁾		G
			B	C	D		Min.	Max.	
463 52	33 U	635	1486	490	490	425	94	169	41
463 58/81	42 U		1886		490	425			
463 59		835			690	625			141
463 60		635			490	425			
463 61/84		835		690	625				

(1) Overall dimensions

(2) Continuous adjustment with adjustments in widths of 12.5 mm

Legrand cabling system **LCS²** **LCS² 19" and 10" cabinets**

General characteristics

Metallic wall-mounting cabinets
RAL 7016 textured polyester coating providing excellent resistance to corrosion and scratching
Front safety glass door
Protection index (weatherproof) against solid objects and liquids: IP 20
Protection index against mechanical shocks: IK 08
Perforations in uprights : 9.5 x 9.5 mm
Permissible load: 3 kg/U (or 48 kg for a 19" cabinet 16 U)
12 kg for the 10" cabinet 6 U

Compliance with standards


LCS² cabinets comply with the following standards:

IEC 60529 EN 60529	(NF C 20-010) Degrees of protection provided by enclosures (IP code).
IEC 62262 EN 62262	(EN 50102, NF C 20-015) Degrees of protection provided by enclosures of electrical material against external mechanical impacts (IK code).
IEC 60950-1 EN 60950-1 C 77-210-1	Safety of data processing equipment.
EIA-310-D	Cabinets, enclosures, panels and associated equipment (ANSI / EIA / 310-D-1992).
IEC 60297-1 & 2 DIN 41414-7	(NF C 20-150, NF C 20-151) Sizes of mechanical structures of the 482.6 mm (19 in) series

LCS² cabinets can be integrated into installations complying with the following standards:


EN 50173-1	Information technology - Generic cabling systems.
EN 50174-1 & 2 C 90-480-1 & 2	Information technology - Cabling installation.
ISO IEC 11801	Information technology - Generic cabling for customer premises
NF C 15-100 Part 4-41	Low voltage electrical installations - Recommendations.
UTE C90-483	Residential cabling for communication networks

Overall dimensions (mm)




	Cat.Nos	Capacity	Height	Width	Depth
Fixed 19" cabinets	462 00	6 U	350	600	400
	462 01	9 U	500		
	462 02	12 U	600		
	462 03	16 U	800		
	462 06	9 U	500		580
	462 07	12 U	600		
	462 08	16 U	800		
	462 09	21 U	1000		
19" pivoting cabinets	462 11	9 U	500	600	600
	462 12	12 U	600		
	462 13	16 U	800		
	462 14	21 U	1000		
10" cabinet	462 20	6 U	352	314	300

Pivoting bottom opening

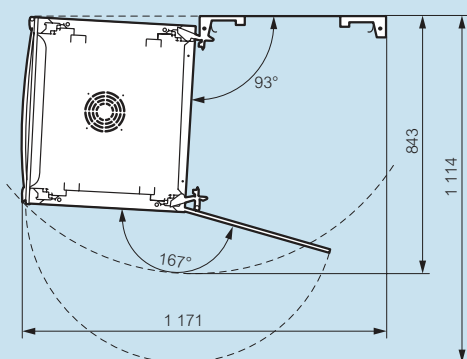


Front opening door and side panels

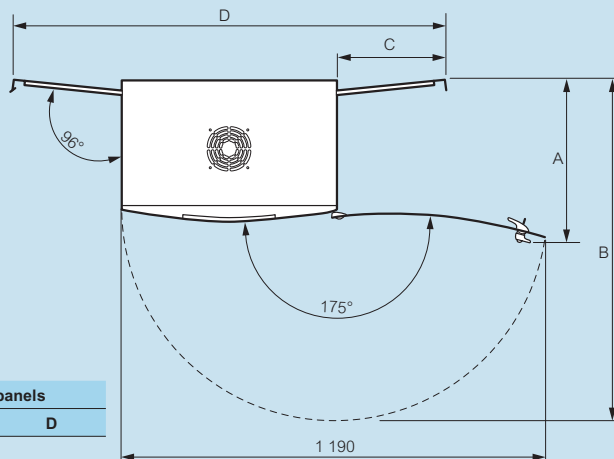


	Cat.Nos	Open doors		Open panels	
		A	B	C	D
Fixed 19" cabinets	462 00	400	962	305	1205
	462 01				
	462 02				
	462 03				
	462 06	580	1140	482.5	1565
	462 07				
	462 08				
	462 09				
19" pivoting cabinets	462 11	600	1179	482.5	1565
	462 12				
	462 13				
	462 14				

10" cabinet door opening Cat.No 462 20




■ Useable dimensions (mm)


Fixed 19" LCS² cabinets depth 400 mm

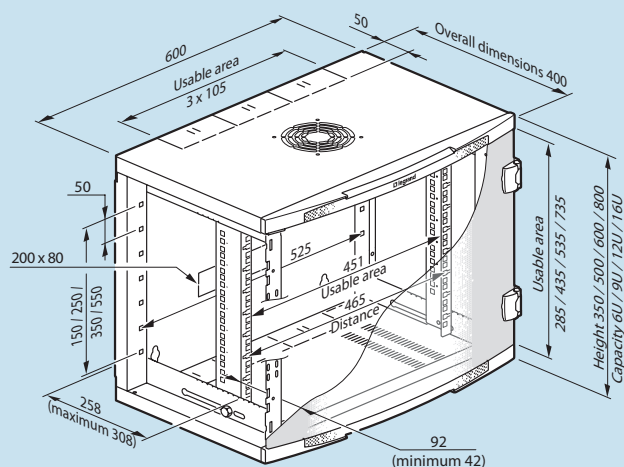


10" LCS² cabinet depth 300 mm

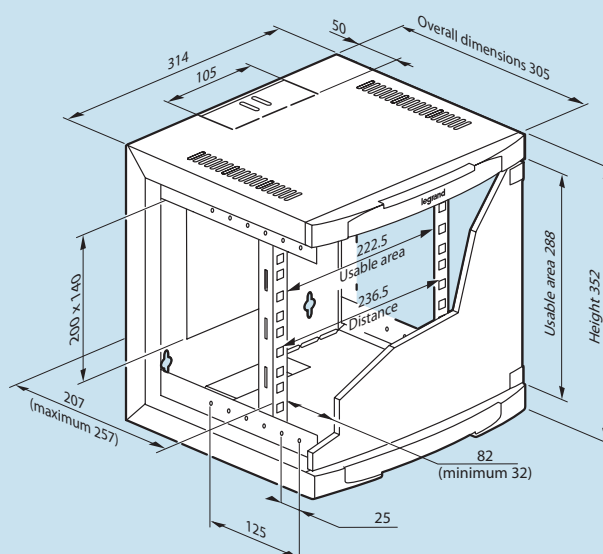


Fixed 19" LCS² cabinets depth 580 mm

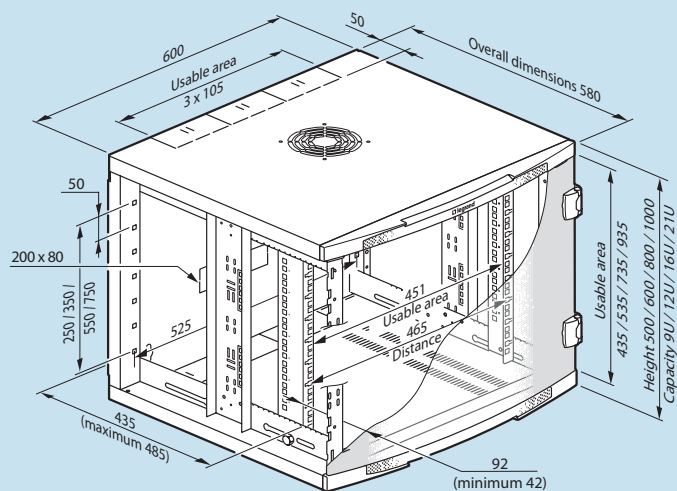

19" LCS² pivoting cabinets depth 600 mm

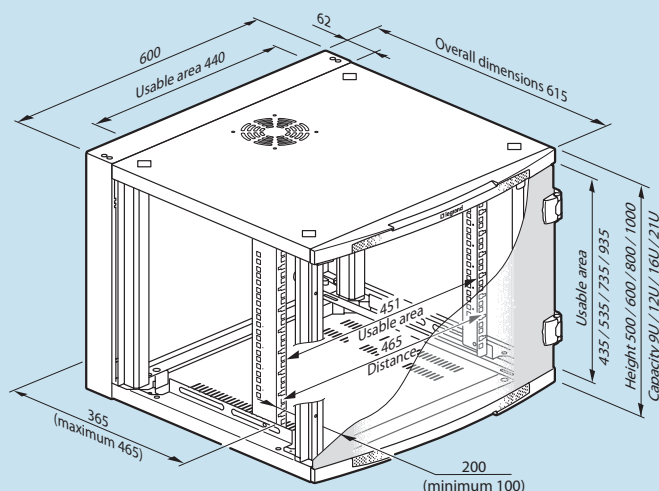

■ Fixing of cabinets (mm)

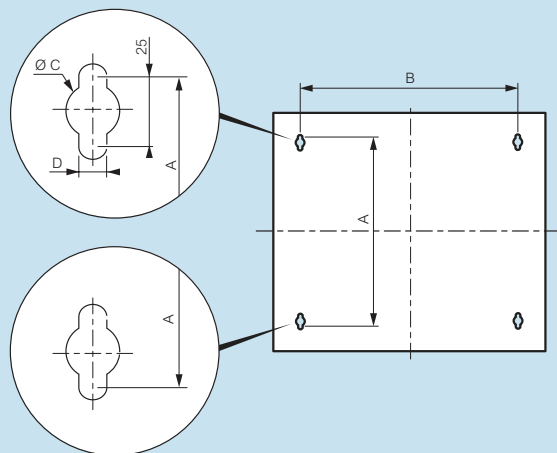

	Capacity	A	B	C	D
Fixed 19" cabinets	6 U	275	408	20	11
	9 U	425			
	12 U	525			
	16 U	725			
	21 U	925			
19" pivoting cabinets	9 U	425	500	18	9
	12 U	525			
	16 U	725			
	21 U	925			
10" cabinets	6 U	275	250	15	6.5

■ Weight (kg)

	Cat.Nos	Weight
Fixed 19" cabinets	462 00	16.7
	462 01	20.4
	462 02	22.8
	462 03	26
	462 06	25.7
	462 07	32.7
	462 08	41.5
	462 09	52.5
	462 11	31.8
19" pivoting cabinets	462 12	40
	462 13	47.3
	462 14	59
	462 20	8


Legrand cabling system **LCS²** **Linkeo fixed 19" LCS² cabinets**

■ General characteristics

Metallic wall cabinets
 RAL 7035 textured polyester coating providing excellent resistance to corrosion and scratching
 Glass safety door
 Protection index (weatherproof) against solid objects and liquids: IP 20
 Protection index against mechanical shocks: IK 08
 Perforations in uprights: 9.5 x 9.5 mm
 Permissible load: 3 kg/U (or 48 kg for a 19" cabinet 16 U)


■ Compliance with standards: identical to 19" LCS² cabinets

■ Overall dimensions (mm)




Cat.Nos	Capacity	Height	Width	Depth
462 30	6 U	367	600	400
462 31	9 U	500		
462 42	12 U	625		600
462 43	16 U	810		

■ Door opening (mm)

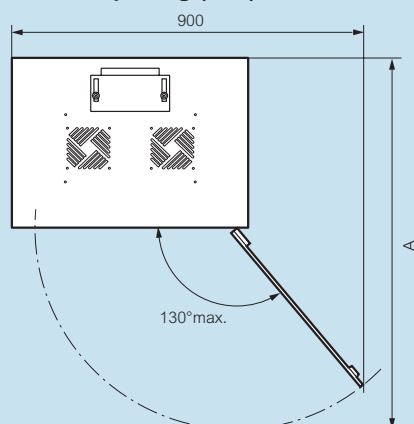


Cat.Nos	Capacity	A
462 30	6 U	930
462 31	9 U	
462 42	12 U	1130
462 43	16 U	

■ Fixing (mm)



Cat.Nos	Capacity	A	B
462 30	6 U	153	400
462 31	9 U	286	
462 42	12 U	419	
462 43	16 U	597	

■ Fan kit (mm)

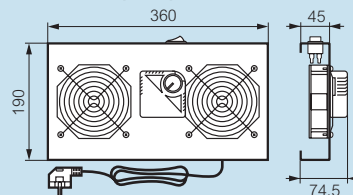

Cat.No	Ventilation zone		
	Number of fans	Cross-section (mm²)	Output (m³/h)
462 70	2	110	160

Legrand cabling system LCS²

Compliance of the LCS² systems with standards and certifications

LCS² systems and components (de-embedded) conform to the following standards:

- TIA/EIA 568C
- EN 50173-1 and EN 50173-2
- ISO/IEC 11801 version 2

The LCS² system supports 10G applications Base-T up to 100 m in a transmission channel. Conforms with standards ISO/IEC 24750, TIA TSB 155 and IEEE 802.3 an.

The Ea link class of the LCS² system also conforms with amendment 1 (04/2008) of standard ISO 11801 and its components conform with amendment 2.

LCS² systems are certified by expert independent laboratory 3P.




Main characteristics of the LCS² systems

	LCS ² 6A		LCS ² 6		LCS ² 5e
Frequency	500 Mhz		250 MHz		100 Mhz
Speed	10 Gbit/s		1 Gbit/s		1 Gbit/s
Wiring	Copper	FO	Copper	FO	Copper
Connectors	RJ 45	SC-LC...	RJ 45	SC-LC...	RJ 45
Length cable max.	100 m	variable	100 m	variable	100 m

New names for LAN cables (according to ISO 11801-2)

They correspond to: "type of cable shield"/ "type of twisted pair shield" TP monitoring (for twisted pairs)

Type of cable		Shield of the cable	Shield of pairs twisted
old name	new name		
SSTP	S/FTP	S: screen made up	F: screen formed a metal braid of a ribbon alumin/polyester
SFTP	SF/UTP	SF: combination of ribbon + braid	U: no screen
STP	U/FTP	U: no screen	F: screen formed of a ribbon alumin/polyester
FTP	F/UTP	F: screen formed of a ribbon alumin/polyester	U: no screen
UTP	U/UTP	U: no screen	U: no screen



Zone distribution boxes

Compliance with standards:

Zone distribution box: TIA/EIA 568
UTE C 15-900
NF C 15-100 - NF C 20-730
EN 50-174.2
ISO 11801
EN 50173
IEC 60950

Cords and cables: ISO 11801 id.2.0, EN 50173-1, TIA/EIA 568


General characteristics:

- 6 or 12 incoming ports (depending on Cat.No)
- RJ 45 wiring
- 4 to 8 or 12 outgoing ports (depending on Cat.No) maximum
- Connection of mixed cords via RJ 45 connector (RJ 45/stripped)
- UTP and FTP versions
- Cat. 5e and 6
- for computer applications; telephone, access control etc.

Technical characteristics:

- material: Polycarbonate PC hood
Polypropylene PP base
- colour: RAL 7035
- Weatherproofing protection index: IP 21
- Mechanical shock protection index: IK 07
- hold connector units in place in the box: 100 N
- Cables anchored on support using Colring cable ties

Dimensions



Performance


Maximum recommended lengths of links to ensure high performance of the systems with the use of RJ 45 sockets with copper feedthroughs and/or RJ 45 sockets

	Length Associated lengths (m)		
	Cords	Cables	Links
Cat. 6	8	70	78
	15	60	75
	20	55	75
Cat. 5e	8	75	83
	15	65	80
	20	60	80


We recommend selecting the shortest wiring lengths for more flexibility regarding cord length in the event of reconfiguration

Application example

A zone distribution box is installed to connect the RJ 45 sockets and meet the future requirements of the installation

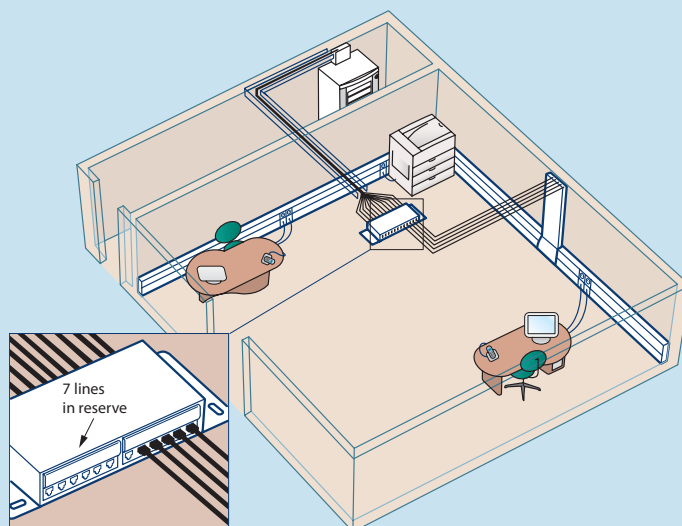

Connection to additional RJ 45 sockets is done by adding RJ 45 - RJ 45 cords between the unit and the RJ 45 sockets with copper feedthrough

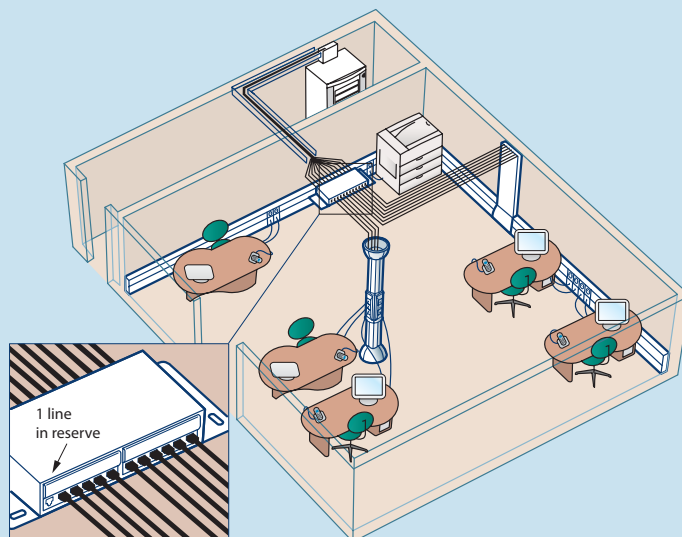

Legrand cabling system LCS² (continued)

■ Flush-mounting Ethernet 10/100 base T switches

	779 00	779 01	779 20
Power supply	230 V	PoE	230 V
Speed	100 Mbps		
Standards	802.3 / 802.3u	802.3u 802.3 af	802.3 / 802.3u
Common technical characteristics	• Operating temperature: from 0°C to +40°C • Max. humidity level permissible: 95 % • Auto MDI-X (takes crossed and straight cords) • Orange LED: - on: speed of 100 Mbps - off: speed 10 Mbps • Green LED on traffic		
Additional characteristics	• SNMP V2C (RFC 1901-1908) • Support MIB II (RFC 1213) • IP addressing via DHCP (according to RFC 2131) • Can be administered via WEB interface • Backup and updating of configuration files (Upload/download)		

■ Mosaic Wi-Fi access points

An 802.11 a and b/g solution

Radio communication standard	802.11 b/g	802.11 a
Power supply standard Power over Ethernet	802.3 af	
Frequency band	between 2.40 and 2.48 GHz	5 GHz
Number of available channels	13	8
Max. gross speed	54 Mbps	54 Mbps

■ Benefits of a Legrand Wi-Fi access point

- Possibility of simultaneous operation on 2 frequencies, a and b/g
- New products: invited access: used to allocate a network dedicated to visitors
- Provides a max. gross speed of up to 2 x 54 Mbps in simultaneous mode
- Very high security level: WPA2 encryption (802.11i) and authentication (802.1x)
- Possibility of roaming (moving from one access point to another without breaking the link)
- Quality of service (priority automatically given to voice, then video and finally data)
- Easy to configure and make secure: using the CD supplied with the access point


■ Installation

In all supports able to take a Mosaic mechanism (trunking, columns, flush-mounting boxes, floor boxes, etc.)
Do not place access points behind anything that could limit the antenna's range
Access points are connected tool-free via an RJ 45 connector


■ Sizing

- provide 1 access point for 1 localised requirement (in entrance hall)
- provide 1 access point per 100 m² for overall coverage and a maximum gross speed
- provide 1 access point with an RJ 45 socket for a desk used by visitors

■ Installation principle for a Wi-Fi access point with Power over Ethernet injector

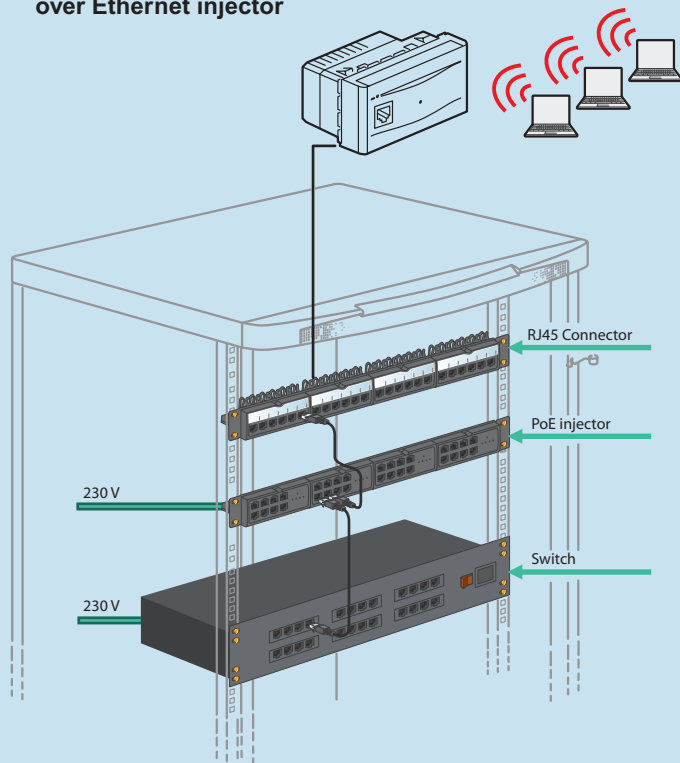


Particular case of the 1 port PoE: Clips directly onto a port on any patch panel
A single cord is necessary to connect it to a port on the switch

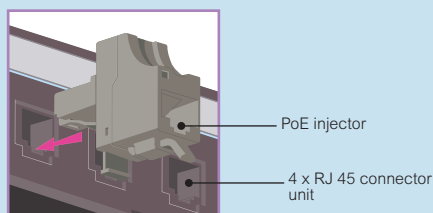

■ Operation of PoE injector

A PoE injector has one input and one output per access point to be supplied

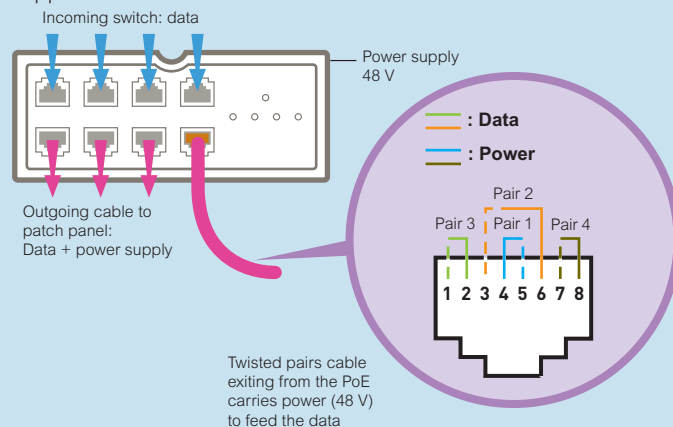

■ Legrand services

The Relations Pro⁽¹⁾ service will work with you and guide you in setting up your VDI sites:

- help with sizing the installation
- on-site assistance for integrating products and making important installations secure

Advisors are also available to answer all your technical questions

(1) 0810 48 48 48 (local call rate) Monday to Friday 0800 to 1800

Legrand cabling system **LCS²** **LCS² fibre optic**

■ Quick crimping with kit Cat.No 331 93

Types of connector


- ST connector: Helical shape
locked by "push and turn" bayonet
type connector



- SC connector: Rectangular shape
"push-pull" latch type
locking. Suitable for a large
number of active devices
Recommended in the generic standards
ISO/IEC 11801 and EN 50173



- LC connector: Rectangular shape
tab locking
Half the size of a conventional
connector



Technical characteristics

- the kit is used for attaching the connectors to 900 µm fibre
- average loss of a connection: 0.3 dB
- ideal for high-speed systems: 10 Gb Ethernet provided with 50/125 µm connector
- Operating temperature: from 0 °C to 65 °C

Advantages:

- high quality finish
- no polishing: connectors pre-polished in factory
- no Epoxy type glue required
- easy connection
- no complex tools or consumables required: the termination is made in less than 3 minutes, and is very cost-effective
- practical and light kit
- crimping possible of both multimode and monomode fibres

The 6 essential steps for quick crimping

Step 1: Strip the fibre



Step 2: Cleave the fibre



Step 3: Inspect the fibre



Step 4: Insert the fibre



Step 5: Align the fibre



Step 6: Crimp the connector




■ New optical classes ISO 11801 2nd Ed.

Parameters of the optical link (ISO 11801/EN 50173)


Parameter	Multimode		Monomode	
	850 nm	1 300 nm	1 310 nm	1 550 nm
Fibre attenuation dB/km	3.5 max.	1.5 max.	1.0	1.0
Bandwidth MHz.km	200 min.	500 min.	n/a	n/a
Connector attenuation dB	0.75 max.	0.75 max.	0.75 max.	0.75 max.
Return loss dB	20 min.	20 min.	26 min.	26 min.

■ Speed ensured by distance

ISO 11801-2 optic classes

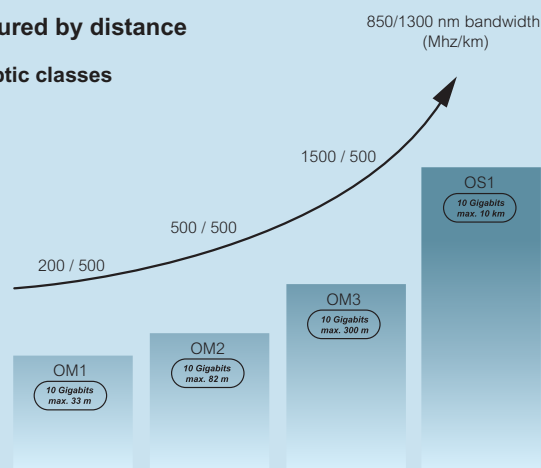

■ Typical layout of an optical link between 2 distribution blocks

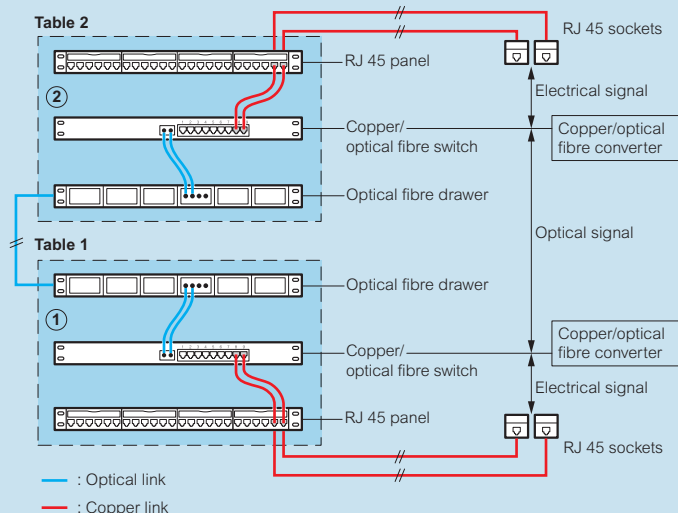

Protocols (length max.)	Multimode fibre			Monomode fibre
	OM 1	OM 2	OM 3	OS 1
10 Gb Ethernet (S/L base)	33 m	82 m	300 m	10 km
Ethernet Gb (LX base)	550 m	550 m	550 m	2 km
Ethernet Gb (SX base)	275 m	550 m	550 m	-
Fast Ethernet	2000 m	2000 m	2000 m	2 km
Ethernet 10 Mbps	2000 m	1514 m	1514 m	-
Desired perennity	> 10 years	10 to 15 years	> 15 years	> 15 years
Market trend	↘	↗↗	↗↗↗	↗

104

Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack	Cat.Nos	Page No	Pack
465 13	91	1	517 01	75	50	518 73	61	5	765 44	68	5	787 70	84	1	572 357	63	5
17	86	1	02	-	50	74	-	5	46	-	5	71	-	1	58	-	10
18	-	1	03	-	50	75	-	5	51	73	10	72	-	1	59	-	10
19	91	1	04	-	50	76	-	5	52	-	10	73	-	1	76	77	1
22	91	1	06	-	50	77	-	5	54	-	10	74	-	1	77	-	1
23	-	1	07	-	50	78	-	5	55	-	10				78	-	1
28	88	1	09	-	1	79	-	5	61	68	10	792 54	84	1			
29	-	1	20	84	1	80	-	5	62	-	10	57	-	1	572 802	69	10
30	-	1	22	-	1	81	-	5	63	-	10	64	-	1	03	73	10
31	-	1	40	74	10	82	61	5	64	-	10	75	-	1	04	-	10
32	-	1	41	-	10	83	-	5	65	-	10				06	63	10
33	-	1	52	65	5	84	-	5	66	-	10	794 33	68	1/10	14	69	10
38	-	1	53	-	5	85	-	5	71	63	10	51	73	10	15	73	10
39	-	1	54	-	5				73	-	10	52	-	10	16	69	10
40	-	1	55	-	5	533 00	75	3	74	-	10	54	-	10	17	-	10
41	91	4	57	66	4	01	-	3	76	-	10	55	-	10	22	-	10
42	-	4	58	-	4	02	-	3	81	68	10	61	68	10	23	-	10
45	91	1	59	-	4	03	-	3	82	-	10	62	-	10	24	-	10
50	-	1	62	65	1				83	-	5	64	-	10	30	72	10
54	-	1	63	-	1	539 49	75	5	90	63	5	65	-	10	31	67	10
60	-	1	64	-	1				91	68	10	71	63	10	32	72	10
62	-	1	65	-	5				92	-	10	73	-	10	33	67	10
			72	-	1				93	-	10	74	-	10	35	75	10
			73	-	1	673 44	69	10	94	-	5	76	-	10	36	-	10
472 72	90	1	74	-	1	45	-	10	95	-	5	92	68	10	39	69	1
75	-	1	75	-	1	46	63	10	96	-	5				50	63	5
			80	61	5	54	69	10	97	73	5				51	-	10
			81	-	5	55	-	10	99	63	5				52	-	10
473 62	90	1	82	-	5	66	77	1							53	69	5
63	-	1	83	-	5	96	69	10							54	-	10
91	-	1	90	72	4				775 41	91	1				55	-	10
92	-	1	91	-	4	695 56	73	1/20							57	63	5
			92	-	4	57	-	1/20	778 80	75	1	572 083	76	1	58	-	10
476 83	90	1	93	-	4	61	69	1/20	81	-	1	84	-	1	59	-	10
93	88	1	93	-	4	69	-	5/100	91	85	10	85	-	1	76	77	1
94	-	1	94	-	4	79	75	1							77	-	1
95	-	1	95	-	4	80	-	10	779 00	76	1	572 302	69	10	78	-	1
96	90	1	96	66	4	81	69	1	01	-	1	03	73	10	83	76	1
			97	-	1				13	77	1	04	-	10	84	-	1
			98	-	4				14	-	1	06	63	10	85	-	1
482 20	90	1							20	76	1	14	69	10			
									30	84	1	15	73	10			
			518 50	65	1	765 01	73	10				16	69	10			
			51	-	1	02	-	5				17	-	10			
			52	-	1	03	68	1	786 16	81	1	22	-	10	633 912	67	10
515 00	72	4	53	-	1	04	-	1	17	-	1	23	-	10	13	-	10
01	-	4	54	-	1	05	-	10	18	-	1	24	-	10	16	-	10
02	-	4	55	-	1	06	-	5	20	72	10	30	72	10	17	-	10
03	-	4	56	-	1	08	63	10	21	-	10	31	67	10	24	-	1
04	-	4	57	-	1	09	-	10	22	67	10	32	72	10	25	-	1
05	-	4	58	-	1	22	68	10	23	-	10	33	67	10	26	-	1
10	66	4	59	-	1	23	-	10	24	72	10	35	75	10	27	-	1
11	-	4	60	-	1	24	63	10	25	-	10	36	-	10	28	-	1
12	-	4	61	-	1	25	-	10	26	67	10	39	69	1	29	-	1
13	-	4	62	-	1	26	-	10	27	-	10	50	63	5	68	-	5
14	-	4	63	-	1	27	-	10				51	-	10	69	-	1
15	-	4	64	-	1	30	73	1	787 52	84	1	52	-	10	70	-	1
			65	-	1	32	68	1	53	-	1	53	69	5	71	-	1
516 36	71	1	66	61	5	33	-	1/10	54	-	1	54	-	10	72	-	1
37	-	1	67	-	5	35	75	10	57	-	1	55	-	10	73	-	1
38	-	1	68	-	5	36	-	10	58	-	1						
39	-	1	69	-	5	37	-	10	59	-	1						
40	-	1	70	-	5	38	-	10	63	-	1						
41	-	1	71	-	5	39	-	10	64	-	1						
42	-	1	72	-	5	41	73	5	68	-	1						
43	-	1	72	-	5	42	-	5	69	-	1						
												</					



**World Headquarters
and International Department
87045 LIMOGES CEDEX
FRANCE**

Tel. : + 33 5 55 06 87 87
Fax : + 33 5 55 06 74 55

www.legrandgroup.com