

# PRODUCT DATASHEET

## DULUX D LED EM & AC Mains 18 7 W/4000K G24d-2

OSRAM DULUX D LED EM & AC MAINS | LED replacement for CFLni, 2 tubes, with 2-pin G24d base for CCG and AC mains operation



### AREAS OF APPLICATION

- General illumination within ambient temperatures from - 20...+35 °C
- Supermarkets and department stores
- Walkways and corridors
- Hotels, restaurants
- Outdoor applications only in suitable luminaires

### PRODUCT BENEFITS

- Quick, simple and safe replacement without rewiring
- Low energy consumption
- Easy relamping thanks to compact design
- Operation directly on 230 V AC mains possible

### PRODUCT FEATURES

- LED replacement for conventional compact fluorescent lamps for use in CCG luminaires or on AC mains
- Type of protection: IP20
- Rotatable base around its longitudinal axis ( $\pm 90^\circ$ )
- Lifetime: up to 30,000 h
- Single-ended two-pin plug-in G24d base



## TECHNICAL DATA

### Electrical data

Rated wattage	7.00 W
Nominal wattage	7.00 W
Nominal voltage	220...240 V
Max. lamp no. on circuit break. 10 A (B)	70
Max. lamp no. on circuit break. B10 A - CCG without compensation	70
Max. lamp no. on circuit break. B10 A - CCG with compensation	70
Max. lamp no. on circuit break. B16 A - CCG without compensation	40
Max. lamp no. on circuit break. B16 A - CCG with compensation	40
Max. lamp no. on circuit break. 16 A (B)	40
Operating frequency	50/60 Hz
Inrush current	10.0 A
Power factor $\lambda$	> 0.50

### Photometrical data


Nominal luminous flux	700 lm
Rated luminous flux	700 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Cool White
Color temperature	4000 K
Luminous flux	700 lm
Color rendering index Ra	>80
Standard deviation of color matching	$\leq 6$ sdc <sub>m</sub>
Rated color temperature	4000 K
Color rendering index Ra	>80

### Light technical data

Warm-up time (60 %)	< 0.50 s
Beam angle	120 ° <sup>1)</sup>
Starting time	< 0.5 s

<sup>1)</sup> ZMP\_110132

## Dimensions & weight



<b>Overall length</b>	148.0 mm
<b>Diameter</b>	35.0 mm
<b>Outer bulb</b>	-
<b>Length</b>	148.0 mm

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+35 °C
<b>Maximum temperature at tc test point</b>	67 °C

## Lifespan

<b>Nominal lamp life time</b>	30000 h
<b>Rated lamp life time</b>	30000 h
<b>Number of switching cycles</b>	200000
<b>Lumen maintenance at end of service life</b>	0.70

## Additional product data

<b>Base (standard designation)</b>	G24d-2
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Design / version</b>	frosted
<b>Show WEEE picto</b>	Yes

## Capabilities

<b>Dimmable</b>	No
-----------------	----

## Certificates & standards



<b>Photobiological safety group EN62778</b>	RG1
<b>Energy efficiency class</b>	A+
<b>Energy consumption</b>	8 kWh/1000h

## Country-specific categorizations

Order reference

DULUX D18LED 7W

## Light Distribution

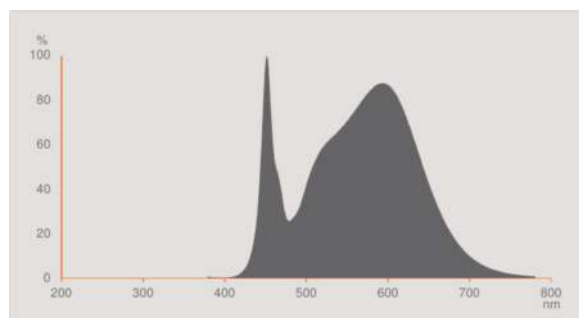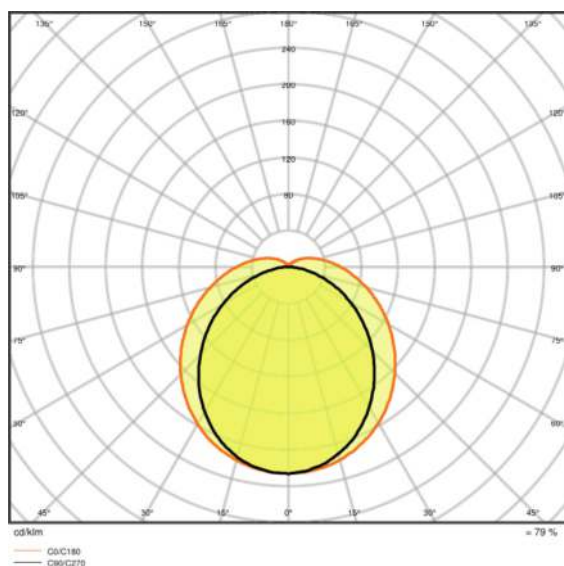

LDC typ polar

Spectral power distribution

## SAFETY ADVICE

Only suitable for temperatures of up to 35°C inside of the luminaire.  
 Not suitable for tandem operation.  
 Tc point is located below the LED module on the back side of the lamp.

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075024939	Folding carton box 1	37 mm x 37 mm x 151 mm	78.00 g	0.21 dm <sup>3</sup>
4058075024946	Shipping carton box 10	193 mm x 82 mm x 165 mm	831.00 g	2.61 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.