


3-phase busbars Modular spacing 45 mm for 2 switches Fork shape connections



General technical data		
size of the circuit-breaker		S00, S0
suitability for use		circuit-breakers 3RV2
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
Installation/ mounting/ dimensions		
operational current rated value	A	63
number of poles for main current circuit		3
type of electrical connection for main current circuit		screw-type terminals
Certificates/ approvals		
General Product Approval		Declaration of Conformity

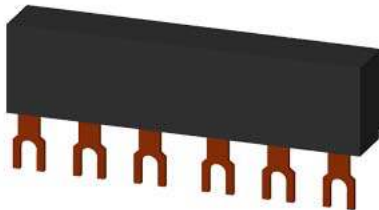

[Confirmation](#)




[UK Declaration of Conformity](#)



Test Certificates	Marine / Shipping
Type Test Certificates/Test Report    	

Marine / Shipping	other
 	Confirmation 

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1915-1AB Cax online generator

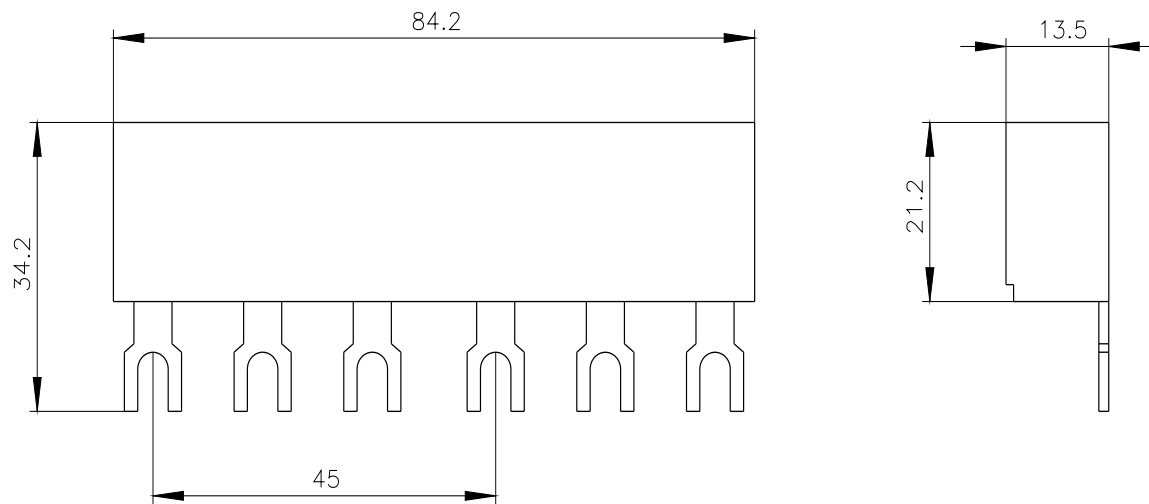

last modified:

2/9/2022 