



Simx Lighting prides itself on selecting only top quality products with reliable components and workmanship. Unique and often ground breaking features with real user benefits are high priorities in our selection process.

A key part of our process is in working directly with carefully selected manufacturers to design product that best suit New Zealand conditions. Whether that is by improving raw material selection, functionality, or changes to facilitate easier installation, we ready our products and look for ongoing improvements to ensure your experience with Simx Lighting is a positive one.

To this end, we have taken New Zealand's unique geography as inspiration for architectural design themes using our natural landscapes and colour tones as the basis for a set of new products which complement each other as well as modern New Zealand home design.



Esylux a German-based innovator and manufacturer of intelligent automation and lighting solutions - a welcome addition to the Simx Ltd product offering.

In light of the often complex requirements, close attention is given to the simple operation of our product solutions. Together with ensuring the highest standards in quality, design, convenience and service are met, Esylux products are always delivering new, surprisingly easy solutions for the perfect synergy between automation and lighting in any space.

# WALL LIGHTS LIGHTING PEOPLE AND SPACES











HAWEA WAKATIPU WANAKA







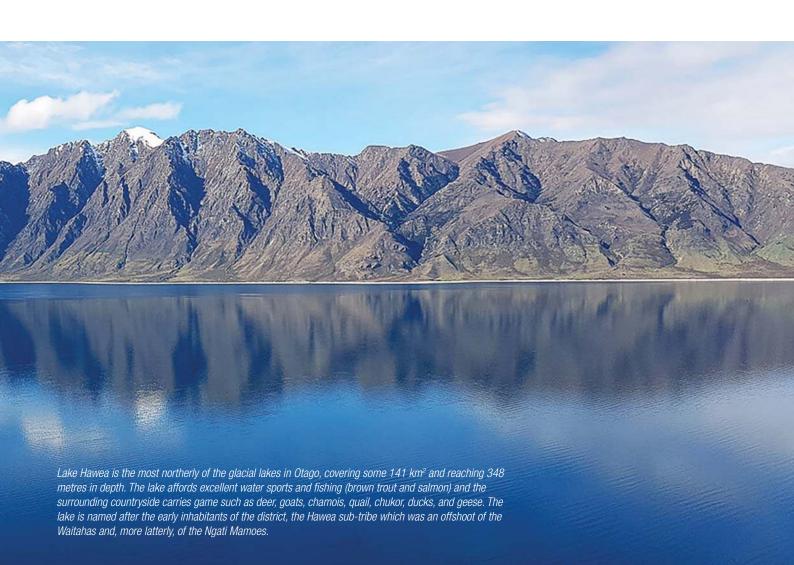

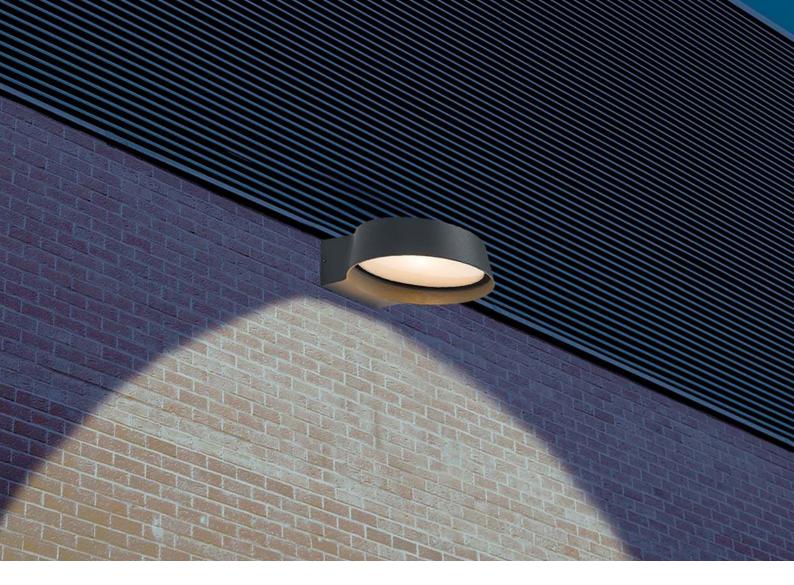




## **TEKAPO**

- 0% upward light
- Suitable for both commercial and residential use
- Warm white output for reduced sky glow
   Powder-coated cast alloy, tempered glass

Product Code	Black		LHT1113
	White		LHT1114
LED Colour			3000K
Luminous Flux			900 lm
IP Rating			IP54
Dimensions	162mm (A)	192mm (B)	60mm (C)






## **PUKAKI**

- Modern design for modern decor
- All weather construction
- Use over doorways and access areas
- Powder-coated cast alloy, UV-stabilised polycarbonate

#### 10W

Duadwat Oada	Anthracite		LHT1111
Product Code	White		LHT1112
LED Colour			3000K
Luminous Flux			460 lm
IP Rating			IP65
Dimensions	125mm (A)	50mm (B)	137mm (C)



## **HAWEA**


- Extra heavy duty construction
- Up/down light output
- Residential and commercial use
- Powder-coated cast alloy, UV-stabilised polycarbonate

#### 7W

Product Code	Anthracite		LHT1119
	White		LHT1120
LED Colour			3000K
Luminous Flux			170 lm
IP Rating			IP65
Dimensions	175mm (A)	64 mm (B)	83mm (C)

#### 13W

Product Code	Anthracite		LHT1121
Product Gode	White		LHT1122
LED Colour			3000K
Luminous Flux			600 lm
IP Rating			IP65
Dimensions	248mm (A)	70mm (B)	115mm (C)
			1





## **WAKATIPU**

- Popular European styling Angled face for wider coverage
- Patios and pathways in commercial and residential spaces
- Powder-coated cast alloy, UV-stabilised polycarbonate

### 7W


Product Code	Anthracite		LHT1115
	White		LHT1116
LED Colour			3000K
Luminous Flux			235 lm
IP Rating			IP65
Dimensions	180mm (A)	114mm (B)	65mm (C)

Product Code	Anthracite		LHT1117
Product Gode	White		LHT1118
LED Colour			3000K
Luminous Flux			360 lm
IP Rating			IP65
Dimensions	250mm (A)	123mm (B)	74mm (C)







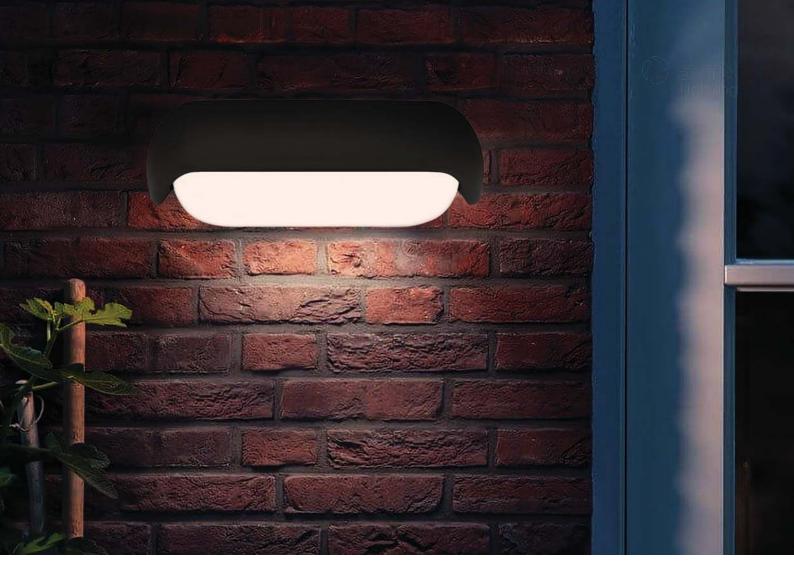




## **WANAKA**

- Sleek design creating exceptional styling
- Zero frame lens
- Soft warm white output for patios and balconies
  Powder-coated cast alloy, UV-stabilised polycarbonate

Product Code	Anthracite		LHT1109
Frounct Gode	White		LHT1110
LED Colour			3000K
Luminous Flux			690 lm
IP Rating			IP65
Dimensions	270mm (A)	58mm (B)	100mm (C)





## **UP/DOWN LIGHTS**



## **VERSATILE FACADE LIGHTING**









RUAPEHU

**TUTOKO** 

**TONGARIRO** 














## **RUAPEHU**

- Contemporary and robust design High quality optics 38°

- Low glare direct output
  Powder-coated cast alloy, tempered glass

### 2 x 6W

Product Code			LHT1131
LED Colour			3000K
Luminous Flux			950 lm
IP Rating			IP65
Dimensions	178mm (A)	94mm (B)	Ø 63mm (C)
2 x 12W			
Product Code			LHT1133
LED Colour			3000K
Luminous Flux			1550 lm
IP Rating			IP65
Dimensions	280mm (A)	171mm (B) Ø	108mm (C)






## **TUTOKO**

- Subtle side light effect
- Durable, water and dustproof
- Excellent patio and entrance lighting
- Powder-coated cast alloy, UV-stabilised polycarbonate

#### 2 x 6W

Dundunk Ondo			LUT444C
Product Code			LHT1146
LED Colour			3000K
Luminous Flux			950 lm
IP Rating			IP65
Dimensions	178mm (A)	97mm (B)	63mm (C)








## **TONGARIRO**

- Subtle side light effect
- Durable, water and dustproof
- Excellent patio and entrance lighting
- Powder-coated cast alloy, UV-stabilised polycarbonate

#### 2 x 6W

Product Code			LHT1129
LED Colour			3000K
Luminous Flux			490 lm
IP Rating			IP65
Dimensions	175mm (A)	94mm (B)	Ø 63mm (C)






## **AORAKI**


- Subtle sidelight effect
- Durable, water and dustproof
- Warm white light creates a welcoming ambient
- Powder-coated cast alloy, UV-stabilised polycarbonate

#### 2 x 3W

Product Code			LHT1127
LED Colour			3000K
Luminous Flux			340 lm
IP Rating			IP65
Dimensions	142mm (A)	62mm (B)	54mm (C)
2 x 8W			
Product Code			LHT1128
LED Colour			3000K
Luminous Flux			850 lm
IP Rating			IP65
Dimensions	220mm (A)	70mm (B)	57mm (C)





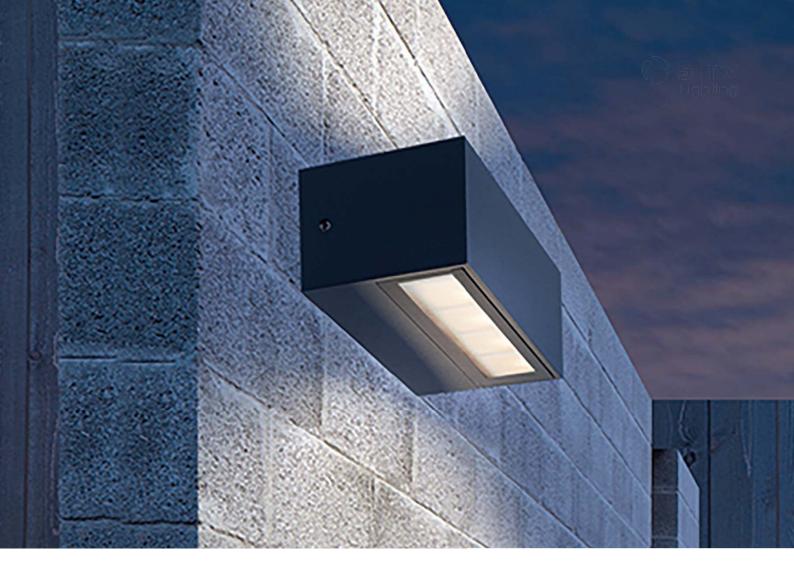




## **TARAWERA**

- Low glare direct output
- Robust and compact construction
- Creates beautiful grazing effect on facades Powder-coated cast alloy, tempered glass

#### 2 x 3W

Product Code			LHT1135
LED Colour			3000K
Luminous Flux			450 lm
IP Rating			IP65
Dimensions	142mm (A)	62mm (B)	47mm (C)
2 x 8W			
Product Code			LHT1136
LED Colour			3000K
Luminous Flux			1000 lm
IP Rating			IP65
Dimensions	220mm (A)	69mm (B)	45mm (C)





# **DOWNLIGHTERS**VERSATILE FACADE LIGHTING



### **TARAWERA**



RUAPEHU TUTOKO TONGARIRO







## **RUAPEHU**

- Contemporary and robust design
- High quality optics 38°
- · Low glare direct output
- Powder-coated cast alloy, tempered glass

#### 7W - ZERO UPLIGHT

Product Code			LHT1132
LED Colour			3000K
Luminous Flux			500 lm
IP Rating			IP65
Dimensions	120mm (A)	94mm (B)	Ø 63mm (C)

#### 12W - ZERO UPLIGHT

Product Code	LHT1134
LED Colour	3000K
Luminous Flux	810 lm
IP Rating	IP65
Dimensions	190mm (A) 171mm (B) Ø 108mm (C)

## **TUTOKO**

- · Subtle side light effect
- Durable, water and dustproof
- Excellent patio and entrance lighting
- · Powder-coated cast alloy, UV-stabilised polycarbonate

#### 7W - ZERO UPLIGHT

Product Code			LHT1145
LED Colour			3000K
Luminous Flux			500 lm
IP Rating			IP65
Dimensions	120mm (A)	97mm (B)	63mm (C)

## **TONGARIRO**

- Subtle side light effect
- Durable, water and dustproof
- Excellent patio and entrance lighting
- Powder-coated cast alloy, UV-stabilised polycarbonate

#### 7W

Product Code			LHT1130
LED Colour			3000K
Luminous Flux			275 lm
IP Rating			IP65
Dimensions	120mm (A)	94mm (B)	Ø 63mm (C)




## **TARAWERA**

- · Low glare direct output
- Robust and compact construction
- Creates beautiful grazing effect on facades
- Powder-coated cast alloy, tempered glass

#### 12W - ZERO UPLIGHT

Product Code			LHT1137
LED Colour			3000K
Luminous Flux			1550 lm
IP Rating			IP65
Dimensions	220mm (A)	72.5mm (B)	32mm (C)













## **LED STEPLIGHTS**



## **NON-INVASIVE PATHWAY AND PATIO LIGHTING**

**WAITOMO** 














**RUAKURI** 





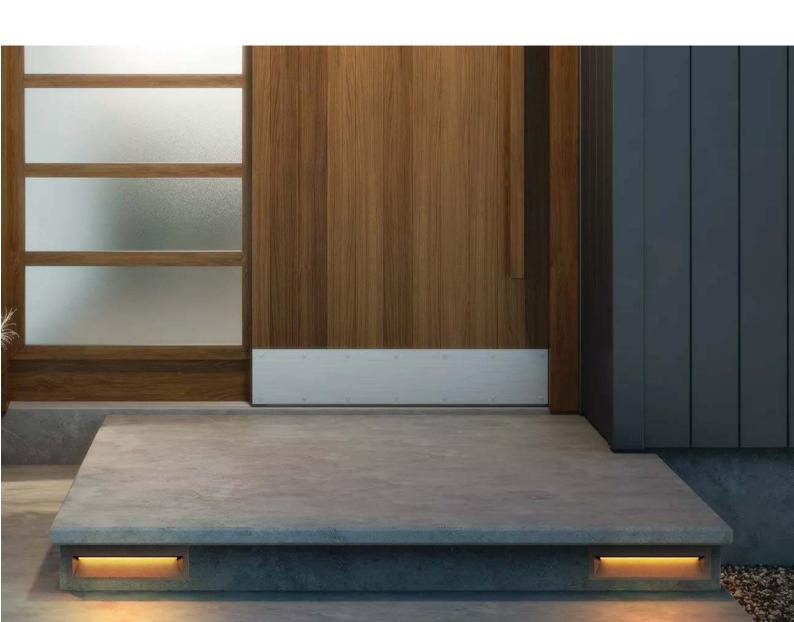

## **WAITOMO**

- 0% upward light
- Select LED colour temperature to suit location
- Powder-coated cast alloy
- Flush box for solid walls included

#### 3W LED STEPLIGHT - ROUND FAN

Product Code	Black		LHT1148
Product Gode	White		LHT1149
LED Colour Selectable		3000K, 400	0K, 6000K
Luminous Flux (approx)			120 lm
IP Rating			IP44
Dimensions		Ø 85mm (A)	54mm (B)

#### 3W LED STEPLIGHT - SQUARE FAN


B 1 10 1	Black		LHT1150
Product Code	White		LHT1151
LED Colour Selectable		3000K, 4000	OK, 6000K
Luminous Flux (approx)			120 lm
IP Rating			IP44
Dimensions	85mm (D)	57mm (E)	85mm (F)


#### **3W LED STEPLIGHT - SQUARE TIER**

Product Code	Black		LHT1152
Product Gode	White		LHT1153
LED Colour Selectable		3000K, 4000	K, 6000K
Luminous Flux (approx)			120 lm
IP Rating			IP44
Dimensions	85mm (G)	57mm (H)	85mm (l)





















## **RUAKURI**


- 0% upward light
- Powder-coated cast alloy
- Flush box for solid walls included

## 4W LED STEPLIGHT - LINEAR

<b>Product Code</b>			LHT1154
LED Colour		3	000K, CRI80
Luminous Flux			130 lm
IP Rating			IP65
Dimensions	160mm (A)	(B) 66mm	73mm (C)

### 10W LED STEPLIGHT - LINEAR

Product Code			LHT1155
LED Colour		3	000K, CRI80
Luminous Flux			380 lm
IP Rating			IP65
Dimensions	280mm (D)	66mm (E)	73mm (F)







## **ESYLUX**•

# **BOLLARDS**QUALITY SOLUTIONS FOR ACCESSWAYS AND PATHS







## **ESYLUX**•

## **ALVA**


- High grade construction protects against sea airSuitable for path, forecourt, driveway or green area lighting
- Powder-coated cast alloy

#### **7W CLEAR**

	3K	Anthracite	LHT1006
<b>Product Code</b>	4K	Anthracite	LHT1009
	411	White	LHT1008
LED Colour and		3000K	530 lm
Luminous Flux		4000K	560 lm
IP Rating			IP65
Rated Life		L70B1	10 = 105,000hrs
Dimensions		700mm (A)	Ø 100mm (B)
7W MILKY			
	3K	Anthracite	I HT1010

3K	Anthracite	LHT1010
4K	Anthracite	LHT1012
	3000K	400 lm
	4000K	460 lm
		IP65
	L70B1	0 = 105,000hrs
	700mm (A)	Ø 100mm (B)
		4K Anthracite 3000K 4000K L70B1

Also available in larger 16 watt models for commercial and public spaces





## **SENSORS**

## PERFECT PARTNERS FOR SECURITY AND SAFETY





**DEFENSOR** 



DEFENSOR TWILIGHT SWITCH



**TRINITY** 



MD-W



**RC 230i** 




SMART SENSE



COMPACT MINI



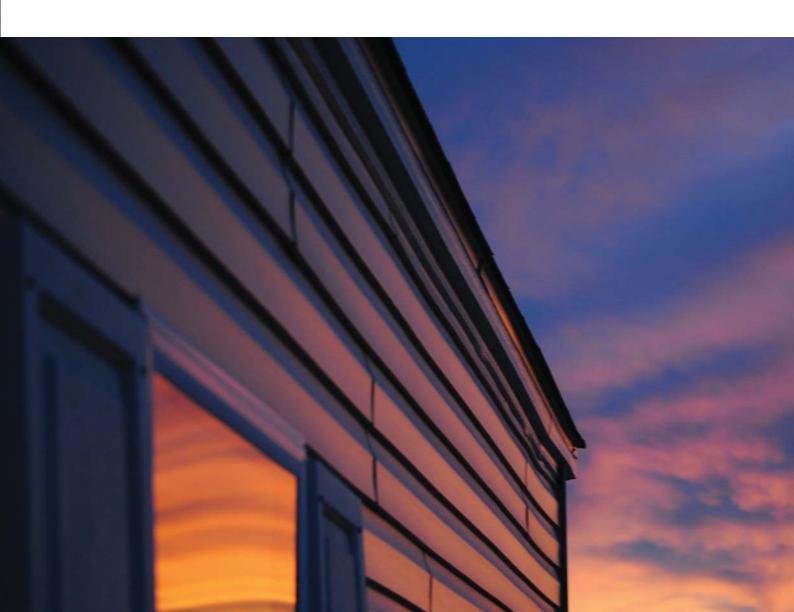



## **DEFENSOR**

- Time dependent operating modes
- Run-on time on direction of movement
- Intelligent protection against vandalism and sabotage
- Zero cross switching to protect relays
- UV-stabilised polycarbonate

### 230° (2 x 115°)

Anthracite	LHT1138
White	LHT1139
Horizontal	230° (2 x 115°)
Diagonal	Ø 40m
Head-on	Ø 10m
	1 - 240 mins
Resistive	2300W
LED	600W
	IP55
	White Horizontal Diagonal Head-on Resistive

## **DEFENSOR TWILIGHT SWITCH**

- Reliable and discreet safety
- Ambient lighting dependent switching
- Zero cross switching
- Time dependent operating modes

#### 2300W

2300W		
Product Code	Timer	LHT1141
Floudet Gode	No Timer	LHT1140
Ambient Light Detection		2 - 500 lux
Ambient Temperature		-25°C - 50°C
Impact Resistance		IK07
IP Rating		IP55

## **ESYLUX**•







## MD-W 200°

- Blends in harmoniously with design of outer facades
- Optimised for controlling LED lights in outdoor areas
- Individual fields of detection for two zones
- UV-stabilised polycarbonate

#### **MOTION DETECTION - 200°**

Product Code	Black	LHT0291
Product Gode	White	LHT0292
Detection (adjustable)		200° (2 x 100°)
Danga	Diagonal	Ø 20m
Range	Head-on	Ø 10m
Time on Adjustable		15 sec - 16 min
May Cuitobing	Resistive	2300W
Max. Switching	LED	600W
IP Rating		IP55



## **COMPACT MINI**

- Practically invisible due to trimless compact size
- No remote electronics required
- Instant operation with factory settings
- UV-stabilised polycarbonate

#### MOTION DETECTION - 360°

Ranne	Switching	Max. Switching	Cut-out Size	IP Rating	Product Code
6m	ON/OFF	170W LED	Ø 20mm	IP65	LHT0523
8m	ON/OFF	600W LED	Ø 25mm	IP55	LHT0307
12m	ON/OFF	600W LED	Ø 25mm	IP55	LHT0524

#### PRESENCE DETECTION - 360°

Range	Switching	Max. Switching	Cut-out Size	IP Rating	Product Code
6m	ON/OFF	170W LED	Ø 20mm	IP65	LHT0525
8m	ON/OFF	600W LED	Ø 25mm	IP55	LHT0526
OIII	Slave		Ø 25mm	IP55	LHT0529
12m	ON/OFF	600W LED	Ø 25mm	IP55	LHT0527

Also available for 12V DC, 12-36V AC/DC, DALI and KNX



## **RC 230i**

- Wall or ceiling mounting
- High level of safety with 360° creep alert
- Zero-crossing switching to protect relays with high inrush
- UV-stabilised polycarbonate

#### 230° (2 x 115°)

Product Code	Black	LHT0318
Floudet Gode	White	LHT0319
Detection (adjustable)		230° (2 x 115°)
Range	Diagonal	Ø 40m
nange	Head-on	Ø 16m
Max. Switching	Resistive	2300W
Max. Switching	LED	600W
IP Rating		IP54





## **TRINITY 180°**

- Scrolling LED as intruder deterrent
- Integral 16A relay for switching UV-stabilised polycarbonate

### TRINITY 180°

Product Code	Black	LHT0238
Product Gode	White	LHT0239
Detection		180° Forward
Range		10m
Time On Adjustable		5 sec-15 min
Max. Switching	Resistive	3000W
iviax. Switching	LED	110W
IP Rating		IP55





## **SMART SENSE 180°**

- Wall or ceiling mount
  Large accessible wiring box
  Integral 12A relay for switching
  UV-stabilised polycarbonate

#### SMART SENSE 180°

Product Code	Black	LHT0119
Product Gode	White	LHT0120
Detection		180° Forward
Range		12m
Time On Adjustable		5 sec-5 min
Max. Switching	Resistive	2000W
wax. Switching	LED	110W
IP Rating		IP55





## SPOTLIGHTS & FLOODLIGHTS



## INTELLIGENT LIGHTING FOR SECURITY AND SAFETY

SENSOR LED MAX

**ECOSPOT SELECT** 

LED ECOSPOT

**TRINITY LED** 









**ROBO LED** 

**CHAMELEON** 

**REFLECT LED** 

**FLOOD LED** 












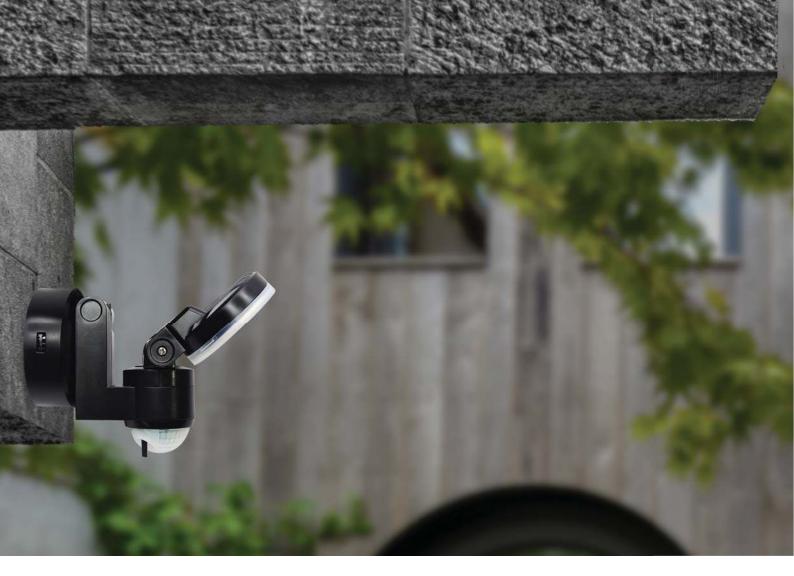



## **SENSOR LED & SENSOR LED MAX**

- Compact construction for discrete use

- Wall or ceiling mount
  High weatherproof rating
  UV-stabilised polycarbonate

### SENSOR LED

Product Code	2 x 4W PIR Black White	Black	LHT1081
		LHT1082	
	2 x 8W PIR	Black	LHT0269
	2 X OW FIN	White	LHT0270
Detection			140° Forward
Range			8m
Time On Adjustable			30 sec-6 min
LED Colour			3100K
Luminous Flux		2 x 4W	550 lm
Lummous mux		2 x 8W	1200 lm
Beam Angle			95°
IP Rating			IP55



## **ECOSPOT SELECT**

- Lamp colour selectable
- Wall or ceiling mountBacklight restricted optics
- UV-stabilised polycarbonate

#### **ECOSPOT SELECT**

Product Code	2 x 10W PIR	Black	LHT1054
	2 X TOW FIN	White	LHT1055
Detection			150°
Range			10m
Time On Adjustable	е		10 sec-4 min
		3000K	1800 lm
LED Colour & Lumi	inous Flux	4000K	2000 lm
		5000K	2000 lm
Pan/Tilt			Yes
IP Rating			IP54

Also available without sensor in twin or single models as below

#### **ECOSPOT SELECT**

Product Code	2 x 10W	Black	LHT1056
	ZXIUW	White	LHT1057
1 x 10W			
Product Code 1 x 10W		Black	LHT1058
Product Code	IXIUW	White	LHT1059











## **LED ECOSPOT**

- Wall or ceiling mount
- Extra wide beam optics
- Cast alloy, UV-stabilised polycarbonate

#### LED ECOSPOT

Product Code	2 x 8W PIR	Black	LHT0244
		White	LHT0250
Detection			180°
Range			12m
Time On Adjustable			10 sec-4 min
LED Colour			3500K
Luminous Flux			1440 lm
Beam Angle			105°
Pan/Tilt			Yes
IP Rating			IP44

Also available without sensor in twin or single models as below

#### LED ECOSPOT

Product Code	2 x 8W Black	Black	LHT0248
Flounci Gode	Z X OVV	White	LHT0249
LED ECOSPOT			
Product Code	1 x 8W	Black	LHT0246
Flounci cone	IXOV	White	LHT0247













## **TRINITY LED**

- Scrolling LED as intruder deterrent
- Auto sensor, manual and timer modes
  Wide beam high output twin 12W LED
  Cast alloy, UV-stabilised polycarbonate

### TRINITY LED

Product Code	2 x 12W PIR	Black	LHT0331
Fibuuci coue		White	LHT0332
Detection		3m	180°
Detection		12m	80°
Range			up to 12m
Auto Time On Adjustable			5 sec-7 min
LED Colour			5500K
Luminous Flux			1600 lm
Beam Angle			105°
IP Rating			IP44



## **ROBO LED**

- Motorised light follows movement in the detection zone
- PIR sensor for system efficiency
- Cover much larger areas with less fittings
- Cast alloy, UV-stabilised polycarbonate

#### 18W

Product Code	LHT1083
Detection	270°
Range	10m
Time On (fixed)	3 min
LED Colour	4000K
Luminous Flux	1100 lm
Motorised Head Pan	<u>+</u> 90°
IP Rating	IP44





## **REFLECT LED**

- Rear projection technologySwitchable PIR detect or dusk/dawn operation
- Extruded alloy, UV-stabilised polycarbonate

#### REFLECT LED

	12W	Black	LHT0271
		White	LHT0272
	12W PIR	Black	LHT0277
	20W	Black	LHT0273
Product Code		White	LHT0274
1 Todact oode	20W PIR	White LH	LHT0280
	26W	Black	LHT0275
		White	LHT0276
	26W PIR	Black	LHT0281
		White	LHT0282
Detection		12	20° Forward
Range			10m
Time On Adjustable		5	sec-10 min
LED Colour			5700K
Luminous Flux & Beam Spread	12W	500 lm	105°
	20W	1000 lm	110°
	26W	1500 lm	110°
Dusk Control		2-2000 Lu	x Adjustment
ID Pating		PIR	IP54
IP Rating		Non-PIR	IP55
-			

Also available without sensor in single or twin models



## **FLOOD LED**

- Best choice for commercial and industrial applications
- Optimised thermal fins for heat dissipation
- Long life components
- Cast alloy, tempered glass

#### FLOOD LED

Product Code	30W	LHT0214
Fibuuci Goue	50W	LHT0215
LED Colour		5700K
Luminous Flux	30W	2350 lm
Lummous mux	50W	4250 lm
Beam Spread		110°
Rated Life		L70 B50 = 56,000 hrs
Cable (fitted)		1800mm
IP Rating		IP65






## **CHAMELEON**

- Select LED colour temperature to suit application
- 8 step dimming with remote controller (included) Grouping capable for synchronised operation
- Powder-coated cast alloy, tempered glass

Product Code	Black	LHT1096
Fibuuci Goue	White	LHT1097
LED Colour		3000K / 4000K / 5000K
Luminous Flux (adjus	table)	130-1500 lm
Cable (fitted)		900 mm
IP Rating		IP65



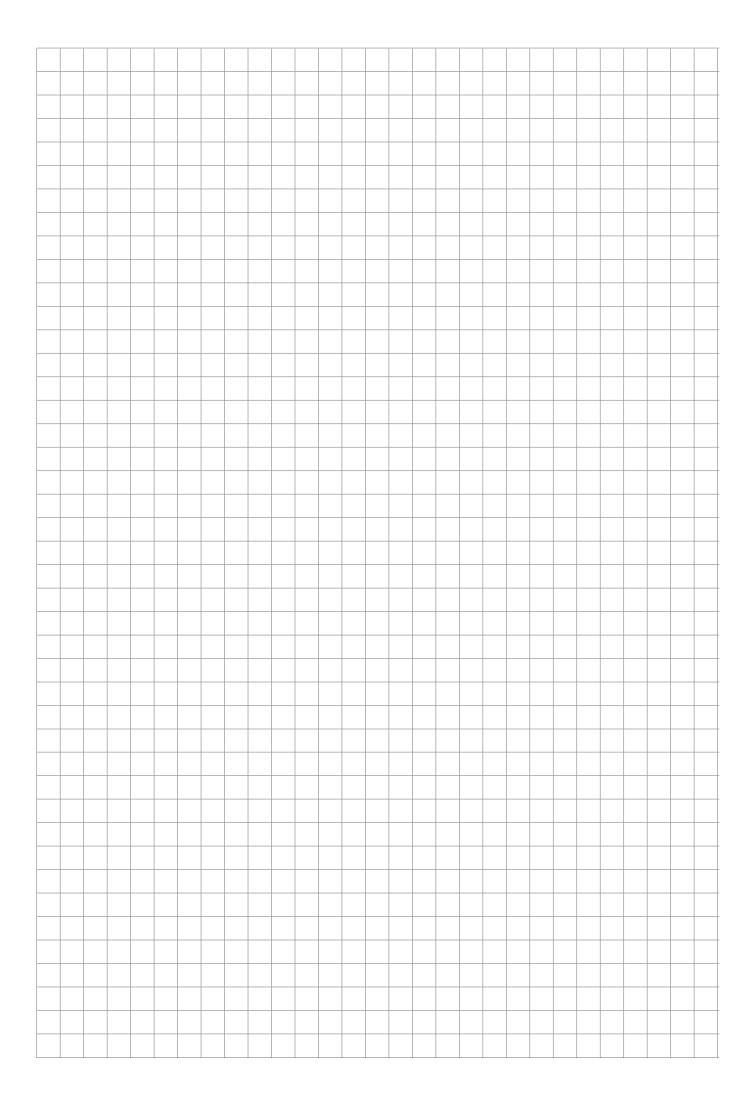



Simx Lighting
PO Box 14347, Panmure, Auckland NZ
e: lighting@simx.co.nz | w: www.simx.co.nz | p: +64 9 259 1660