

## Product data sheet

### Characteristics

## XALK01

Harmony XALD, XALK, Empty enclosure,  
plastic, yellow lid for push button Ø22, 1 cut-out



### Main

|                             |                                                                                                                                   |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Range of product            | Harmony XALK                                                                                                                      |
| Product or component type   | Empty control station                                                                                                             |
| Device short name           | XALK                                                                                                                              |
| Product destination         | For XB5 Ø 22 mm control and signalling units                                                                                      |
| Control station application | Emergency stop function<br>Emergency switching off function                                                                       |
| Number of cut-out           | 1 cut-out                                                                                                                         |
| Colour of base of enclosure | Light grey (RAL 7035)                                                                                                             |
| Colour of cover             | Yellow (RAL 1021)                                                                                                                 |
| Material                    | Polycarbonate                                                                                                                     |
| Cable entry                 | 1 knock-out for cable entry, clamping capacity: 14 mm<br>2 knock-outs for Pg 13 cable gland and ISO M20, clamping capacity: 12 mm |
| IP degree of protection     | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K                                                                             |

### Complementary

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Assembly style                     | For customer assembly                 |
| Number of horizontal rows          | 1                                     |
| Number of vertical rows            | 1                                     |
| Net weight                         | 0.136 kg                              |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m |
| Mounting of block                  | Front mounting<br>Rear mounting       |
| Electrical composition code        | SR1<br>SF1<br>MR1<br>MF1              |
| Main group                         | 1 cut-out                             |
| Group of product                   | Standard yellow                       |

### Environment

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Protective treatment                  | TH                               |
| Ambient air temperature for storage   | -40...70 °C                      |
| Ambient air temperature for operation | -40...70 °C                      |
| Overvoltage category                  | Class II conforming to IEC 60536 |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X               |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                         |                                                                                                                                         |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| IK degree of protection | IK03 conforming to EN 50102                                                                                                             |
| Standards               | EN/IEC 60947-5-5<br>UL 508<br>EN/IEC 60947-5-4<br>JIS C8201-5-1<br>CSA C22.2 No 14<br>EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>JIS C8201-1 |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Weight             | 118 g     |
| Package 1 Height             | 6.8 cm    |
| Package 1 width              | 7.5 cm    |
| Package 1 Length             | 6.8 cm    |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 60        |
| Package 2 Weight             | 7.468 kg  |
| Package 2 Height             | 30 cm     |
| Package 2 width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Unit Type of Package 3       | P06       |
| Number of Units in Package 3 | 480       |
| Package 3 Weight             | 73.724 kg |
| Package 3 Height             | 77 cm     |
| Package 3 width              | 80 cm     |
| Package 3 Length             | 60 cm     |


## Offer Sustainability

|                            |                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                |
| REACH Regulation           |  <a href="#">REACH Declaration</a>                                                                |
| REACH free of SVHC         | Yes                                                                                                                                                                                  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                                                                                                                  |
| Mercury free               | Yes                                                                                                                                                                                  |
| RoHS exemption information |  <a href="#">Yes</a>                                                                              |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>                                                           |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>                                                    |
| Circularity Profile        |  <a href="#">End Of Life Information</a>                                                          |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

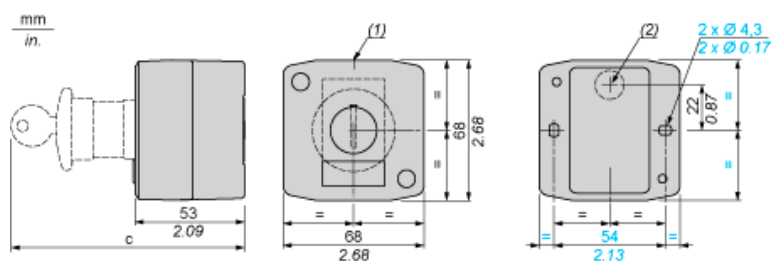

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in.  
(2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

| Control station fitted with:                              | c in mm | c in in. |
|-----------------------------------------------------------|---------|----------|
| Flush pushbutton                                          | 62      | 2.44     |
| Pilot light                                               | 64      | 2.52     |
| Illuminated pushbutton                                    | 65.5    | 2.58     |
| Projecting pushbutton                                     | 66      | 2.60     |
| Selector switch                                           | 80      | 3.15     |
| Mushroom head pushbutton                                  | 91.5    | 3.58     |
| Latching mushroom head Emergency stop pushbutton with key | 115     | 4.53     |
| Key switch                                                | 105.5   | 4.15     |