

GPM/GPG SERIES

Nylon Standard Gland IP68
(complete with Locknut)



APPLICATIONS:

Gland For watertight glanding of unscreened circular cables.

PRODUCT FEATURES:

- ▶ Sealing nut has a locking mechanism to hold cable firmly and to accommodate a wider cable range
- ▶ Long metric thread to aid installation
- ▶ UL nylon 66 94V-2 halogen free
- ▶ UV stabilised
- ▶ Self extinguishing

CONSTRUCTION:

Material Black or Grey nylon body.

Seal EPDM rubber.


Washer EPDM rubber.

Insert Polyamide traction relief clamping insert.

CHARACTERISTICS:

Operating Temperature Range -40°C to 100°C. Up to 120°C for short periods.

Protection Class Water rating IP68. Pressure rating 5 bar.

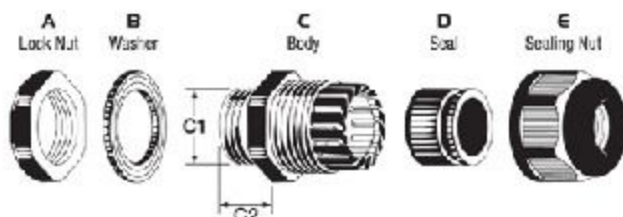

Available in Black or Grey

Code	Entry Thread (mm) C1	Thread Length (mm) C2	Cable Size Min - Max (mm)	Spanner Size A/E (mm)
GPM12	M12 x 1.5	15.0	3.0 - 7.0	18/19
GPM16	M16 x 1.5	15.0	4.0 - 10.0	22/22
GPM20	M20 x 1.5	15.0	5.0 - 13.5	27/27
GPM25	M25 x 1.5	15.0	10.0 - 18.0	33/33
GPM32	M32 x 1.5	15.0	16.0 - 25.0	41/42
GPM40	M40 x 1.5	15.0	20.0 - 31.0	50/52
GPM50	M50 x 1.5	15.0	30.0 - 41.0	62/62
GPM63	M63 x 1.5	18.0	33.0 - 46.0	75/65
GPG7	12.50	8.0	2.0 - 6.0	17/15
GPG9	15.20	8.0	3.0 - 7.5	22/19
GPG11	18.60	10.0	4.0 - 10.0	24/22
GPG13.5	20.40	10.0	5.0 - 12.5	27/24
GPG16	22.50	11.0	6.0 - 14.0	30/27
GPG21	28.30	12.0	10.0 - 17.5	36/33
GPG29	37.00	12.0	16.0 - 24.0	46/41
GPG36	47.00	14.0	18.0 - 31.0	57/52