
Type MZ Cast Resin Joint



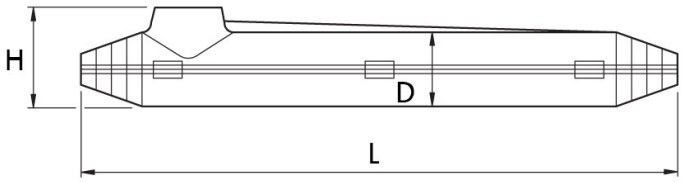

FEATURES:

Voltage Level	Uo /U (Um) 0.6/1 (1.2) kV
Applications	Indoor Underground Outdoor Cable trays Water
Product Supplied with	Transparent mould Funnel Sealing tape Gloves Illustrated easy–to–follow mounting instructions Hydrolysis resistant PUR type EG cast–resin, containing the correct volume needed ready for mixing, in handy two chamber mixing bag
Features	Large insertion opening for easy casting High electrical insulation value Watertight Compact size High mechanical strength Standard resin can be stored for up to 40 months High quality, transparent and shockproof plastic mould Visible splice position before casting Extremely quick and easy to use, saving time and money Resistant to UV–radiation, alkaline earths and chemical agents Ready for immediate use
Approvals	DIN VDE 0278 part 1 and 3 DIN VDE 0278 part 393 EN 50393 as well as CENELEC HD 623 (VDE 0278, part 623)

SPECIFICATIONS:

PART NUMBER	TYPE	CABLE DIAMETER (MM)	DIMENSIONS (MM)			WIRE DIAMETER (MM)				
			L	D	H	0.4	0.6	0.8	1.5	2.5
						NUMBER OF PAIRS			NUMBER OF CONDUCTORS	
ALC124MZ00	MZ00	20	180	23	35	10–15	5–10	5–10	7	5
ALC124MZ0	MZ0	25	250	35	55	15–30	10–20	10–20	15	10

Suitable for connecting low-voltage plastic insulated cables or PVC, PE, VPE and EPR insulated conductors.

Wattmaster
THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 **F:** 1300 300 074
www.wattmaster.com.au