



EventSeries™ OFC Microphone Cable MLX2

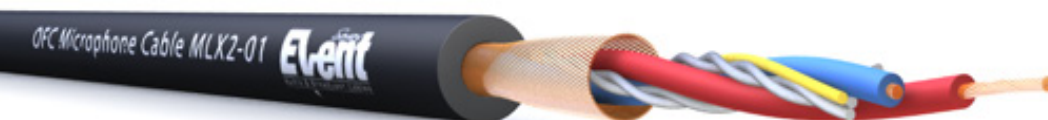

Application

MLX2 is a professional grade oxygen free microphone cable. It has a LAP screen and an enlarged sheath which is made of a very soft and flexible compound mix with matt finish. The cable also has a kevlar strength member adding to the cables durability.

Key Features:

- High flex
- Supple matt finish
- Kevlar for pull strength
- Kink resistant

Cable Construction

Conductor	Oxygen free Copper, 28 x 0.1mm (0.22mm ²)
Insulation	Special Polymer. Red/Blue cores
No. Of Pairs	1
Strain Relief	Kevlar strength member with cotton fillers
Shield	Bare copper spiral screen
Outer Jacket	Technopolemero, Black

Electrical Characteristics

Nom. Capacitance (cond./cond.)	90 pF/m
Nom. Capacitance (cond./cond./shield)	180 pF/m
Conductor resistance	85 Ω/km
Insulation resistance	100 MΩ*km
Operating voltage	50/75 V AC/DC
Test voltage (at 50Hz eff. for 1min.)	> 1 kV

Part Number	Ø - Outer Jacket (mm)	Colour
MLX2-01	6.35	Black 
MLX2-02	6.35	Blue 
MLX2-03	6.35	Green 
MLX2-04	6.35	Red 
MLX2-05	6.35	Grey 
MLX2-06	6.35	Yellow 
MLX2-08	6.35	Orange 
MLX2-09	6.35	Violet 