


1010CSZ-BB

Switched socket, Clipsal Solis T Series,
ZigBee, Wiser Connected, Horizontal Mount,
10A, brushed brass

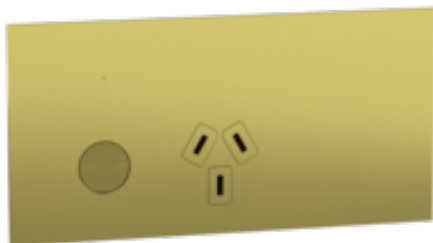

Launching in : SEP 2025

ⓘ Coming soon

Main

Range	Clipsal Solis T Series
Product or component type	Socket with wiser connected switch
Product brand	Clipsal
Device presentation	Complete product
Colour tint	Brushed brass
Software name	Wiser Home
Socket additional information	Shuttered
Memory usage	Backup
Main colour tint	Brushed brass

Complementary

Control type	Rocker
Number of power socket outlets	1
Socket-outlet type	Single socket-outlet
Fixing mode	Screw
Device mounting	Flush
Mounting position	Horizontal
Material	Aluminium
Surface finish	Metallic
[Ue] rated operational voltage	230/240 V AC
Network frequency	50 Hz
[In] rated current	10 A
Connections - terminals	4 x 2.5 mm ² screw terminals 3 x 4 mm ² screw terminals
Embedding depth	63 Mm
Depth	66.9 Mm
Height	74 Mm
Width	148 Mm
Fixing center	84 mm
Communication network type	ZigBee 50 m
Cut-out dimensions	93 x 50 mm
Surface treatment	Anodised

Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)
Wire stripping length	16 Mm
Number of power socket outlets	1 x 2P + E, Australian/New Zealand
Thickness	3.9 Mm
Number of rocker	1

Environment

Product certifications	RCM
Standards	AS/NZS 3112
Relative humidity	10...95 %
Ambient air temperature for operation	0...45 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 Cm
Package 1 Width	8 Cm
Package 1 Length	8 Cm
Package 1 Weight	214 G
Unit Type of Package 2	CAR
Number of Units in Package 2	30
Package 2 Height	32.5 Cm
Package 2 Width	25 Cm
Package 2 Length	41 Cm
Package 2 Weight	6.8 Kg

Offer Sustainability

Total lifecycle Carbon footprint	3 kg CO2 eq.
Carbon footprint of the manufacturing-phase [A1 to A3]	0.7235720048420458
Carbon footprint of the manufacturing-phase [A1 to A3]	0.7 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	1.0520052263712343
Carbon footprint of the distribution phase [A4]	1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.004002423068707383
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0.4193009966013595
Carbon footprint of the use phase [B2, B3, B4, B6]	0.4 kg CO2 eq.
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	No
RoHS exemption information	 Yes
Carbon footprint of the end-of-life phase [C1 to C4]	0.32630036454076844
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	 Product Environmental Profile
Total lifecycle Carbon footprint	3
EU RoHS Directive	Compliant  EU RoHS Declaration
REACH Regulation	 REACH Declaration
End of life manual availability	No need of specific recycling operations
Take-back	No

Product Life Status : **Precommercialisation**