Product data sheet
Characteristics

1044TA-BB
Switch, Clipsal Solis T Series, 4 gangs, horizontal, 16AX/20A, brushed brass

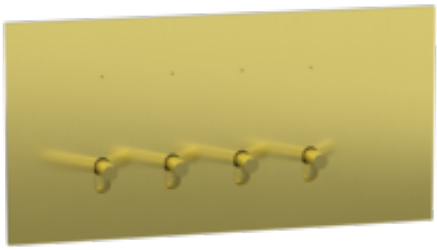

Launching in : SEP 2025

Coming soon

Main

Range	Clipsal Solis T Series
Product brand	Clipsal
Product or component type	Switch
Device presentation	Complete product
Outlet standard deviation	Australian/New Zealand
Colour tint	Brushed brass

Complementary

Number of gangs	4 gangs
[Ue] rated operational voltage	230/240 V
Network type	AC
Network frequency	50 Hz
Rated current	20 A/16 AX
Control type	Toggle switch
Connections - terminals	Screw terminals
Device mounting	Flush
Number of rocker	4
Material	Aluminium
Installation direction	Horizontal
Surface treatment	Metallic
Load type	LEDi lamp 0...250 W 20 A/16 AX
Clamping connection capacity	4 x 1.5...3 x 2.5 mm²
Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)
Wire stripping length	10 Mm
Fixing mode	Screw
Thickness	3.6 Mm
Fixing center	120 mm
Cut-out dimensions	130 x 50 mm
Product certifications	RCM
Surface finish	Anodised
Height	74 Mm
Width	148 Mm

Depth	56 Mm
Embedding depth	41 Mm
Motor M-rating AS3133	M80
Switch function	1-pole 1/2-way

Environment

Ambient air temperature for operation	0…45 °C
Relative humidity	10…95 %
Standards	AS/NZS 60669

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 Cm
Package 1 Width	8 Cm
Package 1 Length	8 Cm
Package 1 Weight	160 G
Unit Type of Package 2	CAR
Number of Units in Package 2	30
Package 2 Height	34 Cm
Package 2 Width	36 Cm
Package 2 Length	48 Cm
Package 2 Weight	4.884 Kg

Offer Sustainability

Total lifecycle Carbon footprint	2 kg CO2 eq.
Carbon footprint of the manufacturing-phase [A1 to A3]	0.56401510121021
Carbon footprint of the manufacturing-phase [A1 to A3]	0.6 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.8200245867098852
Carbon footprint of the distribution phase [A4]	0.8 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.00311983746894114
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0.4193009966013595
Carbon footprint of the use phase [B2, B3, B4, B6]	0.4 kg CO2 eq.
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	No
RoHS exemption information	Yes
Carbon footprint of the end-of-life phase [C1 to C4]	0.2543469508215221
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Total lifecycle Carbon footprint	2
EU RoHS Directive	Compliant EU RoHS Declaration
REACh Regulation	REACh Declaration
End of life manual availability	No need of specific recycling operations
Take-back	No

Product Life Status : Precommercialisation