



LED FIRE BASIC



FEATURES

- Long life electronics
- Low energy consumption
- Emergency output 140 lm
- Compliant emergency lighting
- High Quality Lithium batteries (LiFePO₄)
- Includes outer ring to suit hole sizes up to 130 mm



SELF-CONTAINED

Fully self-contained inbuilt battery and control gear



CORRIDOR LENS

Snap-on lens to suit escape route lighting




SINGLE POINT UNIT

Ektor products work as SPUs out of the box



WIDE AREA LENS

Snap-on lens to suit open plan areas

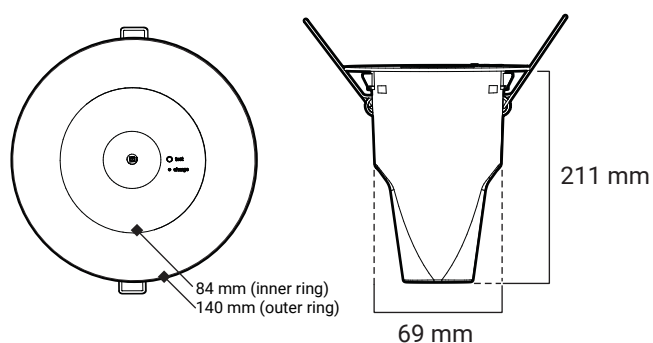

PRODUCT RANGE

ORDER CODE

QTY

EV-LED FIRE-BASIC

Ledfire Basic Emergency Luminaire

4

FEATURES

- Long life electronics
- Low energy consumption
- Emergency output 140 lm
- Compliant emergency luminaire
- High Quality Lithium battery (LiFePO₄)
- High ambient temperature rating (40°C)
- Includes outer ring to suit hole sizes up to 130 mm
- 4 Years Design Life – 35,000 hours at max. ambient*
- Wide Area and Corridor mode snap-on lenses available

*Excludes battery

ACCESSORY RANGE

ORDER CODE

DESCRIPTION

ZC-BATT-3000MAH-1

zencontrol 3000mAh 3.2V 1 Cell LiFePO₄ Battery

OPERATIONAL INFORMATION

GENERAL

Voltage ~230V

Frequency 50Hz

Ambient temp. 0 - 40°C

Class 2

Wiring Soft wiring

Mounting type Recessed

IP rating IP20

LED wattage 1.5 W

Avg. circuit power 0.45 W

Max. circuit power 2 W

EMERGENCY

Rated duration 3 hours

Rated lumens 140 lm

COMPLIANCE

Standards IEC 60598-2-22
CISPR 15
EMC-2004/108/EC
LVD-2006/95/EC

BATTERY

CHARGE

Type LiFePO₄

Type Variable

Voltage 3.2 V

Time 16 Hours

Code zc-batt-3000mah-1

CONSTRUCTION

Body PC

Dish PC

Cut out 70 mm inner / 75 - 130 mm outer ring

NOTE: For more information on the chemical resistance of our polycarbonate, please see our website.

Datasheet is subject to change without notice, E&OE
Last updated: 27 September 2018 _V2.1