

Metallic Systems

SPL Fitting Type B



Technical Characteristics

Conforms to	BSI Kitemark KM-35161 CE mark to the Low Voltage Directive Inherent Low Fire Hazard		
Approvals and Standards	 		
Degree of mechanical protection	Very High		
Degree of protection	IP67 - with all Adaptasteel liquid tight conduit in the series		
UV protection	Very High		
Fitting characteristics		Straight fitting - swivel external male thread	
Application	For insertion into threaded entries & knockouts using a locknut		
Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 65°C	+150°C
	Dynamic	- 45°C	+150°C
For use with - Conduit series	Type SPL , SPL-EE , SPLHC & SPUL		
Fire performance	Test Standard		Performance Rating
	Not Rated		Not Rated
Testing data	Click or see page 4		
Type of material	Nickel Plated Brass, Co-Polyester seal - Nylon inserts		

Image




Metallic Systems

SPL Fitting Type B



Dimensional Data

Part No	Thread A	Nominal Dimensions (mm)				Nominal Conduit - ø F (mm)
		B	C	D	E	
SPL12/M16/B	M16 x 1.5	13.0	27.0	22.0	10.3	24.0
SPL16/M20/B	M20 x 1.5	13.5	27.0	24.0	10.3	24.0
SPL20/M20/B	M20 x 1.5	15.0	31.0	25.4	14.3	27.0
SPL25/M25/B	M25 x 1.5	17.0	40.0	32.0	17.6	34.0
SPL32/M32/B	M32 x 1.5	19.0	48.0	38.0	24.0	42.0

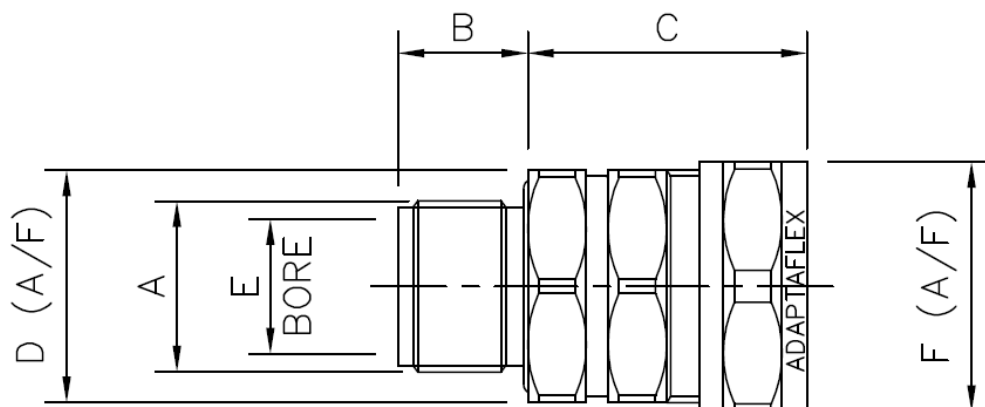


Metallic Systems

SPL Fitting Type B



Dimensional Data

Part No	Thread A	Nominal Dimensions (mm)				Nominal Conduit - ø F (mm)
		B	C	D	E	
SPL16/PG11/B	PG11	10.0	11.5	25.5	10.3	17.0
SPL16/PG13/B	PG13.5	13.5	27.0	24.0	10.3	24.0
SPL20/PG16/B	PG16	12.0	15.3	29.0	14.3	21.0
SPL25/PG21/B	PG21	12.0	19.0	36.5	17.6	26.0
SPL32/PG29/B	PG29	14.0	26.2	39.0	24.0	34.0

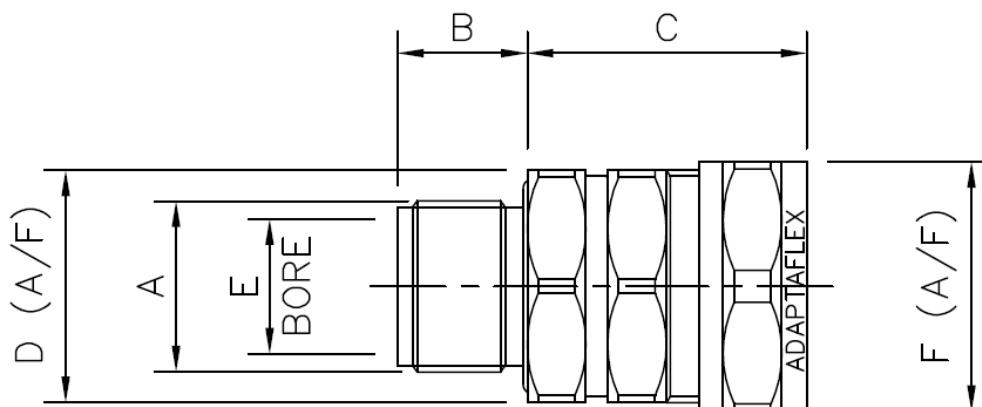

Metallic Systems

SPL Fitting Type B



Chemical Resistance Chart

Key:

Suitable :



Limited Suitability :



Unsuitable :



Not Tested :



Astm No.1	Diesel oil	Methyl Bromide	Sulphur Dioxide (Gas)
Astm No.2	Diethylamine	MEK	Sulphuric Acid (10%)
Astm No.3	Ethanol	Nitric Acid (10%)	Sulphuric Acid (70%)
Acetic Acid (10%)	Ether	Nitric Acid (70%)	Toluene
Acetone	Ethylamine	Oxalic Acid	Transformer Oil
Aluminium Chloride	Ethylene Glycol	Ozone (Gas)	1,1,1-Trichloroethane
Aniline	Ethyl Ethanoate	Paraffin oil	Trichloroethylene
Benzaldehyde	Freon 32	Petrol	Turpentine
Benzene	Hydrochloric Acid (10%)	Phenol	Vegetable Oil
Carbon tetrachloride	Hydrochloric Acid (36%)	Sea Water	Vinyl Acetate
Chlorine water	Hydrogen Peroxide (35%)	Silver Nitrate	Water
Chloroform	Hydrogen Peroxide (87%)	Skydrol	White Spirit
Citric Acid	Lactic Acid	Sodium Chloride	Zinc Chloride
Copper Sulphate	Lubricating oil	Sodium Hydroxide (10%)	
Cresol	Methanol	Sodium Hydroxide (60%)	

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact Thomas & Betts for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Thread Data

Metric	Standard thread conforming to EN60423 & BS3643			PG	German Standard thread conforming to DIN40430		
Thread Size mm	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch	Thread Size	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch
M10	10.0	8.9	1.0	PG7	12.5	11.3	1.27
M12	12.0	10.4	1.5	PG9	15.2	13.9	1.41
M16	16.0	14.4	1.5	PG11	18.6	17.3	1.41
M20	20.0	18.4	1.5	PG13.5	20.4	19.1	1.41
M25	25.0	23.4	1.5	PG16	22.5	21.2	1.41
M32	32.0	30.4	1.5	PG21	28.3	26.8	1.59
M40	40.0	38.4	1.5	PG29	37.0	35.5	1.59
M50	50.0	48.4	1.5	PG36	47.0	45.5	1.59
M63	63.0	61.4	1.5	PG42	54.0	52.2	1.59
M75	75.0	73.4	1.5	PG48	59.3	57.8	1.59