

Constant Current - Mini Slim


Primary Dimmable

120-700mA

<8W



- Constant Current [Series Circuit]
- Trailing Edge Dimmable
- Dimming Range 10-100%
- Ambient Temp -20..+50°C
- SELV Equivalent
- Configurable Constant Current Output via Dip-switch
- Open circuit, Overload, Short Circuit, Overtemperature Protection
- Self-extinguishing Plastic Housing
- "Flicker-free", PstLM ≤1.0; SVM ≤0.4
- Protection Class II
- 5 Year Warranty

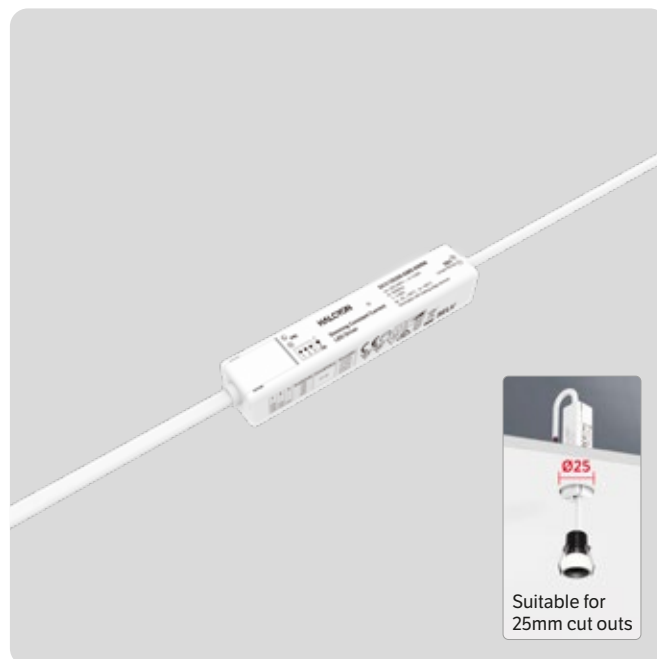

Code	Output Current [mA]	Min/Max Output [W]	Input Voltage [V]	Output Voltage [V]	Power Factor [λ]	Dimensions L x W x H [mm]
DCC120200-DMS-5W8W	120mA	3.24-5.04W	220-240V ~ 50/60Hz	27-42V	0.90C	L100 x W20 x H18.5mm
	> 150mA	4.05-6.3W	220-240V ~ 50/60Hz	27-42V	0.90C	L100 x W20 x H18.5mm
	> 180mA	4.86-7.56W	220-240V ~ 50/60Hz	27-42V	0.90C	L100 x W20 x H18.5mm
	> 200mA	5.4-8.4W	220-240V ~ 50/60Hz	27-42V	0.90C	L100 x W20 x H18.5mm
DCC200350-DMS-4W8W	200mA	2.2-4.4W	220-240V ~ 50/60Hz	11-22V	0.90C	L100 x W20 x H18.5mm
	> 250mA	2.75-5.5W	220-240V ~ 50/60Hz	11-22V	0.90C	L100 x W20 x H18.5mm
	> 300mA	3.3-6.6W	220-240V ~ 50/60Hz	11-22V	0.90C	L100 x W20 x H18.5mm
	> 350mA	3.85-7.7W	220-240V ~ 50/60Hz	11-22V	0.90C	L100 x W20 x H18.5mm
DCC350500-DMS-2W4W	350mA	0.88-2.45W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
	> 400mA	1.0-2.8W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
	> 450mA	1.13-3.15W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
	> 500mA	1.25-3.5W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
DCC550700-DMS-4W5W	550mA	1.38-3.85W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
	> 600mA	1.5-4.2W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
	> 650mA	1.63-4.55W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm
	> 700mA	1.75-4.9W	220-240V ~ 50/60Hz	2.5-7V	0.90C	L100 x W20 x H18.5mm