EX131

LEDE

Surface Mount Column Spot

LEDE One Way Up or Down Select 3K/4K

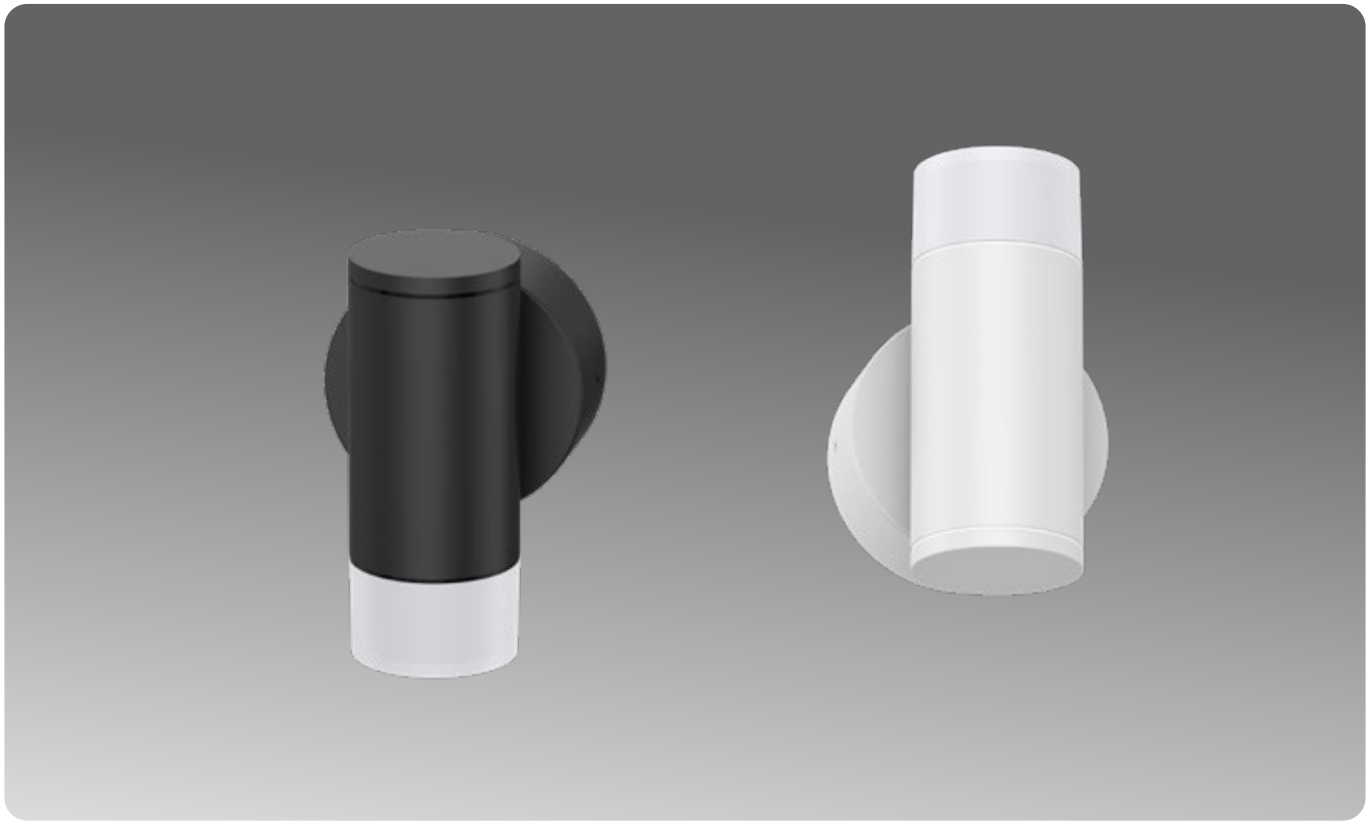

SPECIFICATIONS

DIMENSIONS	*Overall: L146 x W95 x D100mm* *Spot: D60mm x H146mm* *Base: D95mm*
COLOUR TEMP	*Selectable 3000K Warm White or 4000K Natural White*
LUMENS	*3000K Warm White / 350lm* *4000K Natural White / 370lm*
CRI	*80*
LIFESPAN	*>54,000 hours (L80)*
BEAM ANGLE	*170°*
MATERIAL	*Aluminium, PC*
IP RATING	*IP65*
DRIVER	*Dimmable driver incorporated*
ELECTRICAL CLASS	*Class I luminaire, requires earth.*
APPLICATION	*Exterior Residential and Commercial, suitable for use in both upwards or downwards orientation. Install with pride, ensure cable entry gland is adequately sealed with silicone.*
WARRANTY	*5 Year Warranty*

<370 LUMENS | **5 WATTS** | **AC 240V**

select CCT

AVAILABLE IN

DESCRIPTION	CODE
Black, “Select” 3000K/4000K	EX131 B34
White, “Select” 3000K/4000K	EX131 W34

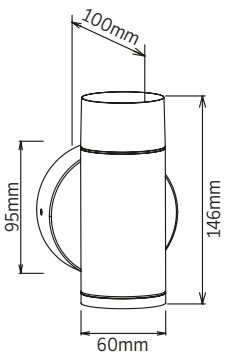

HALCYON