
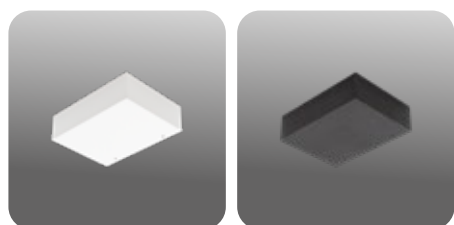


U970

Surface Mount UpLight Fixed Slim Select 3K/4K Asymmetric 160mm

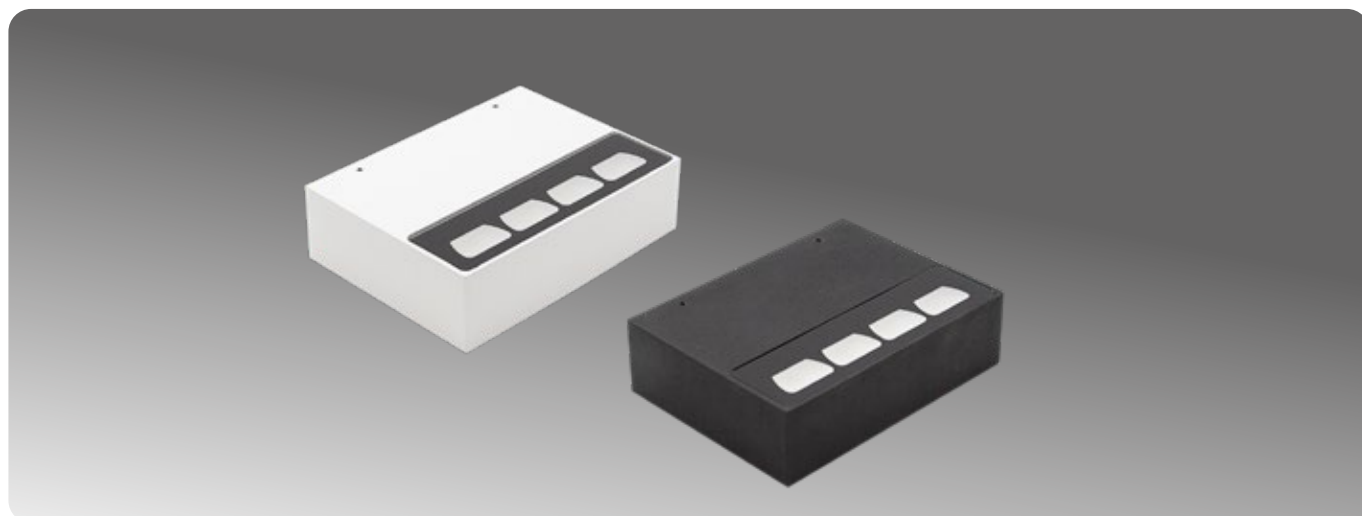

SPECIFICATIONS

DIMENSIONS	L160 x D120 x H45mm
CUT OUT	N/A - Surface Mount
COLOUR TEMP	Selectable 3000K Warm White (default factory setting) or 4000K Natural White
LUMENS	3000K Warm White 825lm 4000K Natural White 940lm
CRI	90+
LIFESPAN	>54,000 hours (L90)
BEAM ANGLE	180 x 25 degree beam
MATERIAL	Aluminium
IP RATING	IP65
DRIVER	TRIAC dimmable driver incorporated
ELECTRICAL CLASS	Class I luminaire, requires earth.
APPLICATION	Interior & Exterior Wall
WARRANTY	5 Year Warranty

INSTALLATION

U970 is designed to be used as an uplight and features a special asymmetric lens to achieve an even wash of light on the wall and ceiling. The 180 degree aspect gives it a nice even wash from wall to ceiling. The 25 degree aspect gives it the punch to wash extra high pitched or flat ceilings. Halcyon recommends installing no closer than 600mm to a flat or pitched ceiling for best results. Always aim to install with the bottom of the fitting above average eye height. The key with uplighting is correct positioning to find the balance between light intensity and light distribution. Too close to the ceiling and you will get a "hot spot" effect, too far and the fitting may be too low on the wall. In some circumstances it is also suitable to be used as a downlight. However, keep in mind this is the exact opposite of what this luminaire has been designed for so if installed downwards at an incorrect height it will throw light outwards directly into the viewers eye.

<940 LUMENS	12 WATTS	AC 240V
---------------------------	---------------------	--------------------



select CCT

AVAILABLE IN

DESCRIPTION	CODE
White 3000K/4000K "Select" Dual Colour	U970 W34
Black 3000K/4000K "Select" Dual Colour	U970 B34

