


Select 2ft, 4ft & 5ft
PRO Series IP Batten Dual CCT

LED500/1/2

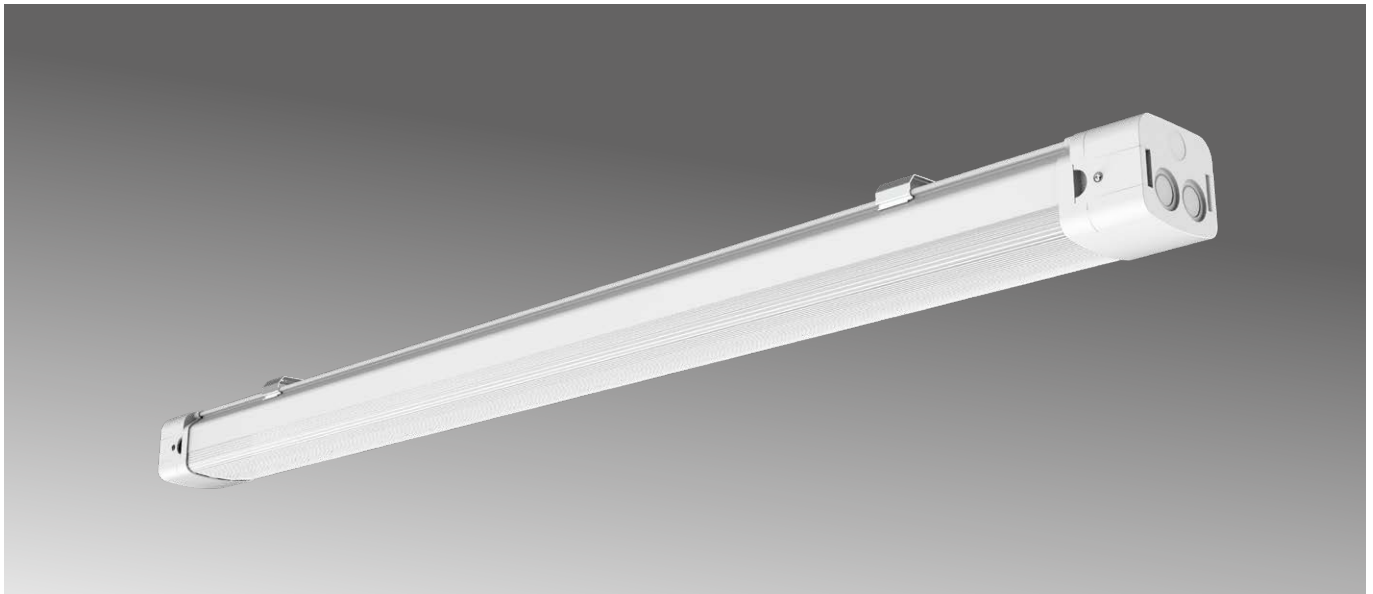

SPECIFICATIONS

DIMENSIONS	LED500: L603 x W83 x H71mm LED501: L1203 x W83 x H71mm LED502: L1503 x W83 x H71mm
COLOUR TEMP	Selectable 4000K Natural White or 6000K Daylight
CRI	90
LIFESPAN	50,000 Hours
BEAM ANGLE	120°
MATERIAL	PC, SECC
IP RATING	IP65
IMPACT RATING	IK08
TERMINATION	Dual end knockouts for cable entry/exit plus single end rear knockouts for rear cable entry. Pre wired terminal blocks at both ends. 2x cable entry glands supplied with each batten.
DRIVER	Flicker-free driver incorporated. Easily removable slide out modular gear tray for replacement/maintenance
CLASS	Class I luminaire, requires earth.
APPLICATION	Exterior general lighting. Suspended or surface mount.
POWER FACTOR	0.95
AMBIENT TEMP.	-20 ... +40°C
WEIGHT	LED500: 900g / LED501: 1750g / LED502: 2150g
WARRANTY	5 Year Warranty

AVAILABLE IN

DESCRIPTION	CODE
2ft, 18W, 4000K/6000K "Select" Dual Colour	LED500 W46XP
4ft, 36W, 4000K/6000K "Select" Dual Colour	LED501 W46XP
5ft, 45W, 4000K/6000K "Select" Dual Colour	LED502 W46XP

Sensor and Emergency options available

LED500

1900 LUMENS	18 WATTS	AC 240V
-----------------------	--------------------	-------------------

LED501

3750 LUMENS	36 WATTS	AC 240V
-----------------------	--------------------	-------------------

LED502

4700 LUMENS	45 WATTS	AC 240V
-----------------------	--------------------	-------------------

ACCESSORIES

Stainless Steel Cable Suspension Kit	LED500 ACS
--------------------------------------	------------

