


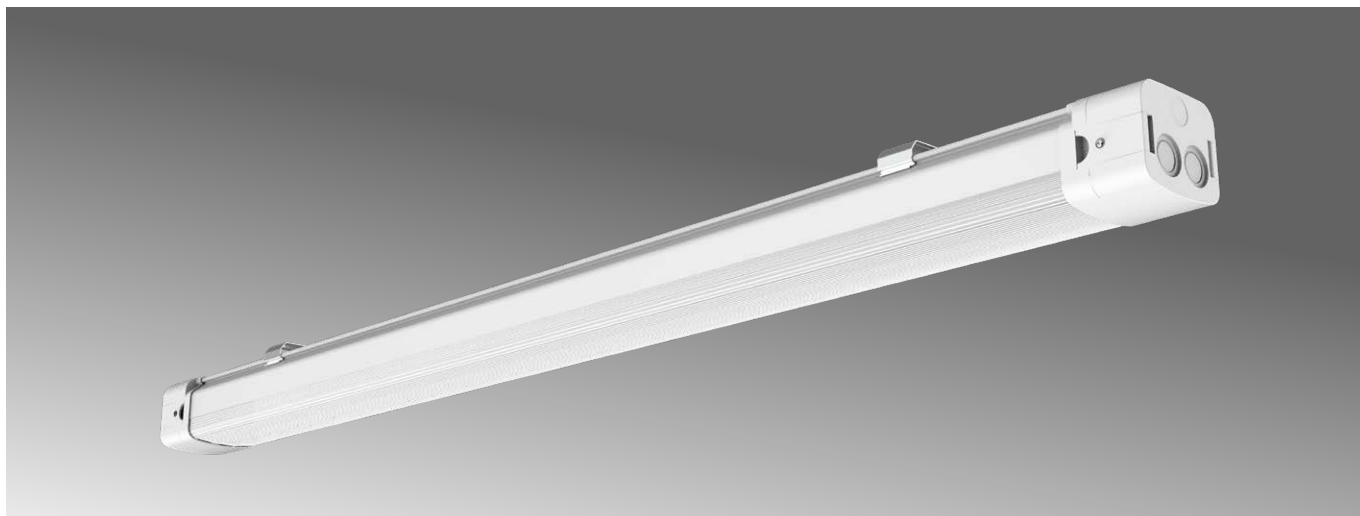

SPECIFICATIONS

DIMENSIONS	LED501: L1203 x W83 x H71mm LED502: L1503 x W83 x H71mm
COLOUR TEMP	Selectable 4000K Natural White or 6000K Daylight
CRI	90
LIFESPAN	50,000 Hours
BEAM ANGLE	120°
MATERIAL	PC, SECC
IP RATING	IP65
IMPACT RATING	IK08
TERMINATION	Dual end knockouts for cable entry/exit plus single end rear knockouts for rear cable entry. Pre wired terminal blocks at both ends. 2x cable entry glands supplied with each batten.
DRIVER	Flicker-free driver incorporated. Easily removable slide out modular gear tray for replacement/maintenance
CLASS	Class I luminaire, requires earth.
APPLICATION	Exterior general lighting. Suspended or surface mount.
POWER FACTOR	0.95
AMBIENT TEMP.	-20 ... +40°C
WEIGHT	2300g
SENSOR	Motion sensor version features master/slave configuration for grouping sensor and non-sensor battens. Default sensor factory settings: 100% detection area Hold time: 5 minutes Daylight Threshold: Disable
WARRANTY	5 Year Warranty

AVAILABLE IN

DESCRIPTION	CODE
4ft, 36W, 4000K/6000K "Select" Dual Colour, Sensor	LED501 W46XPMS
5ft, 45W, 4000K/6000K "Select" Dual Colour, Sensor	LED502 W46XPMS

Standard and Emergency options available

LED501

3750 LUMENS	36 WATTS	AC 240V
-----------------------	--------------------	-------------------

LED502

4700 LUMENS	45 WATTS	AC 240V
-----------------------	--------------------	-------------------


ACCESSORIES

Stainless Steel Cable Suspension Kit	LED500 ACS
Sensor Remote Control	LED500 SRC

SENSOR SPECIFICATIONS

DETECTION AREA	10mx6m(ØxH)
HOLD TIME	5s - 30min
DAYLIGHT THRESHOLD	2Lux / 10Lux / 30Lux / 50Lux / 80Lux / 120Lux / Disable

MASTER/SLAVE FUNCTION



NON DIMMABLE