


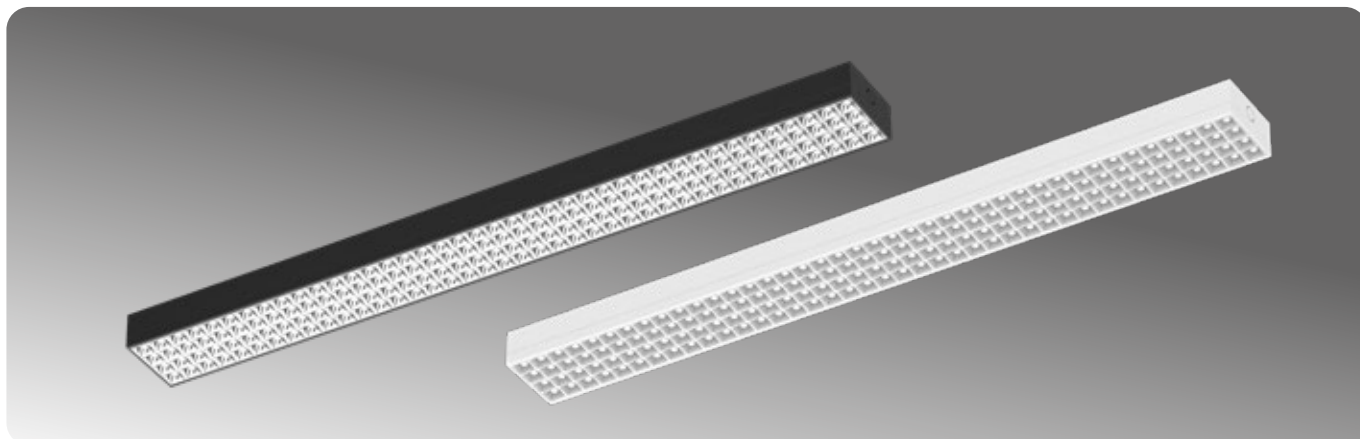

SPECIFICATIONS

DIMENSIONS	L1200 × W120 × H59mm
WATTAGE	Version 1: Selectable 25W, 30W, 35W or 40W (default factory setting) Version 2: Selectable 15W, 23W, 29W or 35W (default factory setting)
COLOUR TEMP	Selectable 3000K or 4000K (default factory setting)
LUMENS	White with white reflector (V1): 3000K: 25W/2920lm, 30W/3480lm, 35W/4100lm, 40W/4640lm or 4000K: 25W/3030lm, 30W/3570lm, 35W/4200lm, 40W/4730lm Black with silver reflector (V2): 3000K: 15W/1600lm, 23W/2300lm, 29W/3000lm, 35W/3680lm or 4000K: 15W/1680lm, 23W/2410lm, 29W/3150lm, 35W/3860lm
CRI	95 (R9 <98)
LIFESPAN	54,000 hours (L70 B50)
UGR	Halcyon Pro Spec battens are suitable for installations requiring UGR of less than 19.
BEAM ANGLE	80°
BINNING	3-Step SDCM
FINISH	White RAL9016 / Black RAL9005
MATERIAL	Aluminium + PC
IP RATING	IP20
IK RATING	IK08
TERMINATION	Multiple rear termination points, knockouts at both ends for alternative installation methods
DRIVER	Incorporated, adjustable output non-dimmable flicker free driver
ELECTRICAL CLASS	Class I luminaire, requires earth.
APPLICATION	Interior education, commercial, office lighting
POWER FACTOR	0.9
OPERATING TEMP	-20°C - 45°C
WEIGHT	3.03kg
WARRANTY	5 Year Warranty

<4730
LUMENS<40
WATTSAC
240V

AVAILABLE IN

DESCRIPTION	CODE
4ft, White with white reflector, "Select" 3000K/4000K, "Select" 25W-40W Adjustable Output Non-Dimmable driver	LED541 W34
4ft, Black with silver reflector, "Select" 3000K/4000K, "Select" 15W-35W Adjustable Output Non-Dimmable driver	LED541 B34V2


Note: Dali Dimmable versions also available

select W

select CCT

ACCESSORIES

DESCRIPTION	CODE
1.5m Adjustable Suspension Kit (2 pack)	LED540 SUSP
Adaptor for Continuous Surface Mount Installation	LED540 SMS
White Adaptor for Continuous Suspended Installation	LED540 SUSSW
Black Adaptor for Continuous Suspended Installation	LED540 SUSSB
White Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRW
Black Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRB

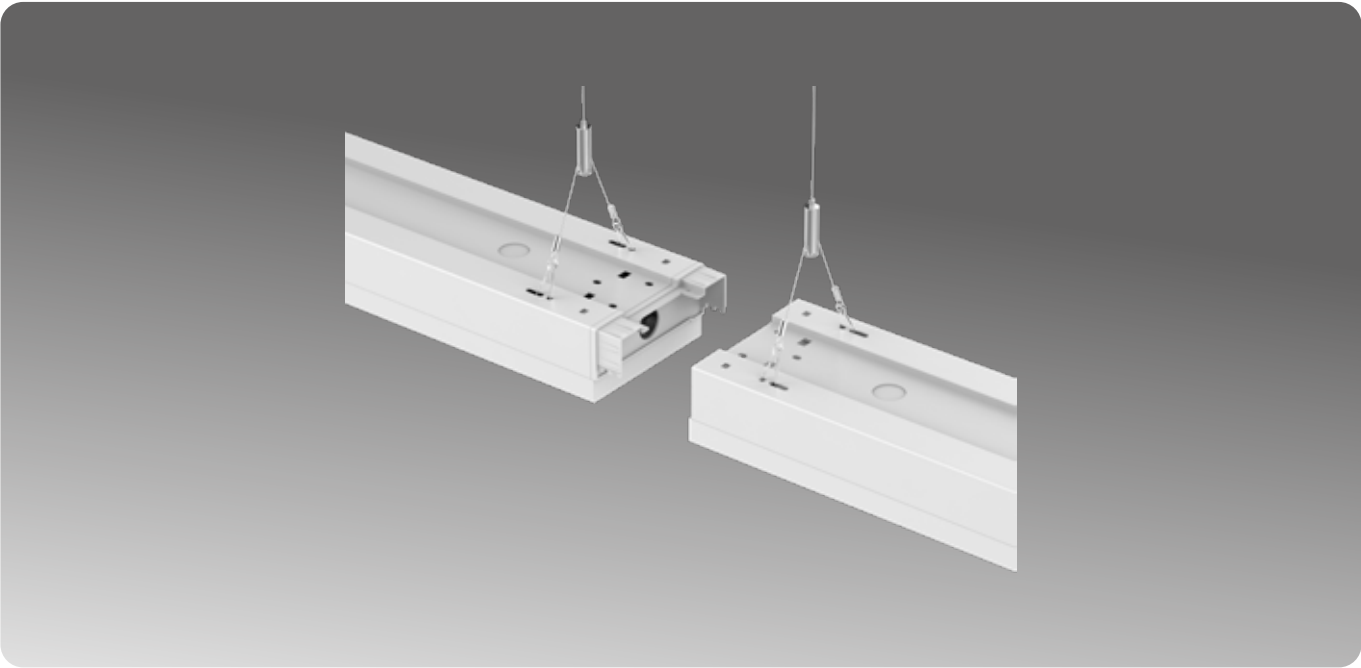


SUSPENSION KIT

DESCRIPTION	CODE
1.5m Adjustable Suspension Kit (2 pack)	LED540 SUSP



SPLICE KIT FOR CONTINUOUS INSTALLATION

DESCRIPTION	CODE
Adaptor for Continuous Surface Mount Installation	LED540 SMS
White Adaptor for Continuous Suspended Installation	LED540 SUSSW
Black Adaptor for Continuous Suspended Installation	LED540 SUSSB

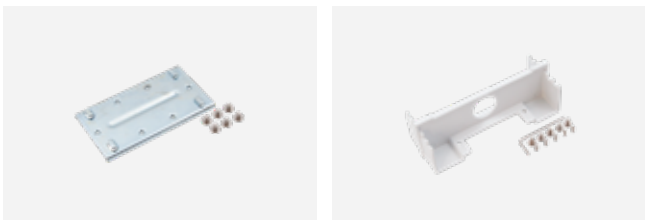

CEILING ROSE

DESCRIPTION	CODE
White Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRW
Black Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRB



4ft Joinable Multi-Function Batten
Pro Spec UGR <19 Select 3K/4K Quad Wattage

LED541

