


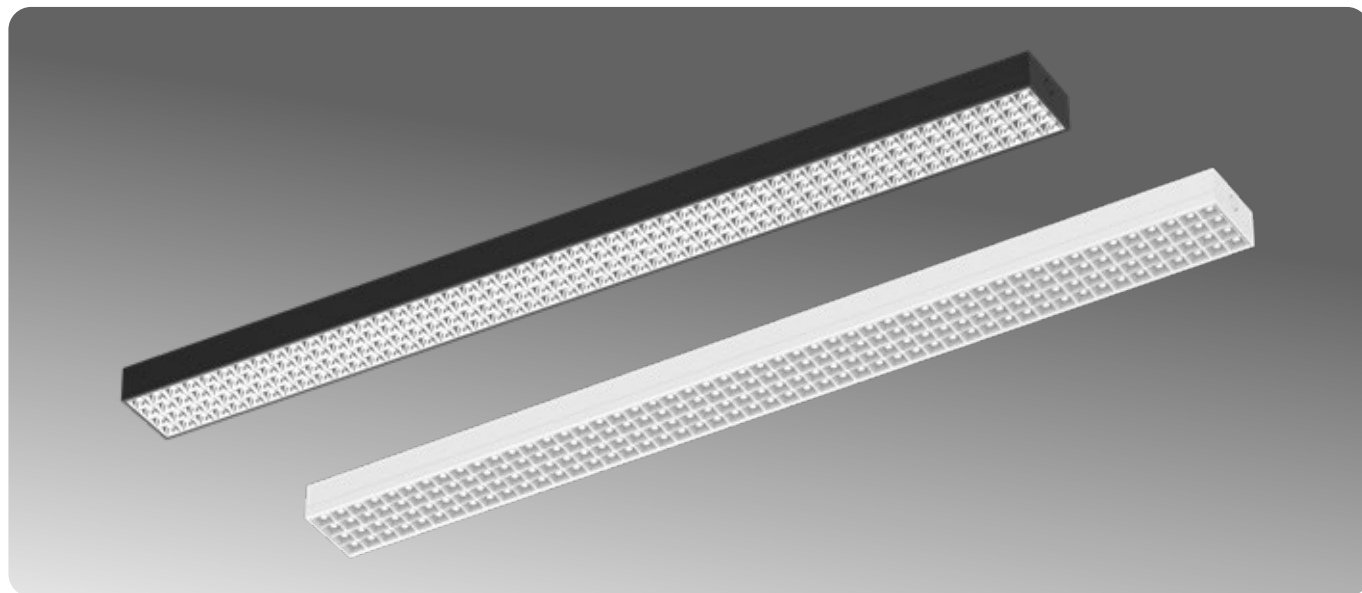

SPECIFICATIONS

DIMENSIONS	L1500 × W120 × H59mm
WATTAGE	Selectable 35W, 40W, 45W, 50W (default factory setting)
COLOUR TEMP	Selectable 3000K or 4000K (default factory setting)
LUMENS	White with white reflector: 3000K: 35W-50W/4115lm-5740lm 4000K: 35W-50W/4225lm-5850lm Black with silver reflector: 3000K: 35W-50W/4035lm-5675lm 4000K: 35W-50W/4160lm-5875lm
CRI	95 (R9 <98)
LIFESPAN	54,000 hours (L70 B50)
UGR	Halcyon Pro Spec battens are suitable for installations requiring UGR of less than 19.
BEAM ANGLE	80°
BINNING	3-Step SDCM
FINISH	White RAL9016 / Black RAL9005
MATERIAL	Aluminium + PC
IP RATING	IP20
IK RATING	IK08
TERMINATION	Multiple rear termination points, knockouts at both ends for alternative installation methods
DRIVER	Incorporated, adjustable output non-dimmable flicker free driver
ELECTRICAL CLASS	Class I luminaire, requires earth.
APPLICATION	Interior education, commercial, office lighting
POWER FACTOR	0.9
OPERATING TEMP	-20°C - 45°C
WEIGHT	3.63kg
WARRANTY	5 Year Warranty

<5875
LUMENS<50
WATTSAC
240V

AVAILABLE IN

DESCRIPTION	CODE
5ft, White with white reflector, "Select" Dual Colour, "Select" 35W-50W Adjustable Output Non-Dimmable driver	LED542 W34
5ft, Black with silver reflector, "Select" Dual Colour, "Select" 35W-50W Adjustable Output Non-Dimmable driver	LED542 B34


Note: Dali Dimmable versions also available

select W

select CCT

ACCESSORIES

DESCRIPTION	CODE
1.5m Adjustable Suspension Kit (2 pack)	LED540 SUSP
Adaptor for Continuous Surface Mount Installation	LED540 SMS
White Adaptor for Continuous Suspended Installation	LED540 SUSSW
Black Adaptor for Continuous Suspended Installation	LED540 SUSSB
White Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRW
Black Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRB

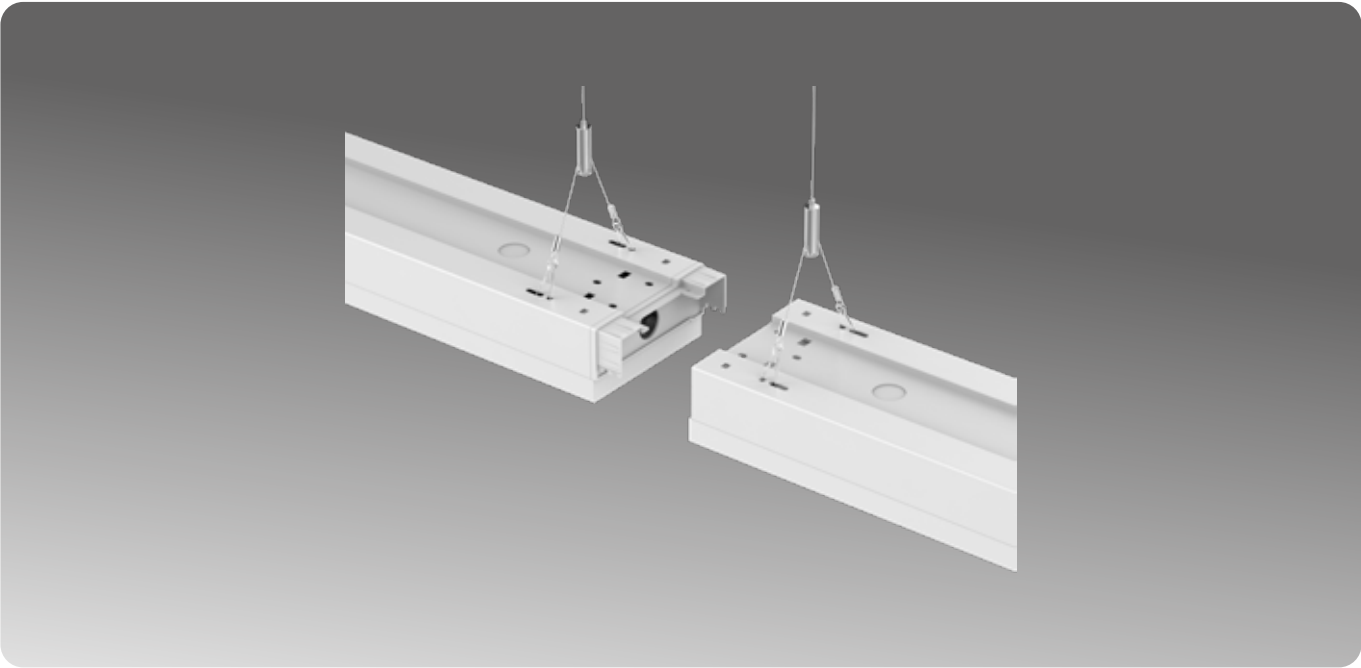


SUSPENSION KIT

DESCRIPTION	CODE
1.5m Adjustable Suspension Kit (2 pack)	LED540 SUSP



SPLICE KIT FOR CONTINUOUS INSTALLATION

DESCRIPTION	CODE
Adaptor for Continuous Surface Mount Installation	LED540 SMS
White Adaptor for Continuous Suspended Installation	LED540 SUSSW
Black Adaptor for Continuous Suspended Installation	LED540 SUSSB

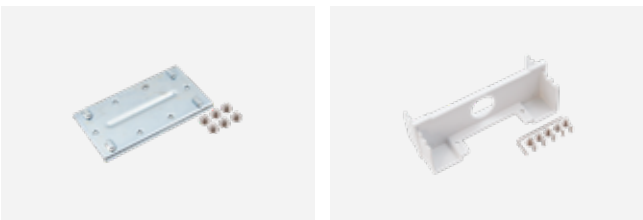

CEILING ROSE

DESCRIPTION	CODE
White Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRW
Black Ceiling Rose D100mm x H25mm (Supplied with 1700mm feed cable pre-wired, transparent)	LED540 CRB



5ft Joinable Multi-Function Batten
Pro Spec UGR <19 Select 3K/4K Quad Wattage

LED542

