


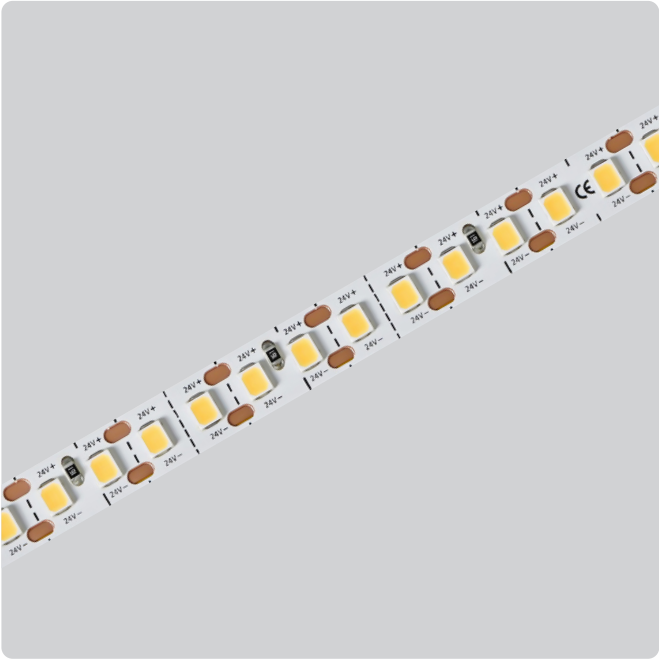


LT-TFP-15W 15W/m <2030lm/m

15
W/m

<2030
lm/m

65
IP

24V
CV



Cut Increments
Free-cut (1mm increments)

Tape Width
8mm

Tape Height
1.5mm

Specifications

Input	24V DC Constant Voltage
Wattage/m	14.4W
Colour Temp	2700K, 3000K or 4000K
CRI	90
Lumens/m	1660lm@2700K, 1960lm@3000K, 2030lm@4000K
Lifespan	60,000hrs (L80 B50)
Binning	SDCM2
Beam Angle	120°
Diodes/m	160
Current Draw/m	0.6A
Max Run	<10m, see installation sheet
Mounting	Supplied with 3M adhesive backing
IP Rating	IP65 (Nano coating, for interior applications only)
Driver	Sold separately, specify according to wattage/current x length
Application	Interior
Warranty	5 Year Warranty

Available In

Description	Code
5m Kits	
3000K (ea)	LT-TFP-15W-3K-N-K5
4000K (ea)	LT-TFP-15W-4K-N-K5
10m Kits	
3000K (ea)	LT-TFP-15W-3K-N-K10
4000K (ea)	LT-TFP-15W-4K-N-K10
25m Kits	
3000K (ea)	LT-TFP-15W-3K-N-K25
4000K (ea)	LT-TFP-15W-4K-N-K25
Custom Length	
2700K (m)	LT-TFP-15W-27K-N
3000K (m)	LT-TFP-15W-3K-N
4000K (m)	LT-TFP-15W-4K-N



Trade Flex Pro series is available in either pre-assembled DIY kits or custom lengths. Kits are supplied complete with assorted accessories, additional bulk accessories can be purchased separately (see Feeds & Joins - Quick Connect).

5m Kits Include

- 5m Strip Reel
- 10m Feed Cable Reel
- 6x Feed Connectors
- 2x Join Connectors
- 2x L Connectors

10m Kits Include

- 10m Strip Reel
- 10m Feed Cable Reel
- 10x Feed Connectors
- 6x Join Connectors
- 3x L Connectors

25m Kits Include

- 25m Strip Reel
- 25m Feed Cable Reel
- 12x Feed Connectors
- 12x Join Connectors
- 6x L Connectors

