
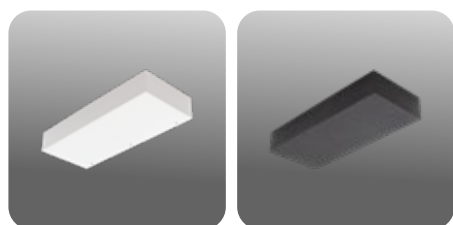


Surface Mount UpLight

Fixed Slim Select 3K/4K Asymmetric 296mm

U971

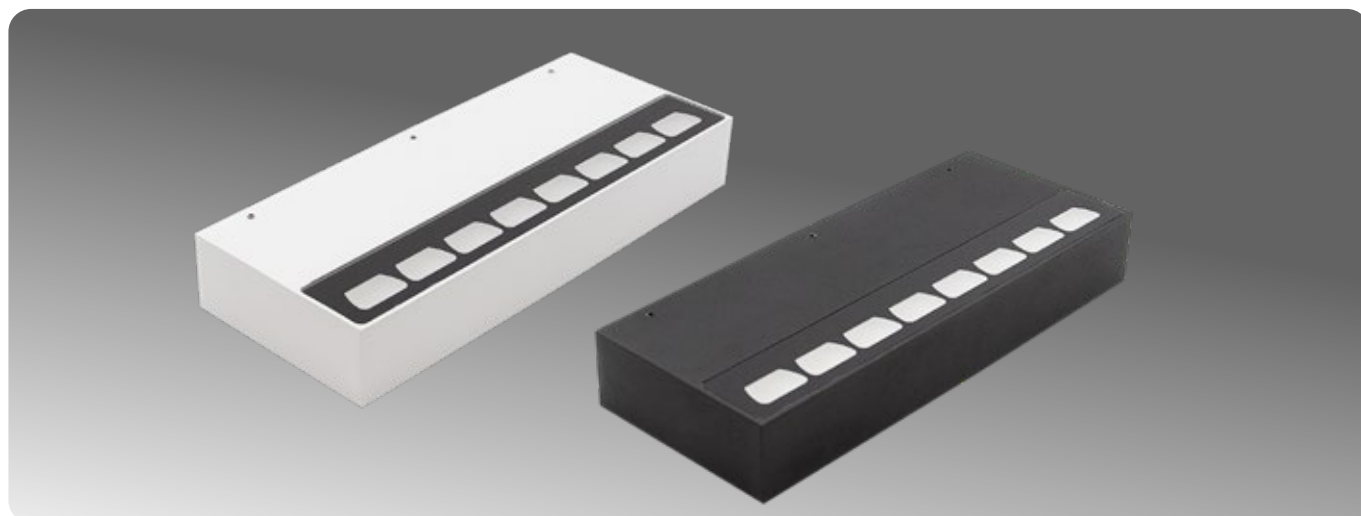

SPECIFICATIONS

DIMENSIONS	L296 x D120 x H45mm
CUT OUT	N/A - Surface Mount
COLOUR TEMP	Selectable 3000K Warm White or 4000K Natural White
LUMENS	3000K Warm White 1920lm 4000K Natural White 2100lm
CRI	90+
LIFESPAN	>54,000 hours (L90)
BEAM ANGLE	180 x 25 degree beam
MATERIAL	Aluminium
IP RATING	IP65
DRIVER	TRIAC dimmable driver incorporated
ELECTRICAL CLASS	Class I luminaire, requires earth.
APPLICATION	Interior & Exterior Wall
WARRANTY	5 Year Warranty

INSTALLATION

U971 is designed to be used as an uplight and features a special asymmetric lens to achieve an even wash of light on the wall and ceiling. The 180 degree aspect gives it a nice even wash from wall to ceiling. The 25 degree aspect gives it the punch to wash extra high pitched or flat ceilings. Halcyon recommends installing no closer than 600mm to a flat or pitched ceiling for best results. Always aim to install with the bottom of the fitting above average eye height. The key with uplighting is correct positioning to find the balance between light intensity and light distribution. Too close to the ceiling and you will get a "hot spot" effect, too far and the fitting may be too low on the wall. In some circumstances it is also suitable to be used as a downlight. However, keep in mind this is the exact opposite of what this luminaire has been designed for so if installed downwards at an incorrect height it will throw light outwards directly into the viewers eye.

<2100 LUMENS	28 WATTS	AC 240V
------------------------	-----------------	----------------

	Dimmable driver incorporated
--	------------------------------


AVAILABLE IN

Dual CCT Select 3K/4K

DESCRIPTION	CODE
White 3000K/4000K "Select" Dual Colour	U971 W34
Black 3000K/4000K "Select" Dual Colour	U971 B34

3000K Fixed CCT (End of line)

DESCRIPTION	CODE
White 3000K	U971 W3



SIDE VIEW