
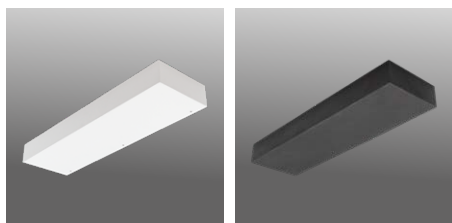


U972

Surface Mount UpLight 42W Fixed Slim Asymmetric 432mm

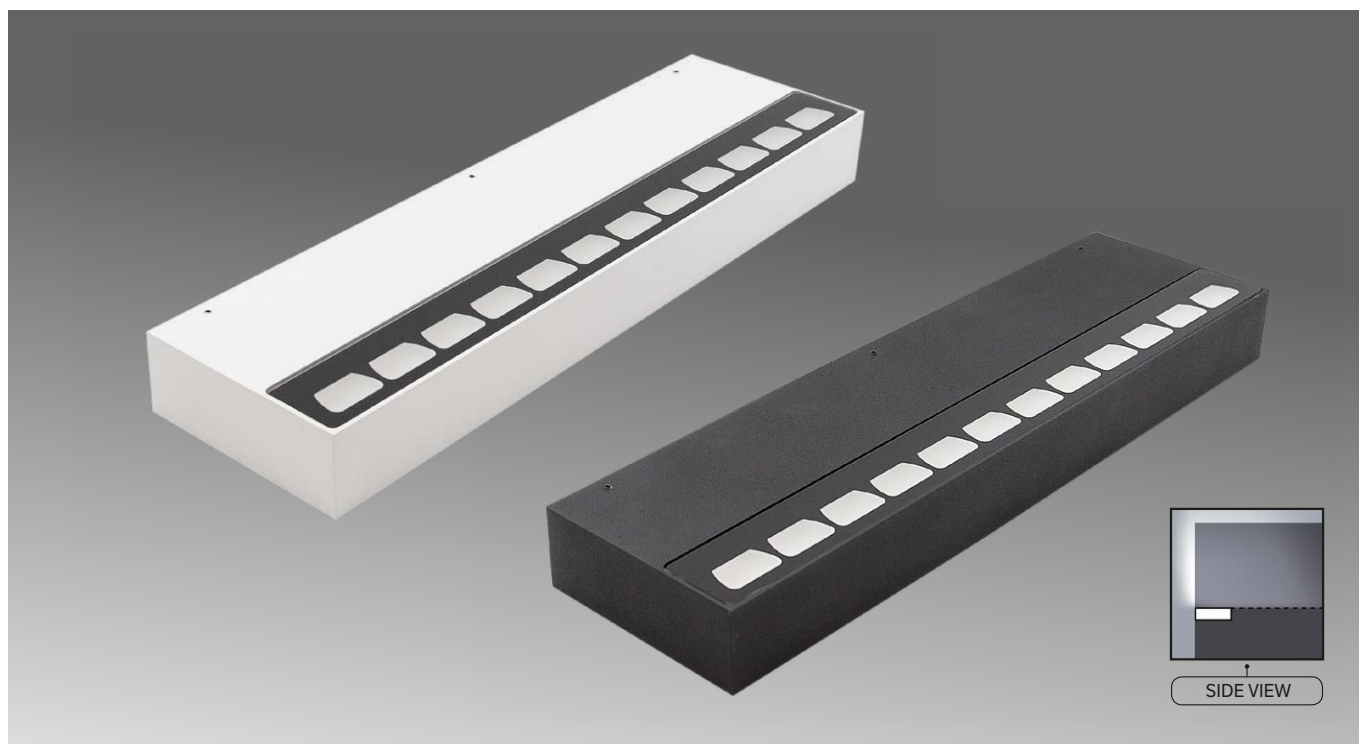

SPECIFICATIONS

DIMENSIONS	L432 x D120 x H45mm
CUT OUT	N/A - Surface Mount
COLOUR TEMP	3000K Warm White
CRI	90+
LIFESPAN	50,000 Hours
BEAM ANGLE	180 x 25 degree beam
MATERIAL	Aluminium
IP RATING	IP65
DRIVER	TRIAC Dimmable Driver Incorporated
APPLICATION	Interior & Exterior Wall
WARRANTY	5 Year Warranty

**3000
LUMENS**
**42
WATTS**
**AC
240V**

 Dimmable driver
incorporated

AVAILABLE IN

DESCRIPTION	CODE
White 3000K	U972 W3
Black 3000K	U972 B3

INSTALLATION

U972 is designed to be used as an uplight and features a special asymmetric lens to achieve an even wash of light on the wall and ceiling. The 180 degree aspect gives it a nice even wash from wall to ceiling. The 25 degree aspect gives it the punch to wash extra high pitched or flat ceilings. Halcyon recommends installing no closer than 600mm to a flat or pitched ceiling for best results. Always aim to install with the bottom of the fitting above average eye height. The key with uplighting is correct positioning to find the balance between light intensity and light distribution. Too close to the ceiling and you will get a "hot spot" effect, too far and the fitting may be too low on the wall. In some circumstances it is also suitable to be used as a downlight. However, keep in mind this is the exact opposite of what this luminaire has been designed for so if installed downwards at an incorrect height it will throw light outwards directly into the viewers eye.