




X25 Mini Standard Single Beam




X31 Mini Standard Single Beam




X26 Mini Eyelid

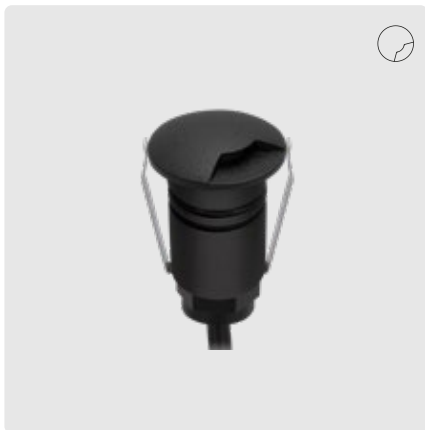


X27 Mini 1-Way

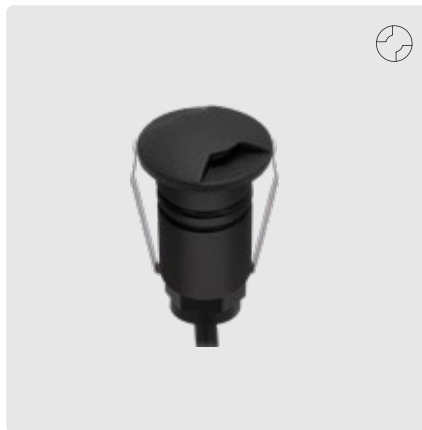


X28 Mini 2-Way

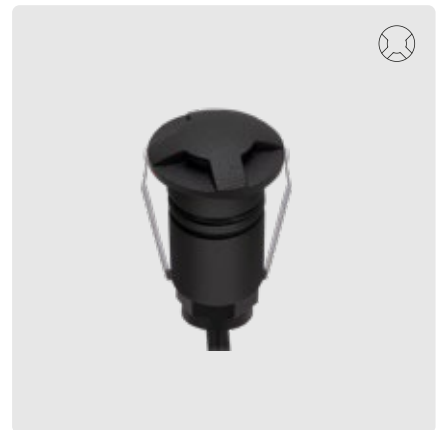

X29 Mini 3-Way

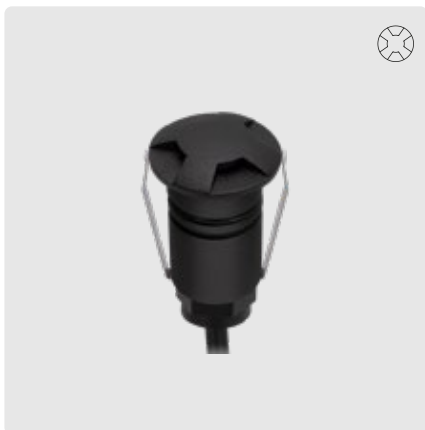

X30 Mini 4-Way

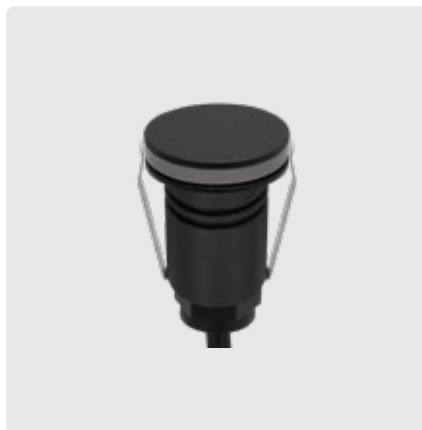


X32 Mini Halo

Exterior X25 series is available in Black 316 STS, Polished 316 STS or Copper in 2700K, 3000K, 4000K and RGBW with multiple beam angle options the Mini X25 series can be configured and customised to your precise requirements. Inground installation housings, DIY style plug and play extension cable and socket accessories available.

Specifications

Watts	1W
Input	8-25V DC Variable Voltage (Non Dim), 24V DC Constant Voltage (RGBW)
Dimensions	X25: D25 x H41mm, X26 X27 X28 X29 X30 X32: D25 x H45mm X31: L25 x W25 x H41mm
Cut Out	Ø19mm
Colour Temp	2700K, 3000K, 4000K or RGBW
Lumens	<60lm
CRI	>80
Lifespan	40,000hrs (L80 B10)
Beam Angle	17°, 36°, 360° or ambient light source
Material	316 Stainless Steel or Copper
IP Rating	IP67
IK Rating	IK10
Clearance	0mm clearance required
Classification	IC-F Rated
Driver	Sold separately
Dimming/Control	Non-dimmable
Application	Exterior or interior, multi-use
Weight Capacity	<2000kg
Complete With	500mm feed cable. Single colour pre-wired with quick connect IP67 plug. See wiring accessories for compatible extensions/sockets. RGBW not compatible with quick connect accessories.
Warranty	5 Year Warranty

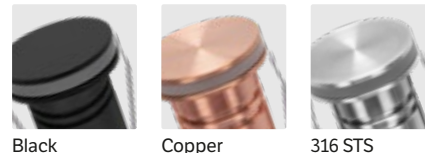

Black

Copper

316 STS

Wiring Accessories

Suitable for single colour fittings only, not compatible with RGBW.

Description	Code
1m Feed Cable	X25-FC1M
10m Feed Cable	X25-FC10M
1.5m Loop/Extension Cable	X25-LC1.5M
3m Loop/Extension Cable	X25-LC3M
5m Loop/Extension Cable	X25-LC5M
10m Loop/Extension Cable	X25-LC10M
Two Way Spot Socket	X25-S2
Three Way Spot Socket	X25-S3



Feed Cable




Loop/Extension Cable



Two Way Spot Socket

Housing Accessories

Description	Code
In-wall Installation Sleeve. D22 x H50mm (Cut out: Ø23mm)	X25-IWS



X25-IWS

Variable Voltage Technology

Non-dimmable options are powered by a 8-25V DC module. Suitable for use with 12V or 24V DC power supplies or long circuits with a high volt drop.

Available In

Model	- Finish	Colour Temp	- Beam Angle
X25 (Round) X26 (Eyelid) X31 (Square)	- B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K 3K = 3000K 4K = 4000K RGBW = RGB + 3000K	- 17D = 17° beam 36D = 36° beam
X27 (1-way) X28 (2-way) X29 (3-way) X30 (4-way)	- B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K 3K = 3000K 4K = 4000K RGBW = RGB + 3000K	
X32 (Halo)	- B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K	

Example code = X25-STS3K-36D (Round mini standard single beam up or down, 316 STS, 3000K, 36° beam).