

**X55**

Standard Single Beam

**X61**

Standard Single Beam

**X56**


Eyelid

**X57**

1-Way

**X58**

2-Way

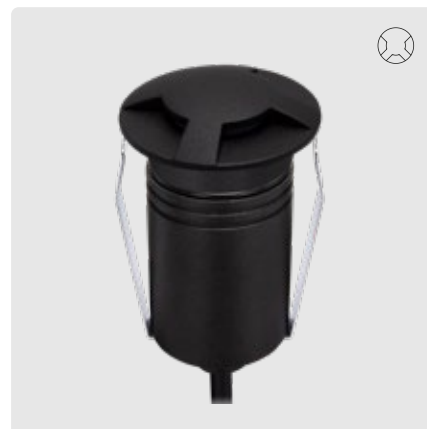**X59**

3-Way

**X60**

4-Way


**X62**

Halo

Exterior X55 series is available in Black 316 STS, Polished 316 STS or Copper in 2700K, 3000K, 4000K and RGBW with multiple beam angle options the Small X55 series can be configured and customised to your precise requirements. Inground installation housings, DIY style plug and play extension cable and socket accessories available.

Specifications

Watts	2.5W
Input Voltage	10-25V DC Variable Voltage (Non Dim), 24V DC Constant Voltage (Dim, RGBW)
Dimensions	X55: D55 x H82mm X61: L55 x W55 x H82mm X56 X57 X58 X59 X60 X62: D55 x H90mm
Cut Out	Ø43mm
Colour Temp	2700K, 3000K, 4000K or RGBW
Lumens	<170lm
CRI	>80
Lifespan	40,000hrs (L80 B10)
Beam Angle	19°, 36°, 60°, 360° or 20x40°
Material	316 Stainless Steel or Copper
IP Rating	IP67
IK Rating	IK10
Clearance	0mm, zero clearance required
Classification	IC-F Rated
Driver	Sold separately
Dimming/Control	Non-dimmable or Dimmable (Phase cut)
Application	Exterior or interior, multi-use
Weight Capacity	<2000kg
Complete With	500mm feed cable. Single colour pre-wired with quick connect IP67 plug. See wiring accessories for compatible extensions/ sockets. RGBW not compatible with quick connect accessories.
Warranty	5 Year Warranty

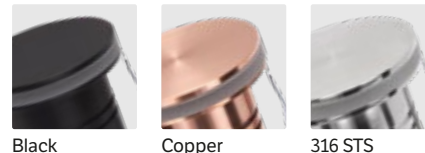

Black

Copper

316 STS

Wiring Accessories

Suitable for single colour fittings only, not compatible with RGBW.

Description	Code
1m Feed Cable	EX110 FC1M
10m Feed Cable	EX110 FC10M
1.5m Loop/Extension Cable	EX110 LC1.5M
2m Loop/Extension Cable	EX110 LC2M
3m Loop/Extension Cable	EX110 LC3M
5m Loop/Extension Cable	EX110 LC5M
10m Loop/Extension Cable	EX110 LC10M
Two Way Spot Socket	EX110 S2
Three Way Spot Socket	EX110 S3



Feed Cable




Loop/Extension Cable



Two Way Spot Socket

Housing Accessories

Description	Code
X55-X62 In-wall Installation Sleeve. D47 x H95mm (Cut out: Ø48mm)	X55-IWS
X55-X62 Inground Installation Housing. D88 x H97mm (Cut out: Ø90mm)	X55-IGH



X55-IGH

Variable Voltage Technology

Non-dimmable options are powered by a 10-25V DC module. Suitable for use with 12V or 24V DC power supplies or long circuits with a high volt drop.

Available In

Model	-	Finish	Colour Temp	-	Dimmable	-	Beam Angle	-	Optional
X55 (Round) X56 (Eyelid) X61 (Square)	-	B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K 3K = 3000K 4K = 4000K RGBW = RGB + 3000K	-	= Non-dim D = Dimmable	-	19D = 19° beam 36D = 36° beam 60D = 60° beam DIFF = Frosted Diffuser ASY = Asymmetric 20x40°	-	HC = Honeycomb LSL = Linear Spread
X57 (1-way) X58 (2-way) X59 (3-way) X60 (4-way)	-	B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K 3K = 3000K 4K = 4000K RGBW = RGB + 3000K	-	= Non-dim D = Dimmable				
X62 (Halo)	-	B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K						

Example code = X55-STS3K-D-36D-HC (Round standard single beam, 316 STS, 3000K, dimmable, 36°, Honeycomb lens).