Exterior Inground Uplight
Round Small



SPECIFICATIONS


COLOUR TEMP	*2700K*
INPUT VOLTAGE	*24V DC*
CRI	*80*
LIFESPAN	*40,000 hours*
BEAM ANGLE	*Low Glare - N/A*
FRONT FACE	*316 Stainless Steel*
GLASS TYPE	*Step Tempered Glass T=7mm*
IP RATING	*IP67*
IK RATING	*IK08*
DRIVER	*Remote Driven, Sold separately 24V DC Non-Dimmable*
APPLICATION	*Exterior inground*
WORKING TEMP	*-20˚ to 40˚C*
WEIGHT CAPACITY	*< 1704kg*
COMPLETE WITH	*ABS Plastic Installation Sleeve (A08)*
WARRANTY	*5 Year Warranty*

40 LUMENS | **3×0.43** WATTS | **24V** PARALLEL



Driver sold separately, specify when ordering.

DIMENSIONS

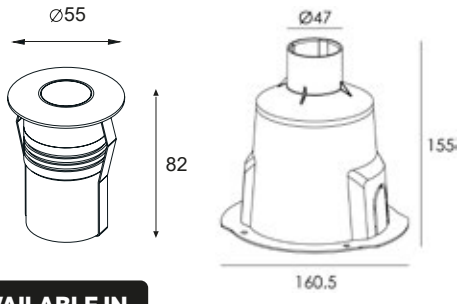

INSTALLATION NOTES

1/ Take pride with installation. All cable joints must be Resin or IP68 type. Standard crimps, terminal blocks and PVC tape are not suitable cable joining methods and will cause luminaire failure from water tracking up into fitting.
2/ When installing in concrete always install over a drained substrate. Incorrect installation will result in water ingress and luminaire failure from water pooling in base. ***Warranty is void when installed directly into dirt.***
3/ Halcyon recommends using a Constant Voltage driver approximately double the wattage of the circuit load due to inrush current which can momentarily exceed the maximum amperage of the driver if the driver output is not high enough relative to the load. The inrush current may trigger the self-protection/ reset function of the driver causing the circuit to flash on and off repeatedly.

AVAILABLE IN

DESCRIPTION	CODE
316 STS 2700K Low Glare	EX320-LSTSL2