


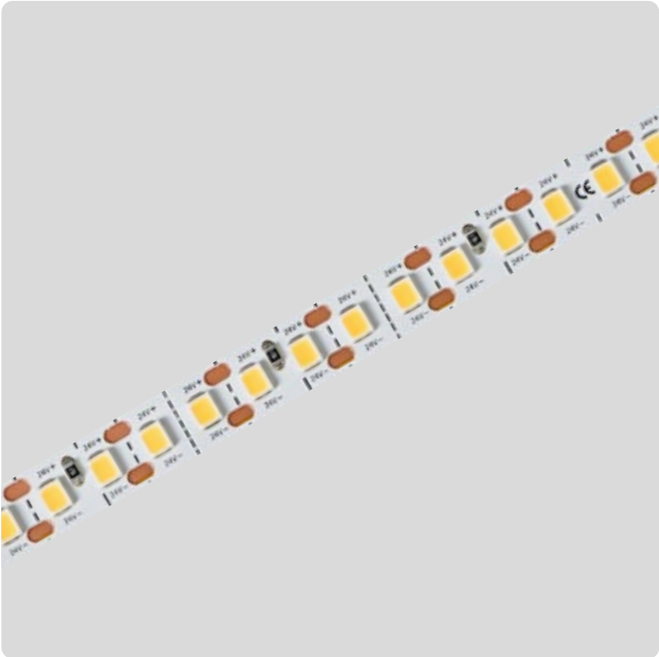


LT-TFP-10W 10W/m <1390lm/m

10
W/m

<1390
lm/m

65
IP

24V
CV



Cut Increments
Free-cut (1mm increments)

Tape Width
8mm

Tape Height
1.5mm

Specifications

Input	24V DC Constant Voltage
Wattage/m	9.6W
Colour Temp	2700K, 3000K or 4000K
CRI	90
Lumens/m	1250lm@2700K, 1335lm@3000K, 1390lm@4000K
Lifespan	60,000hrs (L80 B50)
Binning	SDCM2
Beam Angle	120°
Diodes/m	160
Current Draw/m	0.4A
Max Run	<10m, see installation sheet
Mounting	Supplied with 3M adhesive backing
IP Rating	IP65 (Nano coating, for interior applications only)
Driver	Sold separately, specify according to wattage/current x length
Application	Interior
Warranty	5 Year Warranty

Available In

Description	Code
5m Kits	
3000K (ea)	LT-TFP-10W-3K-N-K5
4000K (ea)	LT-TFP-10W-4K-N-K5
10m Kits	
3000K (ea)	LT-TFP-10W-3K-N-K10
4000K (ea)	LT-TFP-10W-4K-N-K10
25m Kits	
3000K (ea)	LT-TFP-10W-3K-N-K25
4000K (ea)	LT-TFP-10W-4K-N-K25
Custom Length	
2700K (m)	LT-TFP-10W-27K-N
3000K (m)	LT-TFP-10W-3K-N
4000K (m)	LT-TFP-10W-4K-N



Trade Flex Pro series is available in either pre-assembled DIY kits or custom lengths. Kits are supplied complete with assorted accessories, additional bulk accessories can be purchased separately (see Feeds & Joins - Quick Connect).

5m Kits Include

- 5m Strip Reel
- 10m Feed Cable Reel
- 6x Feed Connectors
- 2x Join Connectors
- 2x L Connectors

10m Kits Include

- 10m Strip Reel
- 10m Feed Cable Reel
- 10x Feed Connectors
- 6x Join Connectors
- 3x L Connectors

25m Kits Include

- 25m Strip Reel
- 25m Feed Cable Reel
- 12x Feed Connectors
- 12x Join Connectors
- 6x L Connectors

Feeds & Joins

Quick Connect

Quick connect feeds, joins and connectors for on site assembly and installation (As included in 5m, 10m and 15m kits).

Feed Connectors

8mm

Description	Code
12pcs	LT-F-CON-8MM-12P
50pcs	LT-F-CON-8MM-50P

Join Connectors

8mm

Description	Code
12pcs	LT-J-CON-8MM-12P
50pcs	LT-J-CON-8MM-50P

L Connectors

8mm

Description	Code
6pcs	LT-J-LCON-8MM-6P
50pcs	LT-J-LCON-8MM-50P

Feed Cable

2 Core

Description	Code
500mm	LT-F-CAB-500MM
500mm (10pcs)	LT-F-CAB-500MM-10P



LT-F-CON



LT-J-LCON

Custom

Made to order professionally soldered feeds and joins performed by Halcyon technicians.

Standard Feeds

2 Core (Red/Black)

Description	Code
300mm	LTF-STD
1000mm	LTF-1000
3000mm	LTF-3000
5000mm	LTF-5000
10000mm	LTF-10000
12000mm	LTF-12000




LTF

Standard Joins

2 Core (Red/Black)

Description	Code
30mm	LTJ-STD
100mm	LTJ-100
1000mm	LTJ-1000
3000mm	LTJ-3000
5000mm	LTJ-5000
10000mm	LTJ-10000



LTJ


Pendant Feeds

2 Core (Clear Cable)


Description	Code
500mm	LTFCL-STD
1000mm	LTFCL-1000
3000mm	LTFCL-3000
5000mm	LTFCL-5000

Compatible Profile Examples


LT-TFP-10W Linear Strip is most commonly used with the following profiles. See Aluminium Profile specification sheets for the complete range.




XS1608 Ultra Shallow




XR2508 Ultra Shallow



XS1613 Mini Standard



XR2513 Mini Standard



XS2222 Corner Mount

Compatible Controllers

Pair Linear Strip with wireless control accessories such as Casambi or Basic RF for increased functionality and control.

