



**M40-T5**

Type 5 - Dark Art Adjustable Spot

**Watts** 6.5W / 200mA

**Lumens** <590lm

**Beam** 36°

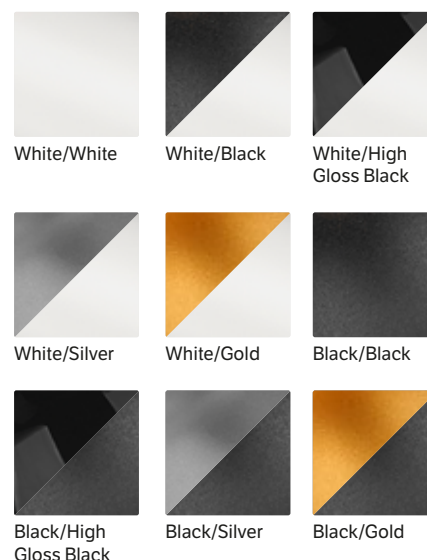
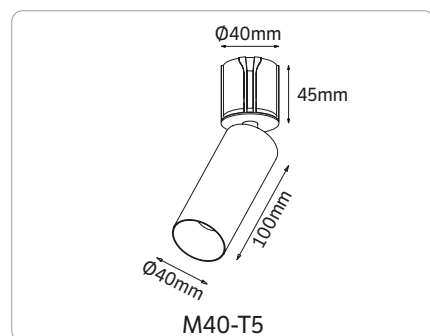
**Tilt/Rotate** 90°/355°







**Specifications**

|          |                                                           |
|----------|-----------------------------------------------------------|
| CCT      | 3000K                                                     |
| Binning  | SDCM 2                                                    |
| Lifespan | 105,000hrs (L90 B10)                                      |
| UGR      | Suitable for installations requiring UGR of less than 19. |

|                |                 |
|----------------|-----------------|
| Aluminium      | Aluminium       |
| CRI            | 97              |
| IP Rating      | IP43            |
| Classification | IC Rated        |
| Driver         | Sold separately |
| Warranty       | 5 Year Warranty |

**Dimensions****Step 1: Choose Installation Frame**

See pages 130-131 for frame details

|            |  |  |  |  |  |  |
|------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|            | <b>Recessed Round</b>                                                               | <b>Recessed Oval Double</b>                                                         | <b>Recessed Square</b>                                                              | <b>Recessed Rectangular Double</b>                                                   | <b>Trimless</b>                                                                       | <b>Surface</b>                                                                        |
| Dimensions | Ø63 x H50mm                                                                         | L116 x W63 x H50mm                                                                  | L63 x W63 x H50mm                                                                   | L116 x W63 x H50mm                                                                   | Ø105 x H52mm                                                                          | L170 x W60 x H60mm                                                                    |
| Cut Out    | Ø57mm                                                                               | 2x Ø57mm @53mm centres                                                              | Ø57mm                                                                               | 2x Ø57mm @53mm centres                                                               | Ø85mm                                                                                 | -                                                                                     |
| White Code | F40-RR-W                                                                            | F40-RR2-W                                                                           | F40-RSQ-W                                                                           | F40-RSQ2-W                                                                           | F40-TL-R                                                                              | SF40-RR-W                                                                             |
| Black Code | F40-RR-B                                                                            | F40-RR2-B                                                                           | F40-RSQ-B                                                                           | F40-RSQ2-B                                                                           |                                                                                       | SF40-RR-B                                                                             |

**Step 2: Choose Module Type**

| Model | Type | Trim/Body Colour       | Reflector Colour                                                   | CCT | Beam  |
|-------|------|------------------------|--------------------------------------------------------------------|-----|-------|
| M40   | - T5 | - W (White), B (Black) | W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold) | 3K  | - 36D |

**Step 3: Select your Driver**

|        | TRIAC Dimmable             | Dali                       | Casambi                                                                              |
|--------|----------------------------|----------------------------|--------------------------------------------------------------------------------------|
| M40-T5 | DCC120200-DMS-5W8W @ 200mA | DCC150700-DDM-612W @ 200mA | DCC150500-CAS-712W @ 180mA<br>(does not fit through cutout, ceiling access required) |

**Configuration Example:** For a Recessed Single M40-T5 Dark Art Adjustable Spot in White with a Gold Reflector and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F40-RR-W (2) Light Module: M40-T5-WG3K-36D (3) Dimmable Driver: DCC120200-DMS-5W8W.