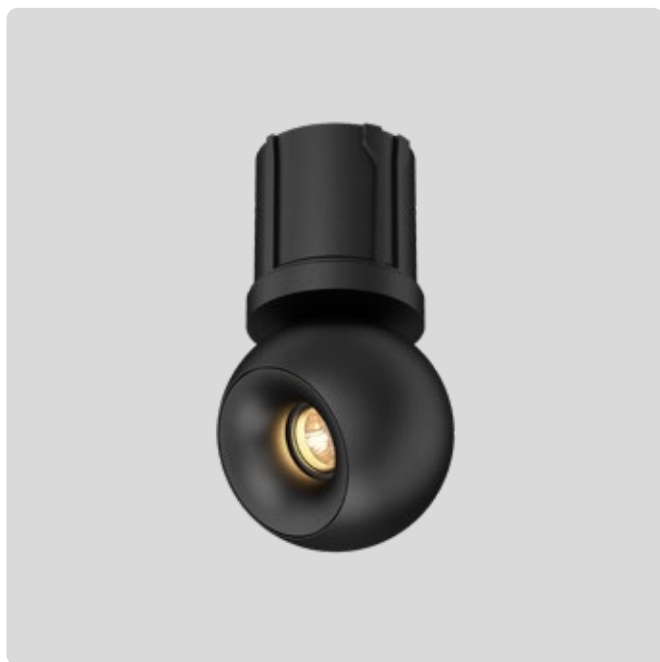




M60-T15 Type 15 - Dark Art Adjustable Sphere

Watts 9W / 260mA DC

Lumens <800lm

Beam 55°

Tilt 60° **Rotate** 355°



M60 Type 15 with
Recessed Round Frame



M60 Type 15 with
Trimless Frame



M60-T16 Type 16 - Dark Art Adjustable Sphere

Watts 12W / 350mA DC

Lumens <1050lm

Beam 55°

Tilt 60° **Rotate** 355°



M60 Type 16 with
Recessed Round Frame

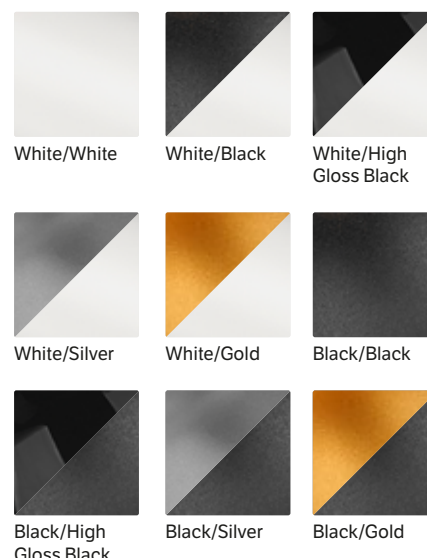
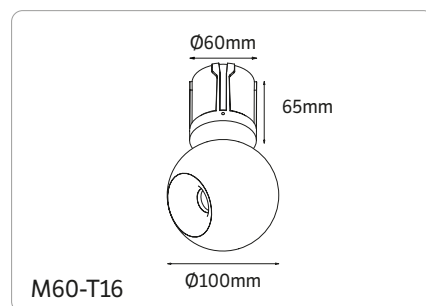
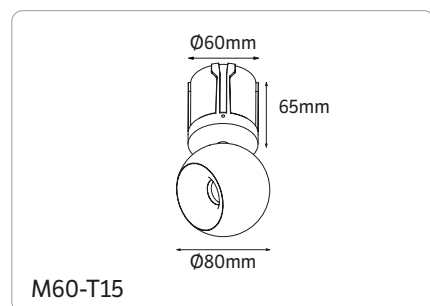


M60 Type 16 with
Trimless Frame



**Specifications**

CCT	2700K or 3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

**Dimensions****Step 1: Choose Installation Frame**

See pages 168-169 for frame details

**Recessed Round****Recessed Square****Trimless****Surface Cylinder**

Dimensions	Ø81 x H60mm	L81 x W81 x H60mm	Ø130 x H58mm	Ø85 x H130mm**
Cut Out	Ø75mm	Ø75mm	Ø105mm	-
White Code	F60-RR-W	F60-RSQ-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RSQ-B		SF60-RR-B

**Remote driver only, driver cannot be installed inside surface frame.

Step 2: Choose Module Type

Model	Type	Trim/Body Colour	Reflector Colour	CCT	Beam
M60	T15	W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	27K (2700K), 3K (3000K)	- 55D
M60	T16	W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	27K (2700K), 3K (3000K)	- 55D

Step 3: Select your Driver

	Phase-cut Dimmable	Dali	Casambi
M60-T15	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA
M60-T16	DCC350-DX-20W	DCC260700-DD-1625W @ 350mA	DCC150500-CAS-712W @ 350mA

Configuration Example: For a Recessed Single M60-T15 Dark Art Adjustable Spot in White with a Silver Reflector and a Phase-cut Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F60-RR-W (2) Light Module: M60-T15-WS3K-55D (3) Dimmable Driver: DCC260-DX-12W.



F60-RR

Recessed Round

Dimensions Ø81 x H60mm

Cut Out Ø75mm

White Code F60-RR-W

Black Code F60-RR-B



F60-RR2

Recessed Oval Double

Dimensions L153 x W81 x H60mm

Cut Out 2x 75mm @ 72mm centres

White Code F60-RR2-W

Black Code F60-RR2-B



F60-RSQ

Recessed Square

Dimensions L81 x W81 x H60mm

Cut Out Ø75mm

White Code F60-RSQ-W

Black Code F60-RSQ-B



F60-RSQ2

Recessed Rectangular Double

Dimensions L153 x W81 x H60mm

Cut Out 2x 75mm @ 72mm centres

White Code F60-RSQ2-W

Black Code F60-RSQ2-B



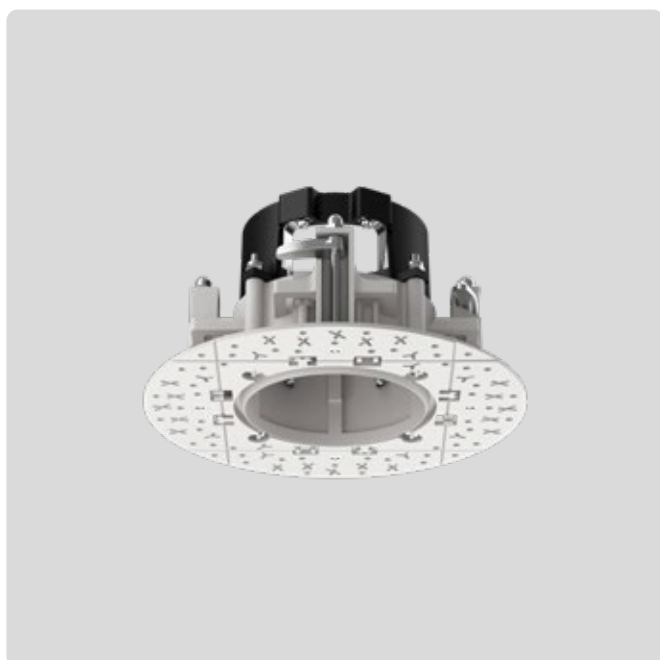
SF60-RR

Surface Cylinder

Dimensions Ø85xH130mm

White Code SF60-RR-W

Black Code SF60-RR-B



F60-TL-R

Trimless

Dimensions Ø130xH58mm

Cut Out Ø105mm

Code F60-TL-R