



M60 Type 19-XL with
Recessed Round Frame



M60 Type 19-XL
with Trimless Frame

M60-T19-XL Type 19 - Dark Art Adjustable Spot

Watts 17W / 500mA DC **Lumens** <1430lm

Beam 45° **Tilt/Rotate** 90°/355°





M60 Type 21 with
Trimless Frame

M60-T21 Type 21 - Adjustable Spot


Watts 25W / 700mA DC **Lumens** 2500lm

Beam 55° **Tilt/Rotate** 90°/355°


Specifications

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.


Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

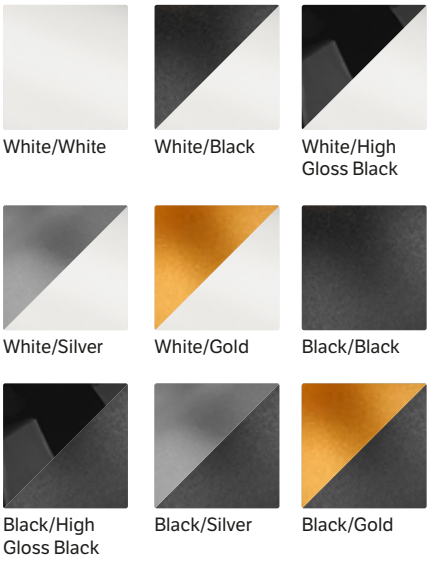

Dimensions

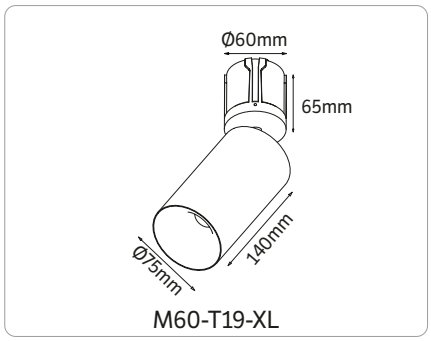

M60-T19-XL

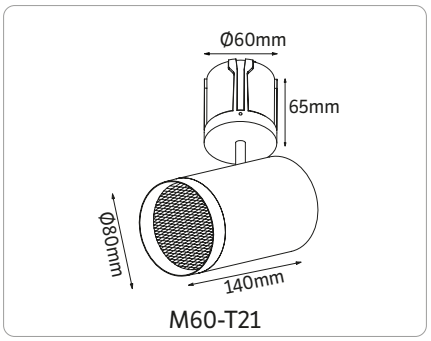

M60-T21

Step 1: Choose Installation Frame

See pages 166-167 for frame details



	Recessed Round	Recessed Oval Double	Recessed Square	Recessed Rectangular Double	Trimless	Surface Cylinder
Dimensions	Ø81 x H60mm	L153 x W81 x H60mm	L81 x W81 x H60mm	L153 x W81 x H60mm	Ø130xH58mm	Ø85xH130mm
Cut Out	Ø75mm	2x 75mm @ 72mm centres	Ø75mm	2x 75mm @ 72mm centres	Ø105mm	-
White Code	F60-RR-W	F60-RR2-W	F60-RSQ-W	F60-RSQ2-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RR2-B	F60-RSQ-B	F60-RSQ2-B		SF60-RR-B

Step 2: Choose Module Type

Model	- Type	- Trim/Body Colour	Reflector Colour	CCT	- Beam
M60	- T19-XL	- W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 45D
M60	- T21	- W (White), B (Black)		3K	- 55D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M60-T19-XL	DCC500-DX-20W	DCC260700-DD-1625W @ 500mA	DCC260700-CAS-1325W @ 500mA (does not fit through cutout, ceiling access required)
M60-T21	DCC700-DX-30W	DCC260700-DD-1625W @ 700mA	DCC260700-CAS-1325W @ 700mA (does not fit through cutout, ceiling access required)

Configuration Example: For a Recessed Single M60-T19-XL Dark Art Adjustable Spot in White with a Silver Reflector and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F60-RR-W (2) Light Module: M60-T19-XL-WS3K-45D (3) Dimmable Driver: DCC500-DX-20W.