



M60-T25 Type 25 - Dark Art Pendant Spot

Watts 9W / 260mA DC **Lumens** <800lm

Beam 55°





M60-T26 Type 26 - Dark Art Pendant Spot


Watts 12W / 350mA DC **Lumens** <1050lm

Beam 55°


Specifications

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.


Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

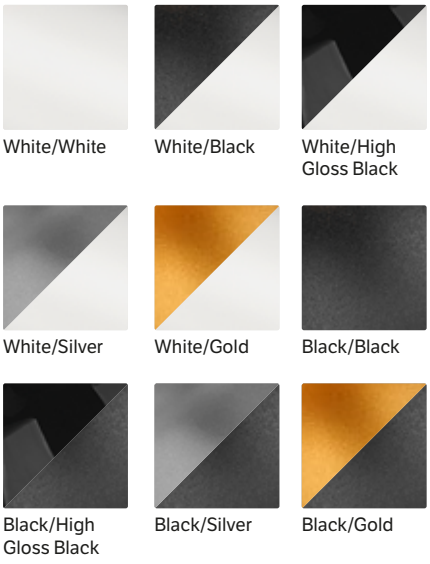

Dimensions

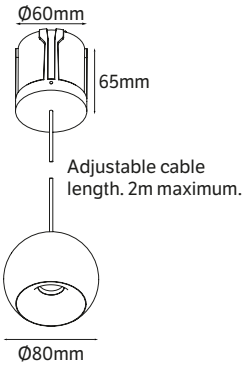

M60-T25

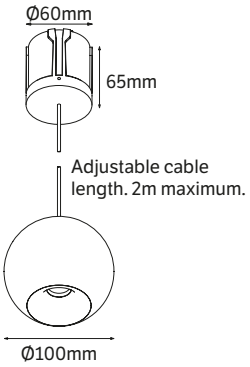

M60-T26

Pendants

M60 Pendants are compatible with all M60 trimless, recessed and surface mount frames.



Step 1: Choose Installation Frame

See pages 166-167 for frame details



	Recessed Round	Recessed Oval Double	Recessed Square	Recessed Rectangular Double	Trimless	Surface Cylinder
Dimensions	Ø81 x H60mm	L153 x W81 x H60mm	L81 x W81 x H60mm	L153 x W81 x H60mm	Ø130xH58mm	Ø85xH130mm
Cut Out	Ø75mm	2x 75mm @ 72mm centres	Ø75mm	2x 75mm @ 72mm centres	Ø105mm	-
White Code	F60-RR-W	F60-RR2-W	F60-RSQ-W	F60-RSQ2-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RR2-B	F60-RSQ-B	F60-RSQ2-B		SF60-RR-B

Step 2: Choose Module Type

Model	- Type	- Trim/Body Colour	Reflector Colour	CCT	- Beam
M60	- T25	- W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 55D
M60	- T26	- W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 55D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M60-T25	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA
M60-T26	DCC350-DX-20W	DCC260700-DD-1625W @ 350mA	DCC150500-CAS-712W @ 350mA

Configuration Example: For a Recessed Single M60-T25 Dark Art Pendant Spot in White with a Silver Reflector and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F60-RR-W (2) Light Module: M60-T25-WS3K-55D (3) Dimmable Driver: DCC260-DX-12W.