



M60 Type 1 with
Recessed Round Frame



M60 Type 1 with
Trimless Frame

M60-T1 Type 1 - Dark Art Adjustable


Watts 6.5W / 200mA DC **Lumens** 540lm

Beam 55° **Tilt/Rotate** 20°/355°





M60 Type 3 with
Recessed Round Frame

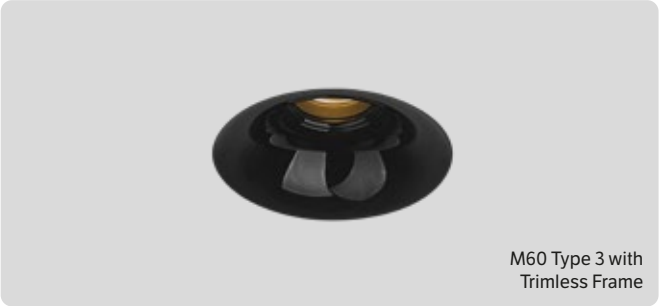

M60 Type 3 with
Trimless Frame

M60-T3 Type 3 - Dark Art Fixed


Watts 9W / 260mA DC **Lumens** <750lm

Beam 45°


Specifications

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.


Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

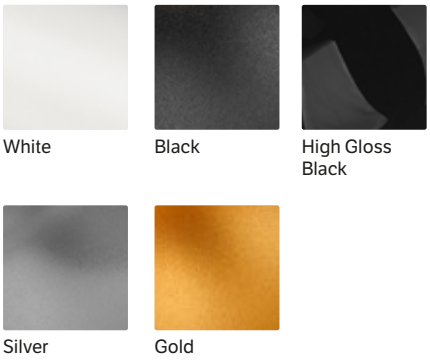

Dimensions

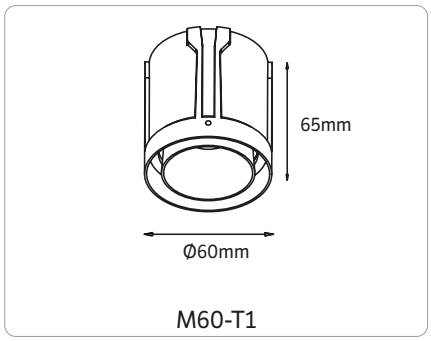


M60-T1

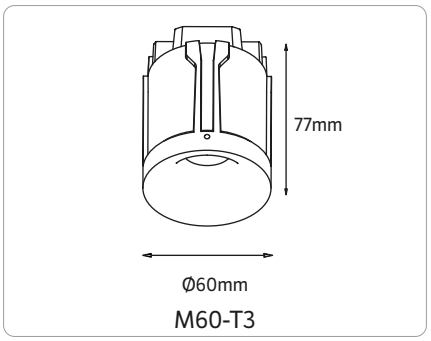

M60-T3

Step 1: Choose Installation Frame

See pages 166-167 for frame details

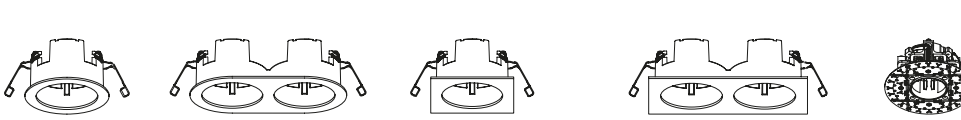

	Recessed Round	Recessed Oval Double	Recessed Square	Recessed Rectangular Double	Trimless	Surface Cylinder
Dimensions	Ø81 x H60mm	L153 x W81 x H60mm	L81 x W81 x H60mm	L153 x W81 x H60mm	Ø130xH58mm	Ø85xH130mm
Cut Out	Ø75mm	2x 75mm @ 72mm centres	Ø75mm	2x 75mm @ 72mm centres	Ø105mm	-
White Code	F60-RR-W	F60-RR2-W	F60-RSQ-W	F60-RSQ2-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RR2-B	F60-RSQ-B	F60-RSQ2-B		SF60-RR-B

Step 2: Choose Module Type

Model	- Type	- Reflector Colour	CCT	- Beam
M60	- T1	- WW (White), BB (Black)	3K	- 55D
M60	- T3	- W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 45D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M60-T1	DCC120200-DMS-5W8W @ 200mA	DCC150700-DDM-612W @ 200mA	DCC150500-CAS-712W @ 180mA
M60-T3	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA

Configuration Example: For a Trimless Single M60-T1 Dark Art Adjustable in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F60-TL-R (2) Light Module: M60-T1-WW3K-55D (3) Dimmable Driver: DCC120200-DMS-5W8W.