



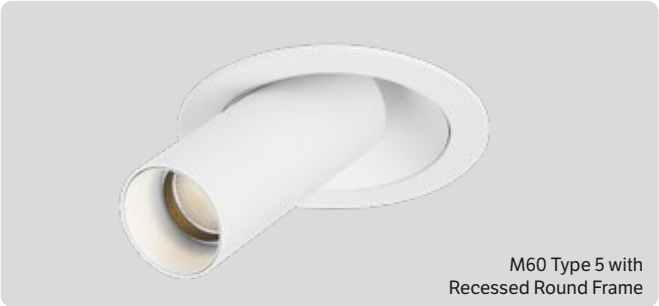

M60 Type 5 with
Recessed Round Frame

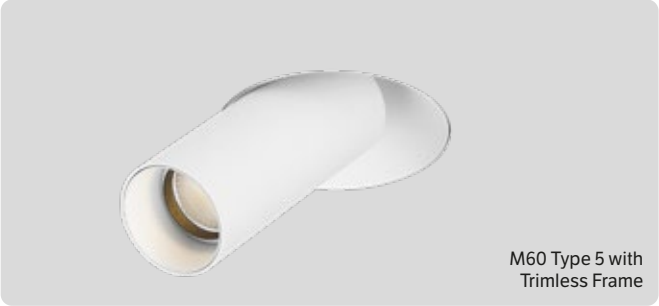


M60 Type 5 with
Trimless Frame

M60-T5 Type 5 - Adjustable Spot

Watts 6.5W / 200mA DC **Lumens** <500lm

Beam 36° **Tilt/Rotate** 40° / 355°



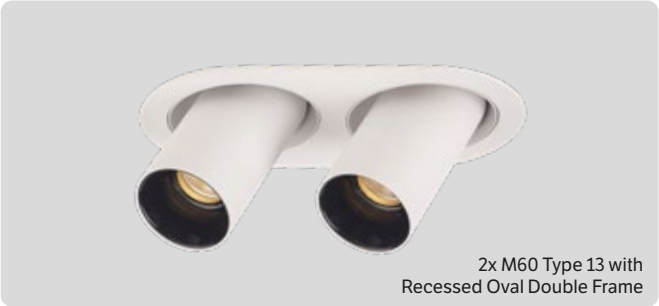

2x M60 Type 13 with
Recessed Oval Double Frame



M60 Type 13 with
Recessed Round Frame

M60-T13 Type 13 - Dark Art Adjustable Spot


Watts 6.5W / 200mA DC **Lumens** <590lm

Beam 55° **Tilt/Rotate** 40°/355°


Specifications

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.


Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

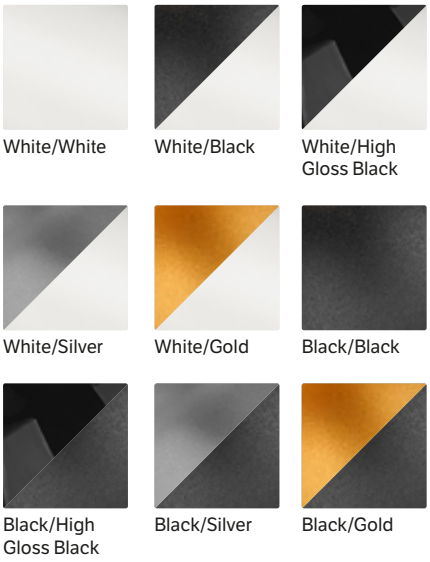

Dimensions



M60-T5



M60-T13

Step 1: Choose Installation Frame

See pages 166-167 for frame details



	Recessed Round	Recessed Oval Double	Recessed Square	Recessed Rectangular Double	Trimless	Surface Cylinder
Dimensions	Ø81 x H60mm	L153 x W81 x H60mm	L81 x W81 x H60mm	L153 x W81 x H60mm	Ø130xH58mm	Ø85xH130mm
Cut Out	Ø75mm	2x 75mm @ 72mm centres	Ø75mm	2x 75mm @ 72mm centres	Ø105mm	-
White Code	F60-RR-W	F60-RR2-W	F60-RSQ-W	F60-RSQ2-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RR2-B	F60-RSQ-B	F60-RSQ2-B		SF60-RR-B

Step 2: Choose Module Type

Model - Type	- Trim/Body Colour	Reflector Colour	CCT - Beam
M60 - T5	- W (White), B (Black)		3K - 36D
M60 - T13	- W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K - 55D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M60-T5	DCC200350-DX-815W @ 200mA	DCC150700-DDM-612W @ 200mA	DCC150500-CAS-712W @ 180mA
M60-T13	DCC200350-DX-815W @ 200mA	DCC150700-DDM-612W @ 200mA	DCC150500-CAS-712W @ 180mA

Configuration Example: For a Trimless Single M60-T5 Adjustable Spot in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F60-TL-R (2) Light Module: M60-T5-W3K-36D (3) Dimmable Driver: DCC200350-DX-815W.