
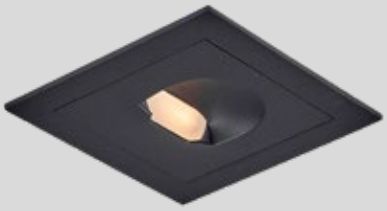





M61 Type 3
with Recessed Frame



M61 Type 3 with
Trimless Square Frame

M61-T3 Type 3 - Square Wallwasher

Watts 9W / 260mA DC **Lumens** 560lm

Beam 60˚

Specifications


CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

White


Black






Dimensions



M61-T3

Step 1: Choose Installation Frame

See pages 176-177 for frame details

	Recessed Square	Recessed Rectangular Double	Trimless Square	Trimless Rectangular Double	Surface Square Box
Dimensions	L82 x W82 x H52mm	L144 x W82 x H52mm	L130 x W130 x H55mm	L179 x W74 x H60mm	L78 x W78 x H125mm
Cut Out	75 x 75mm	135 x 75mm	105 x 105mm	140 x 75mm	-
White Code	F61-SQ-W	F61-SQ2-W	F61-TL-SQ	F61-TL-SQ2	SF61-SQ-W
Black Code	F61-SQ-B	F61-SQ2-B			SF61-SQ-B

Step 2: Choose Module Type

Model	- Type	- Trim/Body Colour	CCT
M61	- T3	- W (White), B (Black)	3K

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M61-T3	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA

Configuration Example: For a Recessed Single M61-T3 Square Wallwasher in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F61-SQ-W (2) Light Module: M61-T3-W3K (3) Dimmable Driver: DCC260-DX-12W.