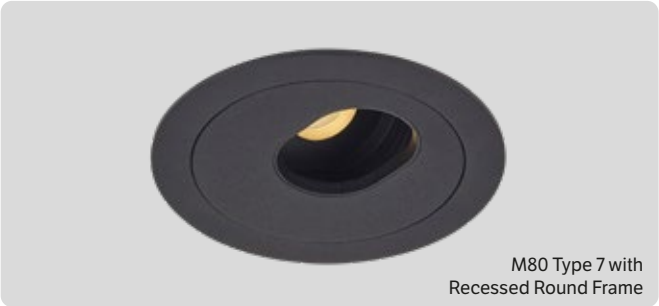




M80 Type 7 with
Recessed Round Frame



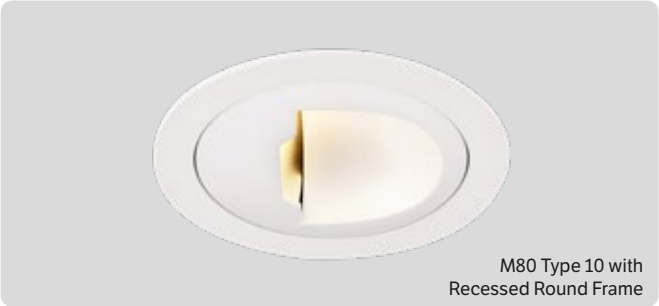
M80 Type 7 with
Trimless Frame

**M80-T7** Type 7 - Adjustable Highlighter

**Watts** 9W / 260mA DC **Lumens** 650lm

**Beam** 36° **Tilt** 30° **Rotate** 355°





M80 Type 10 with
Recessed Round Frame



M80 Type 10 with
Trimless Frame

**M80-T10** Type 10 - Wallwasher

**Watts** 12W / 350mA DC **Lumens** <900lm

**Beam** 40°

## Specifications


| | |
|---|---|
| CCT | 3000K |
| Binning | SDCM 2 |
| Lifespan | 105,000hrs (L90 B10) |
| UGR | Suitable for installations requiring UGR of less than 19. |

| | |
|---|---|
| Material | Aluminium |
| CRI | 97 |
| IP Rating | IP43 |
| Classification | IC Rated |
| Driver | Sold separately |
| Warranty | 5 Year Warranty |



White


Black

## Dimensions








M80-T7



M80-T10

## Step 1: Choose Installation Frame

See pages 202-203 for frame details

| |  Recessed Round |  Recessed Oval Double |  Recessed Square |  Recessed Rectangular Double |  Trimless |  Surface Cylinder |
|---|---|---|---|---|---|---|
| Dimensions | Ø102 x H62mm | L192 x W102 x H62mm | L102 x W102 x H62mm | L192 x W102 x H62mm | Ø170 x H68mm | Ø106 x H146mm |
| Cut Out | Ø95mm | 2x 95mm @ 90mm centres | Ø95mm | 2x 95mm @ 90mm centres | Ø130mm | - |
| White Code | F80-RR-W | F80-RR2-W | F80-RSQ-W | F80-RSQ2-W | F80-TL-R | SF80-RR-W |
| Black Code | F80-RR-B | F80-RR2-B | F80-RSQ-B | F80-RSQ2-B | - | SF80-RR-B |

## Step 2: Choose Module Type

| Model | - Type | - Trim/Body Colour | CCT | - Beam |
|---|---|---|---|---|
| M80 | - T7 | - W (White), B (Black) | 3K | - 36D |
| M80 | - T10 | - W (White), B (Black) | 3K | |

## Step 3: Select your Driver

| | TRIAC Dimmable | Dali | Casambi |
|---|---|---|---|
| M80-T7 | DCC260-DX-12W | DCC180500-DD-1012W @ 260mA | DCC260700-CAS-1325W @ 260mA |
| M80-T10 | DCC350-DX-20W | DCC260700-DD-1625W @ 350mA | DCC150500-CAS-712W @ 350mA |

**Configuration Example:** For a Trimless Single M80-T7 Adjustable Highlighter in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F80-TL-R (2) Light Module: M80-T7-W3K-36D (3) Dimmable Driver: DCC260-DX-12W.