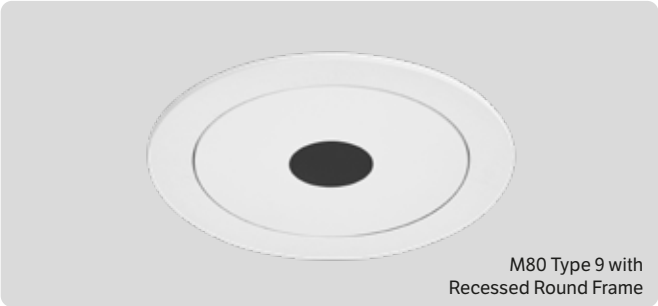




M80 Type 9 with
Recessed Round Frame



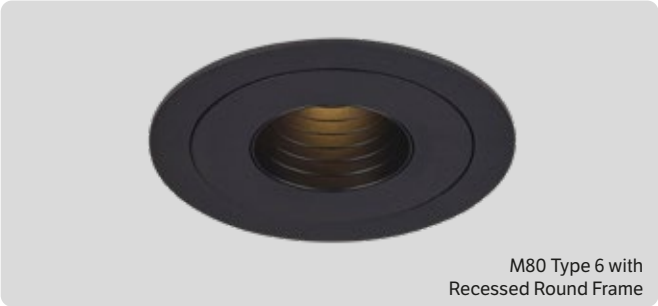
M80 Type 9 with
Trimless Frame

M80-T9 Type 9 - Pinpoint

Watts 12W / 350mA DC **Lumens** 570lm

Beam 24°





M80 Type 6 with
Recessed Round Frame



M80 Type 6 with
Trimless Frame

M80-T6 Type 6 - Black Hole

Watts 12W / 350mA DC **Lumens** 880lm

Beam 45°

Specifications


CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty


White


Black

Dimensions








M80-T9



M80-T6

Step 1: Choose Installation Frame

See pages 200-201 for frame details

	 Recessed Round	 Recessed Oval Double	 Recessed Square	 Recessed Rectangular Double	 Trimless	 Surface Cylinder
Dimensions	Ø102 x H62mm	L192 x W102 x H62mm	L102 x W102 x H62mm	L192 x W102 x H62mm	Ø170 x H68mm	Ø106 x H146mm
Cut Out	Ø95mm	2x 95mm @ 90mm centres	Ø95mm	2x 95mm @ 90mm centres	Ø130mm	-
White Code	F80-RR-W	F80-RR2-W	F80-RSQ-W	F80-RSQ2-W	F80-TL-R	SF80-RR-W
Black Code	F80-RR-B	F80-RR2-B	F80-RSQ-B	F80-RSQ2-B	-	SF80-RR-B

Step 2: Choose Module Type

Model	- Type	- Trim/Body Colour	CCT	- Beam
M80	- T9	- W (White), B (Black)	3K	- 24D
M80	- T6	- W (White), B (Black)	3K	- 45D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M80-T9	DCC350-DX-20W	DCC260700-DD-1625W @ 350mA	DCC260700-CAS-1325W @ 350mA
M80-T6	DCC350-DX-20W	DCC260700-DD-1625W @ 350mA	DCC260700-CAS-1325W @ 350mA

Configuration Example: For a Trimless Single M80-T9 Pinpoint in Black and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F80-TL-R. (2) Light Module: M80-T9-B3K-24D (3) Dimmable Driver: DCC350-DX-20W