




R534	Mini Fixed
Dimensions D46 x 105mm	Cut Out Ø 40mm
Watts 8W	Lumens <580lm
Beam 24°	



R535	Small Fixed
Dimensions D66 x H72mm	Cut Out Ø 60mm
Watts 11W	Lumens <760lm
Beam 40°	

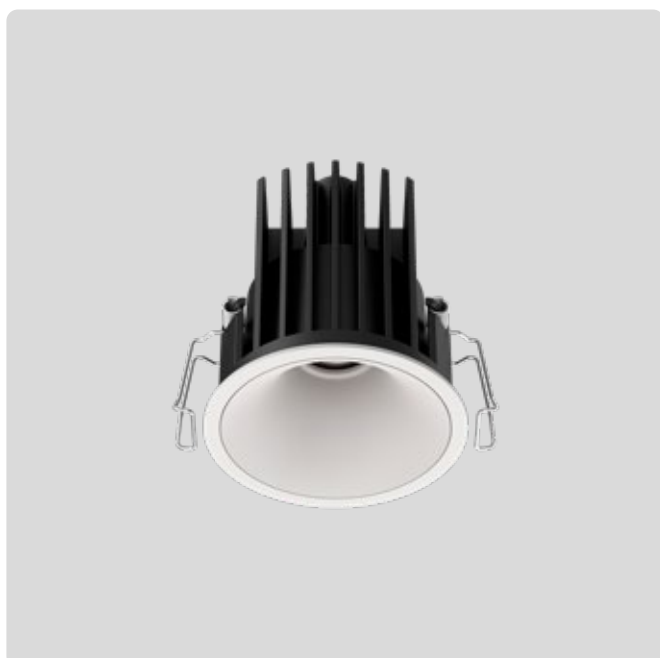

R536	Medium Fixed
Dimensions D83 x H85mm	Cut Out Ø 76mm
Watts 14W	Lumens <1065lm
Beam 40°	




R537	Large Fixed
Dimensions D106 x H110mm	Cut Out Ø 100mm
Watts 20W	Lumens <1480lm
Beam 40°	

**Specifications**

Input	240V AC
Colour Temp	3000K
CRI	CRI97
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19
Binning	2-Step SDCM
Material	Aluminium, glass
IP Rating	IP43
Clearance	R534 R535 R536: 25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements. R537: 25mm from heatsink to building elements.
Classification	IC Rated
Driver	Included
Dimming/Control	TRIAC Dimmable (Dali and Casambi available on request)
TLAs	"Flicker-free", PstLM ≤ 1.0 ; SVM ≤ 0.4
Installation	Slim trim, cut holes with extra care
Application	Interior, recessed
Warranty	5 Year Warranty

Lumens

	White	Gold	Silver	Black	High Gloss Black
R534	580lm	550lm	560lm	530lm	550lm
R535	760lm	740lm	770lm	725lm	750lm
R536	1065lm	1025lm	1065lm	1000lm	1040lm
R537	1480lm	1450lm	1520lm	1345lm	1340lm

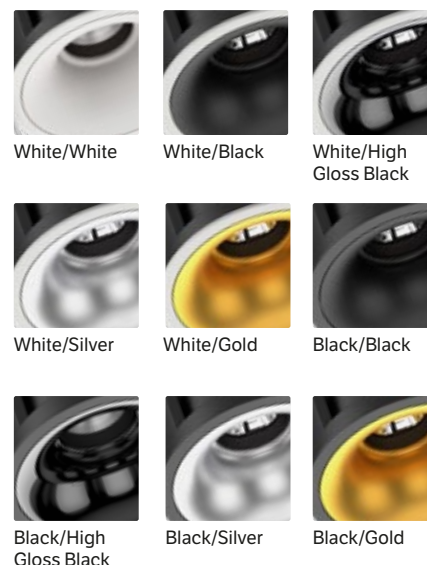**Colour Parameters**

Model	CRI	CRI R9	TM30 Rf	TM30 Rg
R534	98.0	99.1	95.3	102.7
R535	97.5	95.7	94.6	102.6
R536	97.8	97.9	94.4	102.9
R537	97.8	97.5	94.7	102.8

Intensity

(3000K, White reflector)

Model	At 2m	At 3m	At 4m
R534	529 lux / 1m beam width	235 lux / 1.4m beam width	132 lux / 2.4m beam width
R535	336 lux / 1.7m beam width	149 lux / 2.5m beam width	84 lux / 4.2m beam width
R536	433 lux / 1.6m beam width	193 lux / 2.5m beam width	108 lux / 4.1m beam width
R537	560 lux / 1.8m beam width	249 lux / 2.7m beam width	140 lux / 4.6m beam width

Available In

Model	-	Trim Colour	Reflector Colour	CCT	-	Dimming	-	Beam
R534	-	W (White), B (Black)	W (White), B (Black), HGB (High Gloss Black), S (Silver), G (Gold)	3K	-	D (Dimmable)	-	24D
R535	-	W (White), B (Black)	W (White), B (Black), HGB (High Gloss Black), S (Silver), G (Gold)	3K	-	D (Dimmable)	-	40D
R536	-	W (White), B (Black)	W (White), B (Black), HGB (High Gloss Black), S (Silver), G (Gold)	3K	-	D (Dimmable)	-	40D
R537	-	W (White), B (Black)	W (White), B (Black), HGB (High Gloss Black), S (Silver), G (Gold)	3K	-	D (Dimmable)	-	40D

Example code = **R535-BS3K-D-40D**

(11W, Small Fixed, Round, Black trim, Silver reflector, dimmable, 3000K, 40° beam).