

Exterior Recessed Multi-Use Halo

X62



SPECIFICATIONS	
DIMENSIONS	D55 x H90mm
CUT OUT	Ø43mm
COLOUR TEMP	2700K
LUMENS	Ambient light source
CRI	>80
LIFESPAN	40,000hrs (L80 B10)
BEAM ANGLE	360°
MATERIAL	316 Stainless Steel or Copper
IP RATING	IP67
IK RATING	IK10
CLASSIFICATION	IC-F Rated
CLEARANCE	0mm, zero clearance required
DRIVER	Sold separately (8-25V Constant Voltage)
DIMMABLE	Non-dimmable
APPLICATION	Exterior and interior multi-use
WEIGHT CAPACITY	<2000kg
COMPLETE WITH	500mm feed cable. Single colour pre-wired with quick connect IP67 plug. See wiring accessories for compatible extensions/sockets.
WARRANTY	5 Year Warranty

2.5
WATTS


8-25V
PARALLEL

Driver sold separately, specify when ordering.

ACCESSORIES

Installation housings, feed cables, loop/extension cables, two way and three way spot sockets available. See accessories page for further details.

AVAILABLE IN	
Example code = X62-ST527K (Halo, 316 STS, 2700K).	
Model	- Finish
X62 (Halo)	-
	B = Black
	COP = Copper
	STS = 316 Stainless Steel
	Colour Temp
	27K = 2700K

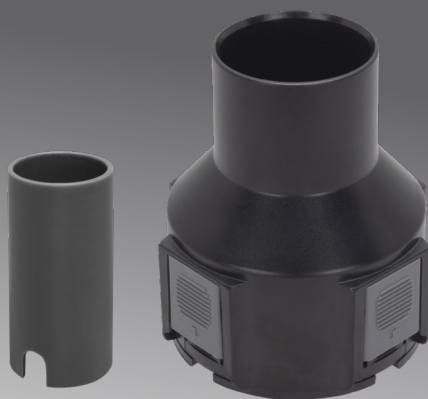**WIRING ACCESSORIES**

Suitable for Single Colour fittings only, not compatible with RGBW

DESCRIPTION	X25-X32 CODE	X55-X62 CODE
1m Feed Cable	X25-FC1M	EX110 FC1M
10m Feed Cable	X25-FC10M	EX110 FC10M
1.5m Loop/Extension Cable	X25-LC1.5M	EX110 LC1.5M
2m Loop/Extension Cable	-	EX110 LC2M
3m Loop/Extension Cable	X25-LC3M	EX110 LC3M
5m Loop/Extension Cable	X25-LC5M	EX110 LC5M
10m Loop/Extension Cable	X25-LC10M	EX110 LC10M
Two Way Spot Socket	X25-S2	EX110 S2
Three Way Spot Socket	X25-S3	EX110 S3



Feed Cable



Loop/extension Cable




EX110 S2




EX110 S3

HOUSING ACCESSORIES

DESCRIPTION	DIMENSIONS	CODE
X25-X32 In-wall Installation Sleeve	D22 x H50mm Cut out: Ø23mm	X25-IWS
X55-X62 In-wall Installation Sleeve	D47 x H95mm Cut out: Ø48mm	X55-IWS
X55-X62 Inground Installation Housing	D88 x H97mm Cut out: Ø90mm	X55-IGH



X25-IWS



X55-IGH