




X980	Elbow
Dimensions W40 x H50 x D40mm	Beam 42°
Watts 1.5W	Lumens 110lm



X981	Wedge
Dimensions W50.6 x H45 x D45mm	Beam 42°
Watts 1.5W	Lumens 110lm




X982	Dome
Dimensions W68 x H45.5 x D39mm	Beam 42°
Watts 1.5W	Lumens 110lm

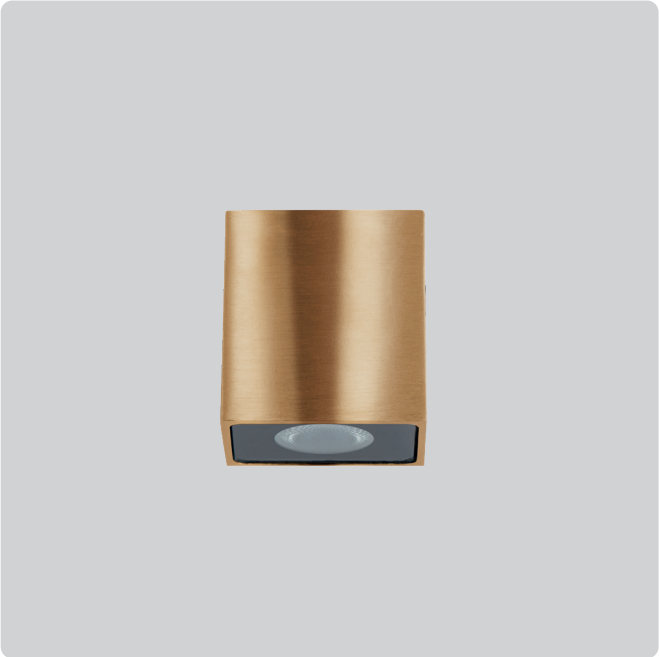

X983	Block
Dimensions W40 x H45 x D45mm	Beam 42°
Watts 1.5W	Lumens 110lm

Specifications

Input	24V DC Constant Voltage
Colour Temp	2700K
CRI	90
Lifespan	65,000hrs (L90)
Binning	SDCM 3
Material	316 Stainless Steel or Brass
IP Rating	IP65
Driver	Sold separately
Dimming/Control	Non-dimmable
Termination	Prewired with 2000mm feed, see image
Application	Exterior, surface mount
Warranty	5 Year Warranty

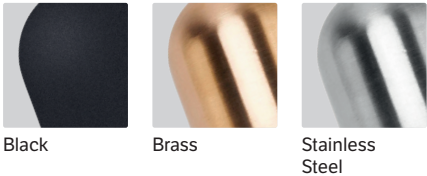

Available In

Description	Code
X980 - Elbow	
Black 316 STS	X980-B27K
Brass	X980-BR27K
316 STS	X980-SS27K
X981 - Wedge	
Black 316 STS	X981-B27K
Brass	X981-BR27K
316 STS	X981-SS27K
X982 - Dome	
Black 316 STS	X982-B27K
Brass	X982-BR27K
316 STS	X982-SS27K
X983 - Block	
Black 316 STS	X983-B27K
Brass	X983-BR27K
316 STS	X983-SS27K



Mini Mariner Series can be terminated either remotely via 2000mm feed cable or internally via rear of fitting. Installation note: Rear cavity is very low profile and requires IP65+ thick wall lined heat shrink connection. See installation instructions for further details.