Bullet Male Insulated Connector 5mm Blue DG



Application

Provides a quick and reliable disconnect for electrical wiring systems.

Design Specifications

- Material:
- Conductor: Brass Strip H62/C28000
- Copper sleeve: Copper Tubular T2/C11000
- Insulation: PVC
- Treatment: Tin-Plated




Compliance

- UL 486A-486B
- CSA C22.2 No.65-13
- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Type	Colour	Section (mm^2)	L (mm)	d1(mm)	Thickness (mm)	QTY	Packaging Type
HAMBICM5	Male Bullet Connector	Blue	1.5 - 2.5	22.5	2.3	0.4	50	Plastic Box

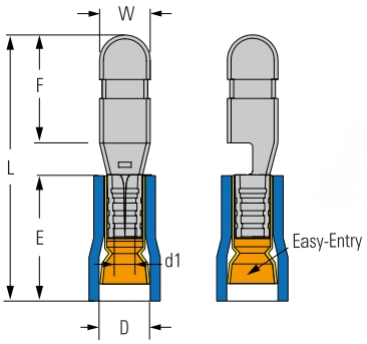

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.057
Gross Weight (kg): 0.097

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 0.567
Gross Weight (kg): 0.1.094

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 5.665
Gross Weight (kg): 11.165