Bootlace Pin 0.25mm² Violet





Application

Professional wire-end termination for reliable electrical joints.

Design Specifications


- Material:
- Conductor: Copper Tubular T2/C11000
- Insulation: Nylon
- Treatment: Tin-Plated

Compliance

- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Colour	Section (mm²)	L (mm)	F (mm)	C (mm)	QTY	Packaging Type
HAMBLP025	Violet	0.25	10.5	6.0	0.8	100	Plastic Box

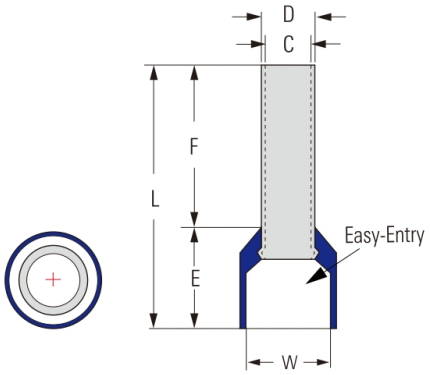

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.004
Gross Weight (kg): 0.044

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 0.038
Gross Weight (kg): 0.565

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 0.381
Gross Weight (kg): 5.881