Bootlace Pin 0.75mm² Blue





Application

Professional wire-end termination for reliable electrical joints.

Design Specifications


- Material:
- Conductor: Copper Tubular T2/C11000
- Insulation: Nylon
- Treatment: Tin-Plated

Compliance

- UL 486F
- CSA C22.2 No.291-14
- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Colour	Section (mm²)	L (mm)	F (mm)	C (mm)	QTY	Packaging Type
HAMBLP075	Blue	0.75	14.0	8.0	1.25	100	Plastic Box

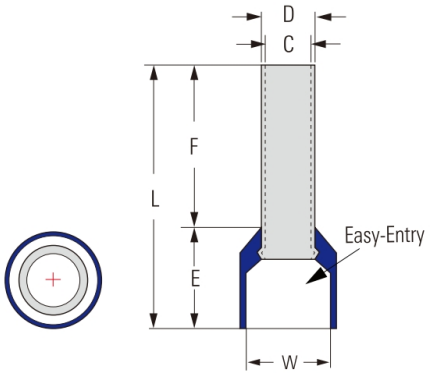

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.007
Gross Weight (kg): 0.047

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 0.074
Gross Weight (kg): 0.601

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 0.742
Gross Weight (kg): 6.242