Inline Splice Yellow



Application

Tinned copper inline splice for secure, low-resistance electrical connections.

Design Specifications

- Material:
- Conductor: Brass Strip T2/C11000
- Insulation: PVC
- Treatment: Tin-Plated




Compliance

- UL 486A-486B
- CSA C22.2 No.65-13
- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Type	Colour	Section (mm^2)	L (mm)	D (mm)	d (mm)	QTY	Packaging Type
HAMINSYE	Inline Splice Terminal	Yellow	4 - 6	27.0	6.7	3.4	50	Plastic Box

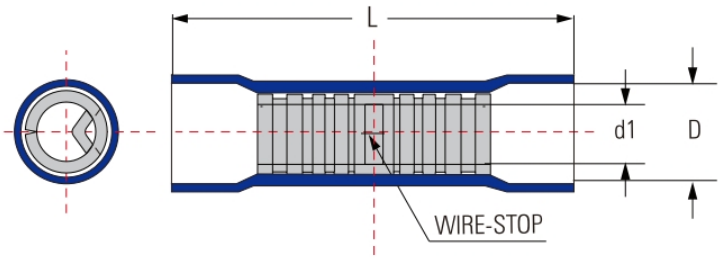

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.103
Gross Weight (kg): 0.143

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 1.032
Gross Weight (kg): 1.559

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 10.324
Gross Weight (kg): 15.824