Quick Connector Female Fully Insulated 6.4mm x 0.8mm Blue DG



Application

Fully insulated female quick connector for safe and secure electrical connections.

Design Specifications

- Material:
- Conductor: Brass Strip H62/C11000
- Copper sleeve: Copper Tubular T2/C11000
- Insulation: PVC
- Treatment: Tin-Plated
- With copper sleeve on barrel




Compliance

- UL 310 AND CAN
- CSA C22.2 No.153-09
- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Type	Colour	Section (mm^2)	W (mm)	L (mm)	D (mm)	d1 (mm)	QTY	Packaging Type
HAMQCIF64BL	DG Female Quick Connector	Blue	1.5 - 2.5	6.6	23.5	4.7	2.3	100	Plastic Box

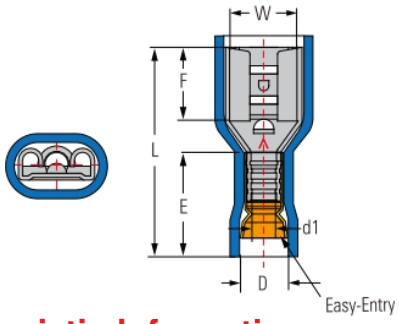

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.140
Gross Weight (kg): 0.180

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 1.403
Gross Weight (kg): 1.930

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 14.028
Gross Weight (kg): 19.528