Quick Connector Male Tab 6.4mm x 0.8mm Yellow DG



Application

Male quick tab connector made from tinned brass for reliable electrical connections.

Design Specifications

- Material:
- Conductor: Brass Strip H62/C11000
- Copper sleeve: Copper Tubular T2/C11000
- Insulation: PVC
- Treatment: Tin-Plated
- With copper sleeve on barrel




Compliance

- UL 310 AND CAN
- CSA C22.2 No.153-09
- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Type	Colour	Section (mm^2)	W (mm)	L (mm)	D (mm)	d1 (mm)	QTY	Packaging Type
HAMQCMT64YE	DG Male Tab Quick Connector	Yellow	4 - 6	6.4	25.0	6.3	3.4	100	Plastic Box

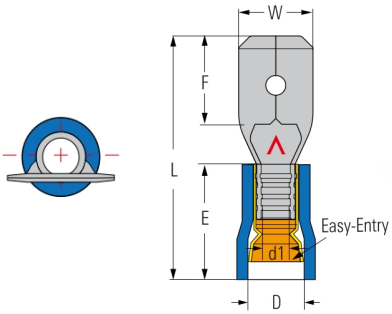

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0. 086
Gross Weight (kg): 0.126

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 0.860
Gross Weight (kg): 1.387

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 8.601
Gross Weight (kg): 14.101