Inline Heatshrink Splice Blue



Application

Ideal for inline wire splicing, providing superior waterproof and insulating heat-shrink seals for long-term reliability in harsh environments.

Design Specifications

- Material:
- Conductor: Copper Tubular T2/C11000
- Insulation: Dual Wall Heat-Shrinkable Tube
- Treatment: Tin-Plated




Compliance

- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IE C62321

General Information

Part No.	Type	Colour	Section (mm^2)	L (mm)	D (mm)	d (mm)	QTY	Packaging Type
HAMTWSBL	Waterproof Heat Shrinkable Terminal	Blue	1.5 - 2.5	36	5.7	2.3	50	Plastic Box

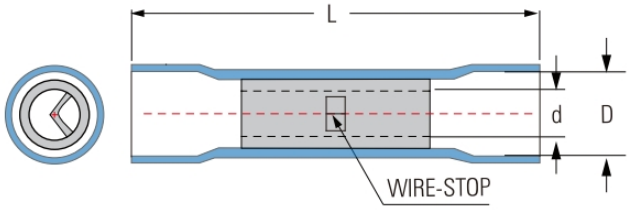

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.069
Gross Weight (kg): 0.109

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 0.686
Gross Weight (kg): 1.213

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 6.864
Gross Weight (kg): 12.364