


Surface Mount Button
Glow Dual CCT Triple Wattage + Uplight

LED360

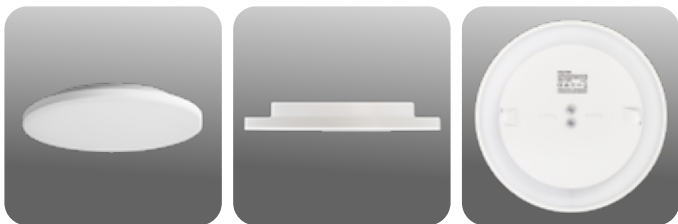

SPECIFICATIONS

DIMENSIONS	D300 x H39mm
CUT OUT	N/A (Surface Mount)
COLOUR TEMP	Selectable 3000K Warm White or 4000K Natural White
LUMENS	Selectable 10W/1000lm, 18W/1800lm or 24W/2300lm (default factory setting)
CRI	90 (R9 <80)
LIFESPAN	>60,000 (L80 B50)
BEAM ANGLE	110°
MATERIAL	PC + Aluminium
IP RATING	IP20
IMPACT RATING	IK08
DRIVER	Incorporated, Dimmable
ELECTRICAL CLASS	Class II - double insulated
APPLICATION	Horizontal Surface Mount
POWER FACTOR	0.95
WARRANTY	5 Year Warranty

<2300
LUMENS

<24
WATTS

AC
240V

AVAILABLE IN

DESCRIPTION	CODE
White, 3000K/4000K "Select" Dual Colour, Triple Wattage, Dimmable	LED360 W34A



select **W**

select **CCT**

LED360 Glow is dimmed and
switched as a single light source.
Uplight component cannot be
independently controlled.