

VOLTAGE TESTERS



NCVT-3P
Dual Range Non-Contact
Voltage Tester with Flashlight



Klein Tools Offers a Range of NCVT's to Suit your Application


Our NCVT products are lightweight, compact tools with pocket clips to provide quick access at any jobsite. Testers deliver simultaneous visual and audible voltage indicators when AC voltage is detected. Meets CAT IV 1000V safety standard. Comes with 2x AAA batteries and auto power-off feature conserves and extends battery life. Perfect for working on sites from small residential developments to large-scale commercial projects.



NCVT-1
DETECTS: 50-1000V AC
Detect AC voltage in cables, cords, circuit breakers, lighting fixtures, switches, outlets and wires.



NCVT-4IR
DETECTS: 12-1000V AC
Designed specifically for HVAC applications. This 4:1 distance-to-spot ratio IR thermometer measures from -22 to 482° F (-30 to 250° C). Use convenient laser pointer to target measurement area for temperature measurement.



NCVT-5A
DETECTS: 12-1000V AC and 70-1000V AC
Select between dual ranges for optimal testing. Select 12 to 1000V AC which is perfect for low voltage systems such as doorbells, environmental control or irrigation systems, or select 70 to 1000V AC which is perfect for detecting systems such as electrical mains supply. Bright integrated laser pointer identifies objects of interest at distance on the jobsite.



NCVT-6
DETECTS: 12-1000V AC
Incorporates a 66-Foot (20 m) Laser Distance Meter that can measure in meters, inches with decimals, inches with fractions, feet with decimals, or feet with fractions. The laser distance meter functions independently from the NCVT with a simple-to-use intuitive interface.


Cat. No.	UPC# 9-82544+	Batteries	Length	Width	Depth	Weight (oz.)
NCVT-1	69009-6	2 x AAA	5.9" (14.0 cm)	0.72" (1.8 cm)	1.00" (2.5 cm)	0.8 oz (22.7 g)
NEW NCVT-2P	69230-1	2 x AAA	5.8" (14.8 cm)	0.86" (2.2 cm)	1.09" (2.8 cm)	1.7 oz (48.1 g)
NEW NCVT-3P	69234-6	2 x AAA	5.7" (14.5 cm)	0.92" (2.4 cm)	1.09" (2.8 cm)	1.7 oz (48.1 g)
NCVT-4IR	69061-7	2 x AAA	6.25" (15.9 cm)	1.19" (3.0 cm)	1.25" (3.2 cm)	2.0 oz (57.0 g)
NCVT-5A	69294-9	2 x AAA	6.00" (15.2 cm)	1.16" (2.9 cm)	0.96" (2.4 cm)	1.5 oz (43.0 g)
NCVT-6	69253-3	2 x AAA	6.45" (16.4 cm)	1.32" (3.4 cm)	1.21" (3.1 cm)	2.5 oz (72.0 g)

See our complete line of Test & Measurement Products
www.kleintools.com



© 2020 Klein Tools, Inc.
Manufactured in the USA
82998 Rev. 05/20 A

NON-CONTACT

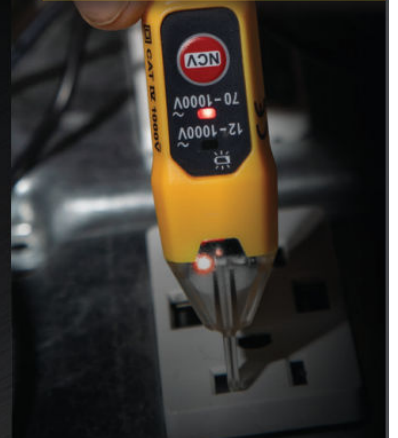


NCVT-2P
Dual Range Non-Contact
Voltage Tester

NCVT-2P

DUAL RANGE NON-CONTACT VOLTAGE TESTER

The **NCVT-2P** is a dual range non-contact voltage tester. The NCVT detects voltage from 70 to 1000V AC (in Range 1) or 12 to 1000V AC (in Range 2). Updated screw-cap battery compartment, heavy-duty pocket clip, and recessed buttons increase product durability. Enhanced LED interface makes the product easy-to-understand; light indicator clearly marks range being used for testing.

70 – 1000V AC
DUAL-RANGE
12 – 1000V AC

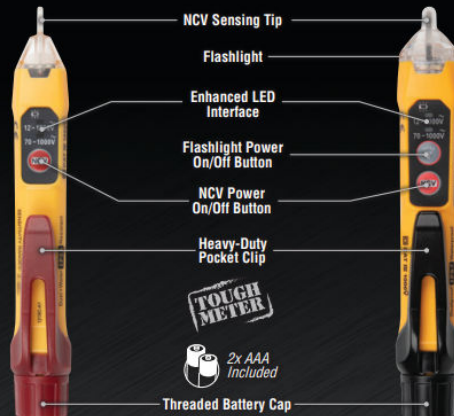

	NCVT-2P	FEATURES	NCVT-3P
		Enhanced LED Interface	
		Dual Range	
		Self-Test Function	
		Threaded Screw Cap	
		Heavy-Duty Pocket Clip	
	Range 1: 70-1000V AC Range 2: 12-1000V AC	Voltage (Volts)	Range 1: 70-1000V AC Range 2: 12-1000V AC
	IP54	Ingress Protection	IP67
	CAT IV 1000V, CE	Safety	CAT IV 1000V, CE
	50-500Hz	Frequency Range	50-500Hz
		Audible and Visual Alarms	
		APO Auto-Power Off	
		Flashlight	
	2 x AAA	Batteries Included	2 x AAA
QUICK START GUIDE	RANGE	INDICATORS	POWER – ON
		Visual on Tip	12 – 70V AC
	Range 1 70 – 1000V	Visual on Tester	70 – 1000V AC
		Audible	No detection in this range
		Single Beep	Continuous Beep
	Range 2 12 – 1000V	Visual on Tip	
		Visual on Tester	
		Audible	Pulsing Beep
		Single Beep	Continuous Beep

NCVT-3P

DUAL-RANGE NON-CONTACT VOLTAGE TESTER WITH FLASHLIGHT

The **NCVT-3P** is a dual range non-contact voltage tester with an integrated flashlight that can be used independent of the voltage detection function. The NCVT can be set to detect voltage from 70 to 1000V AC (in Range 1) or 12 to 1000V AC (in Range 2). Enhanced LED interface makes the product easy-to-understand; light indicator clearly marks range being used for testing.

70 – 1000V AC
DUAL-RANGE
12 – 1000V AC

