



Open for Wiring

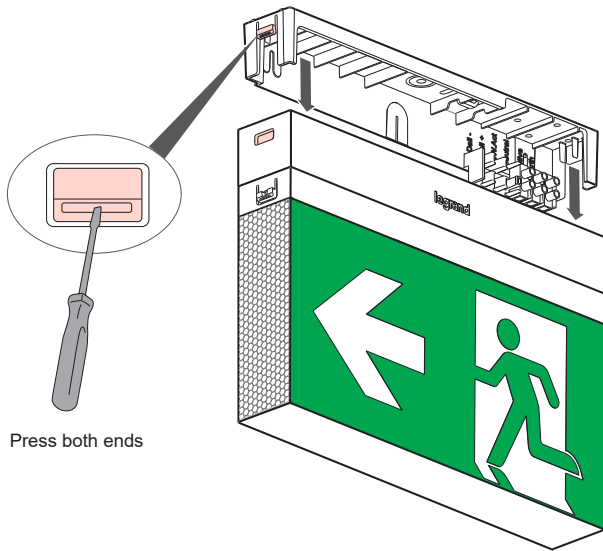


Press both ends



Ceiling mount

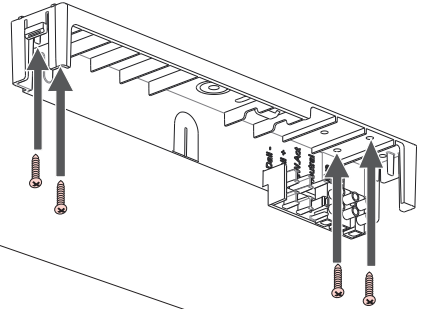

Wall mount

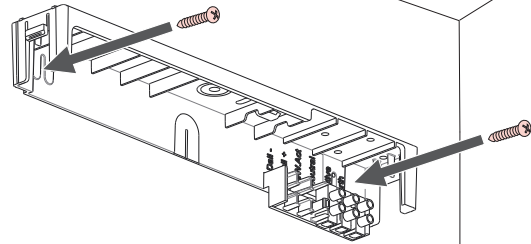


Wire connection

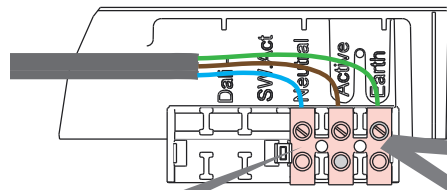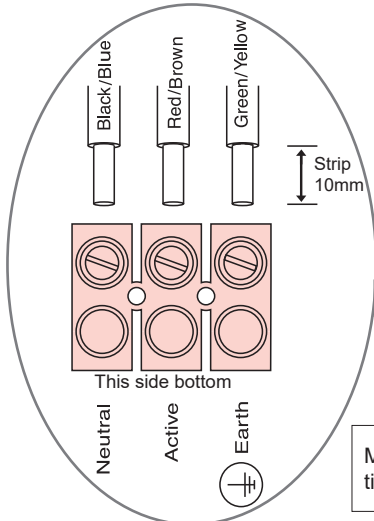


Terminal block should be placed as shown above.

Mains supply wiring terminals should be tightened between 0.4 Nm to 0.6 Nm.


Ceiling mount wire entry

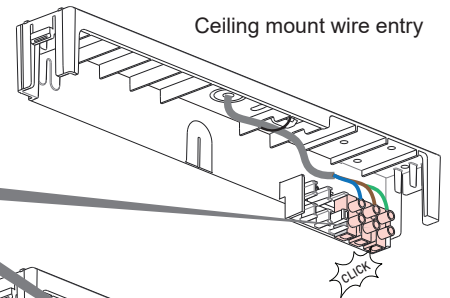


Wall mounting knockout (option)

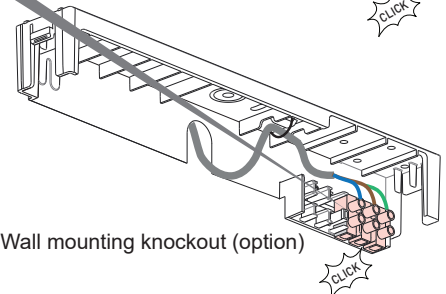



Changing decals

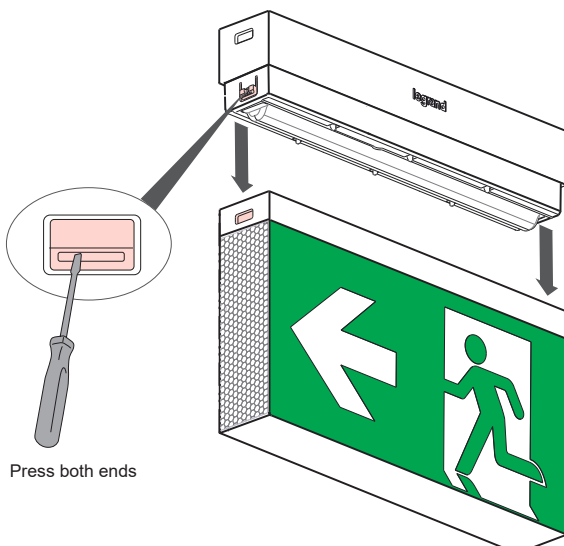

Press both ends

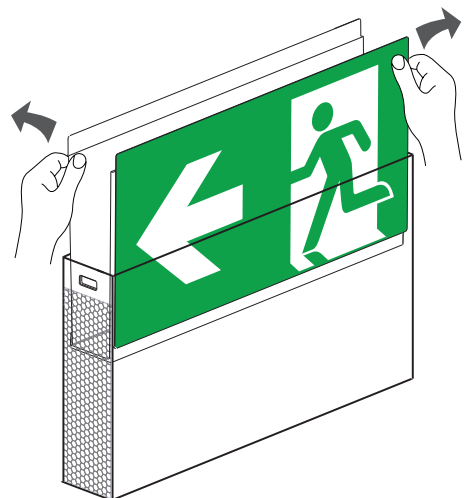


■ Slide the Opal diffuser up then remove the decals and replace as required.

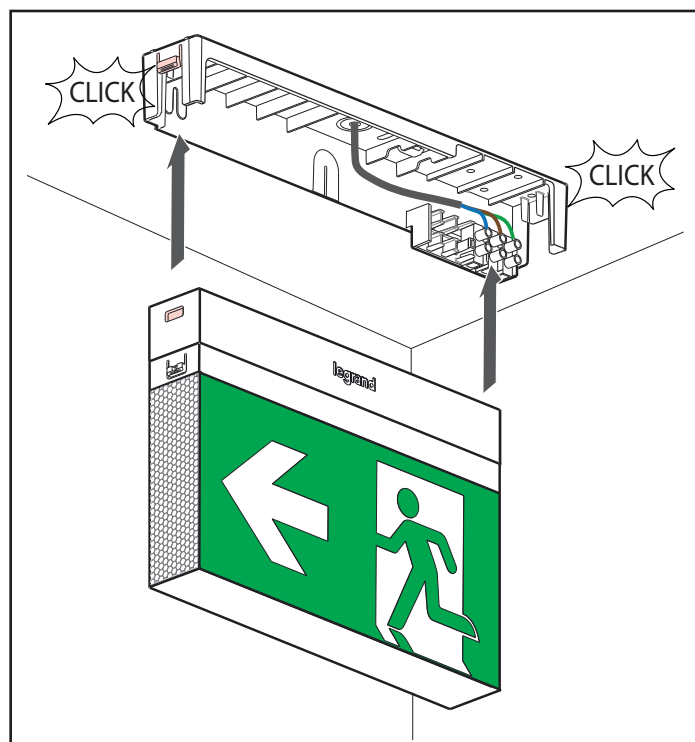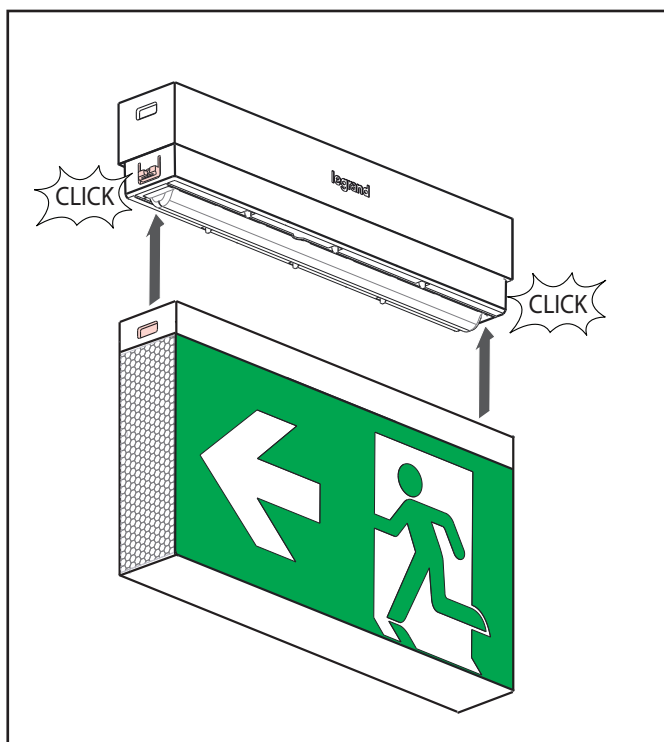


Accessories

Suspension Rod kit

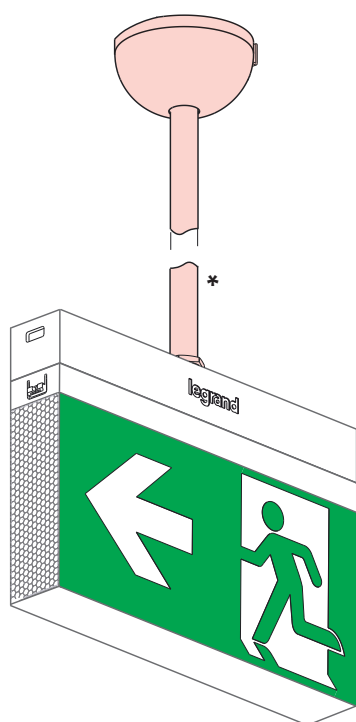


*Refer to datasheet for the length of the suspension rod.

Anti-tamper kit (Cat.No: 659460)

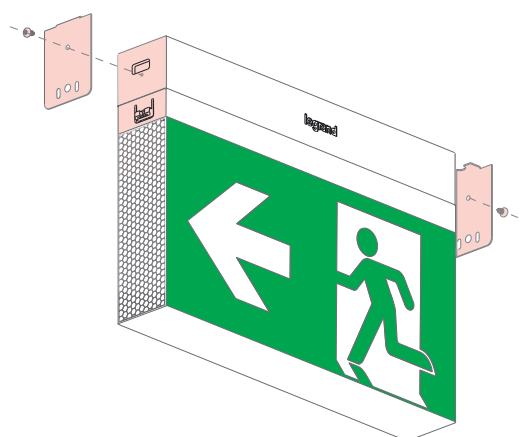


- On both sides, mark the pilot hole (Ø 2.5mm) into the housing using the brackets provided. Then fix the brackets with screws.

Wall L- bracket (Cat.No: 659459)

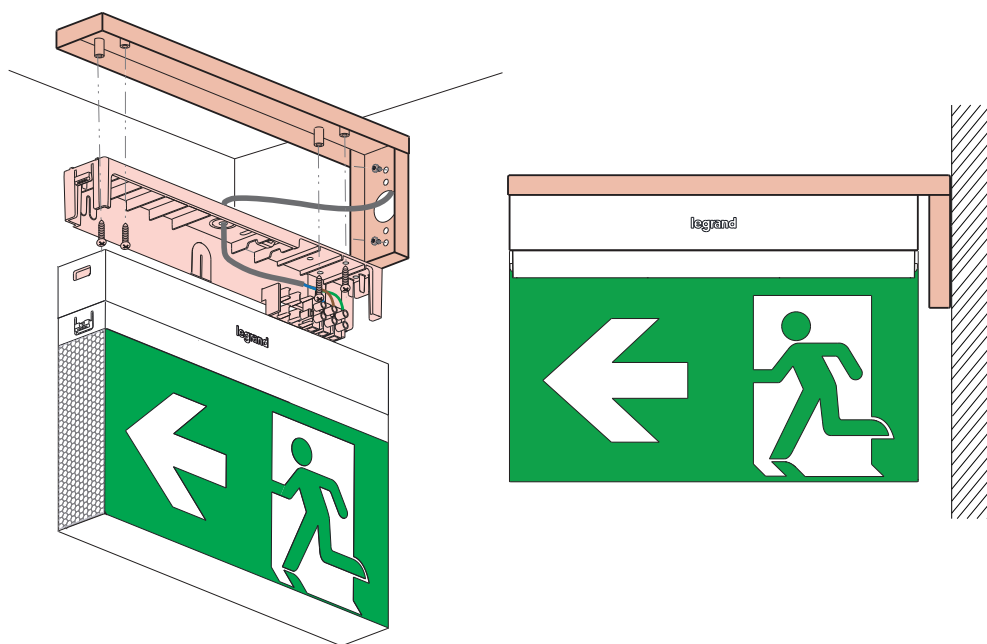


Wire suspension kit (Cat.No: 686216)

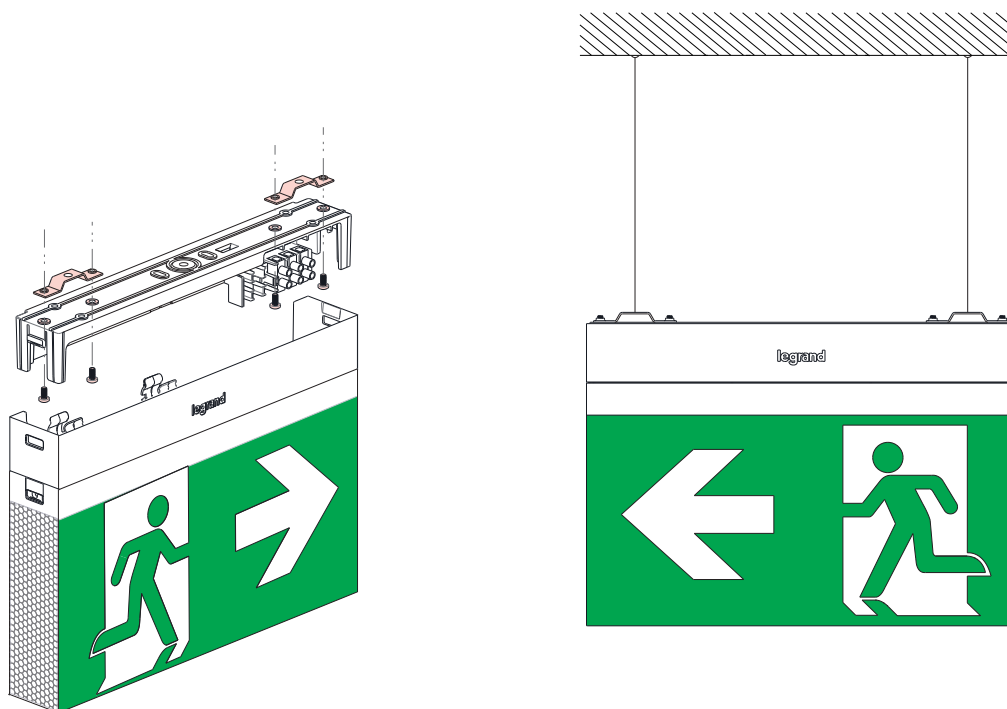


Fix the screws from inside (screws provided with the kit)

Open for Wiring

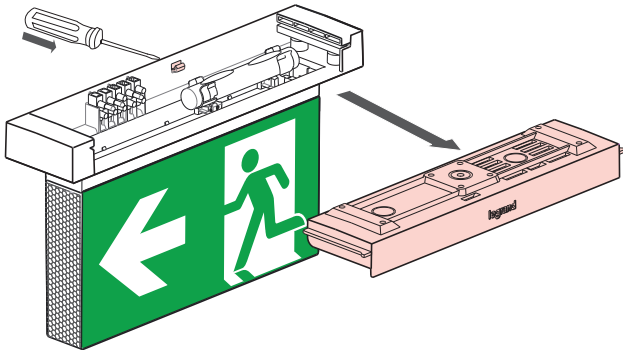

Ceiling mount

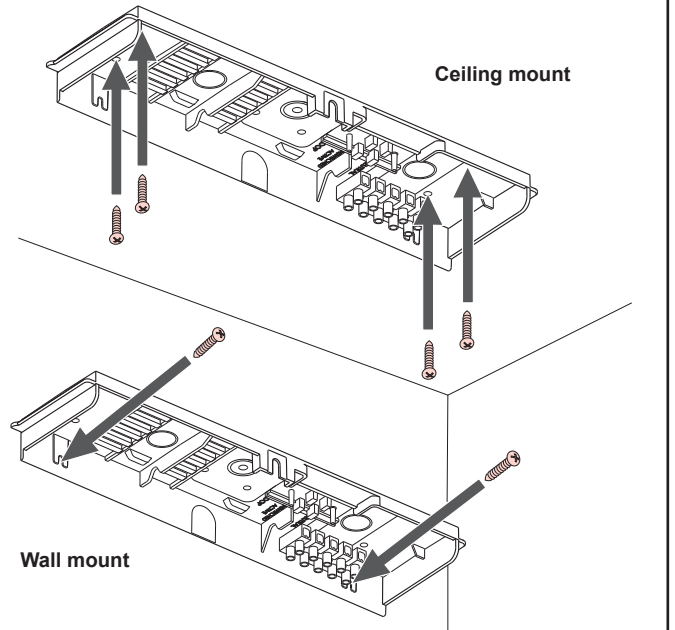

Wall mount


Wire connection

Active		NOT CONNECTED
Neutral		Black/Blue
Earth		Green/Yellow
Unswitched Active		Red/Brown
Loop		NOT CONNECTED


Strip 10mm

Mains supply wiring terminals should be tightened between 0.4 Nm to 0.6 Nm.



Ceiling mount wire entry

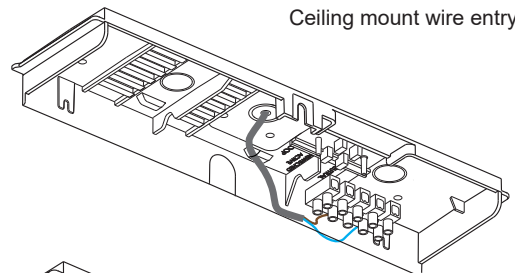



Wall mounting knockout (option)

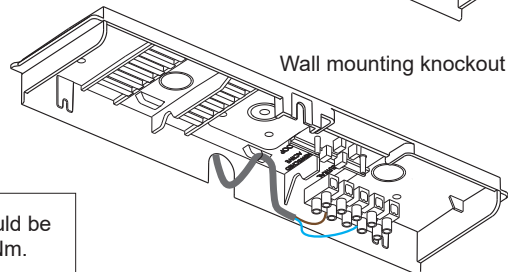

Changing decals

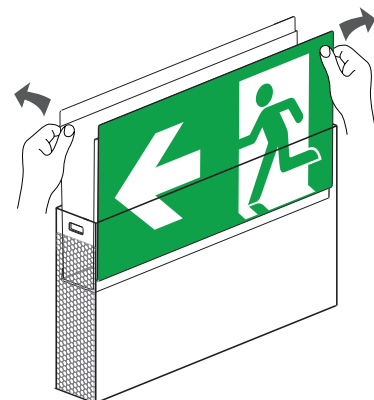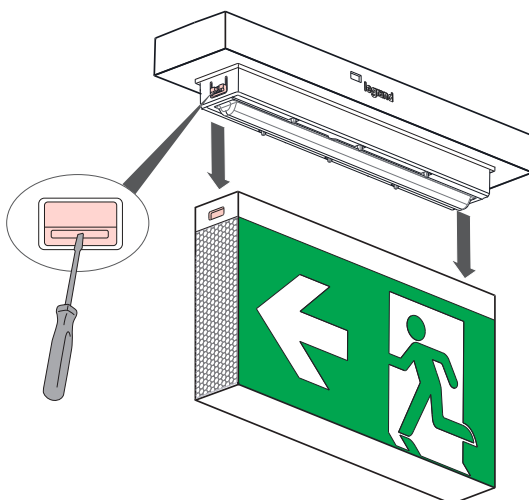


- Slide the Opal diffuser up then remove the decals and replace as required.

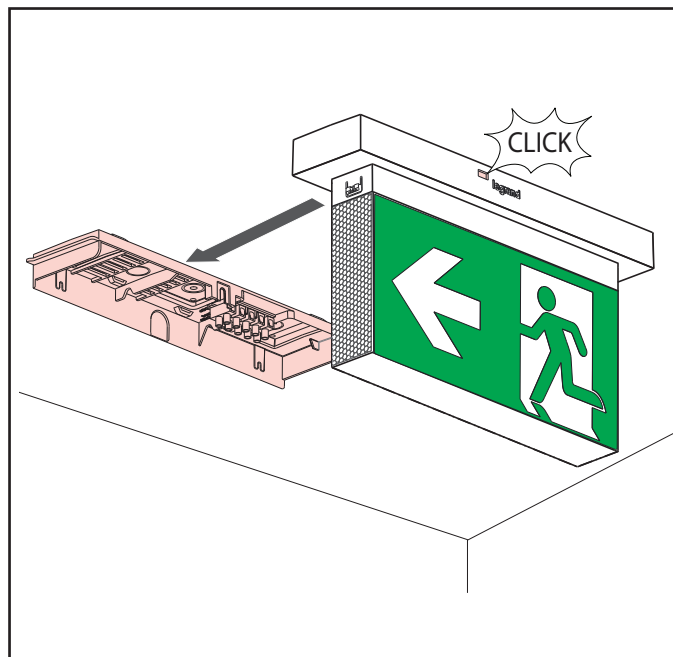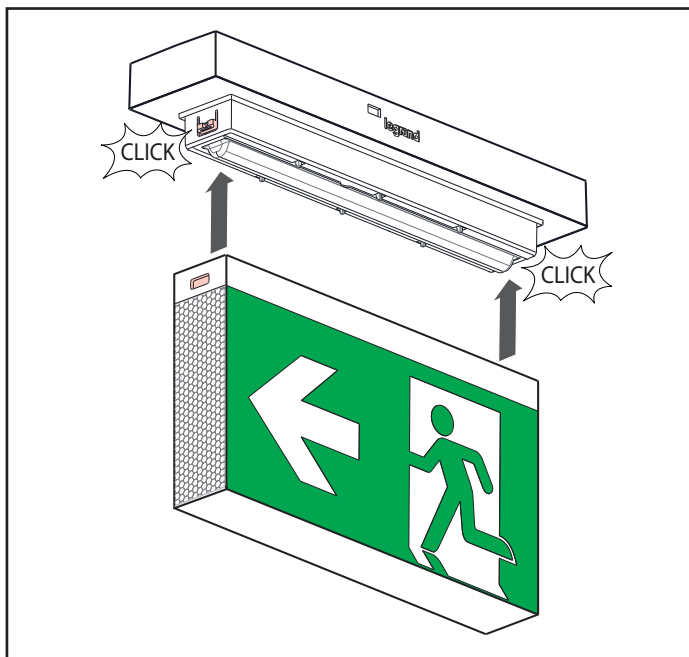


Accessories

Wall L- bracket (Cat.No: 686215)

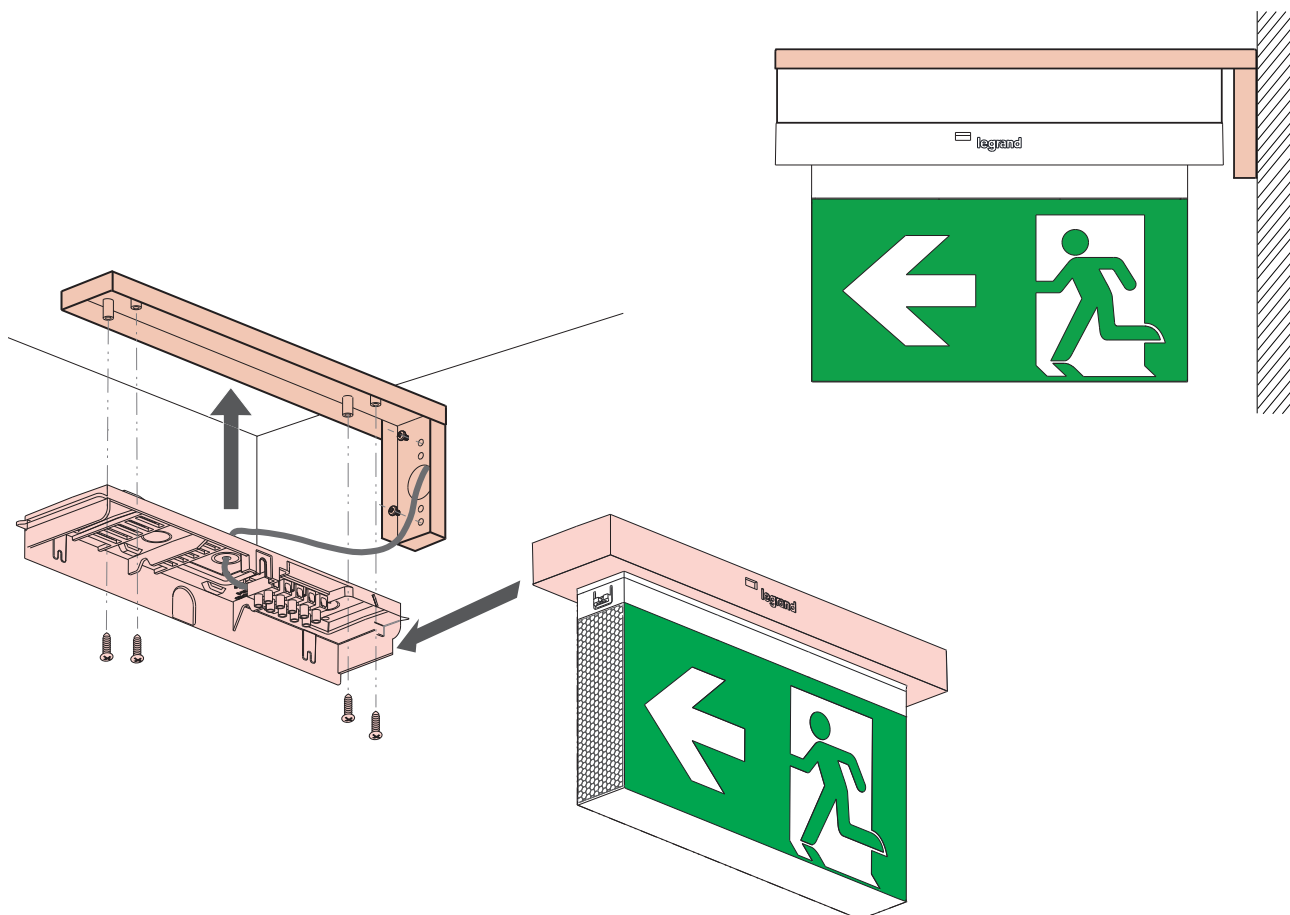


Anti-tamper kit (Cat.No: 659460)

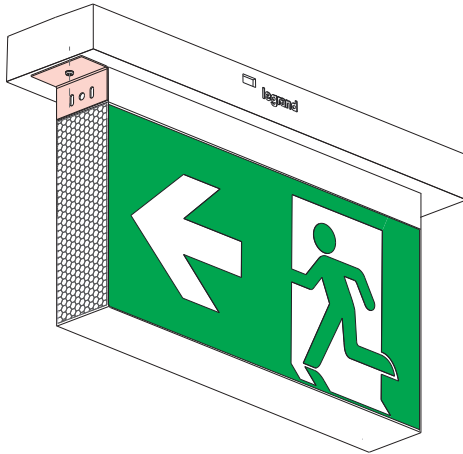

- On both sides, mark the pilot hole ($\varnothing 2.5\text{mm}$) into the housing using the brackets provided. Then fix the brackets with screws.



Rod suspension kit

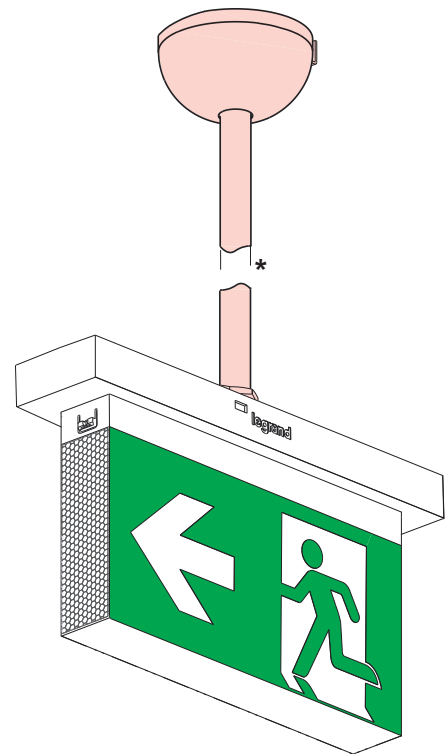

*Refer to datasheet for the length of the suspension rod.

Wire suspension kit (Cat.No: 686216)

Bracket

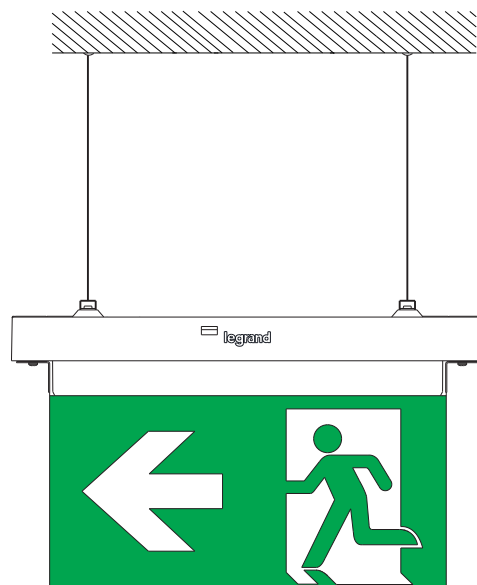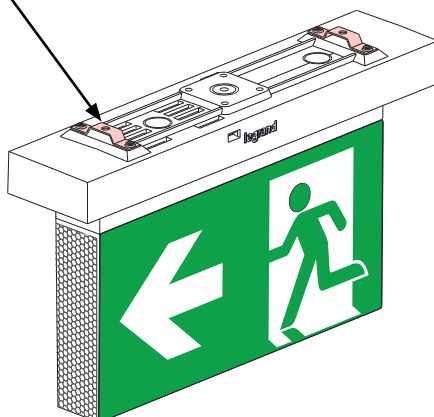

Fix the screws from inside (screws provided with the kit)