

Datasheet

LEANA - Slim LED Floodlights


CAT NO. **LFL0510BL**, **LFL0520BL**, **LFL0530BL**,
LFL0540BL, **LFS0520BL**, **LFS0530BL**



Cat No	LFL0510BL	LFL0520BL	LFL0530BL	LFL0540BL	LFS0520BL	LFS0530BL
Supply Voltage	230-240V a.c 50Hz					
CCT	4000K					
Colour Rendering Index (CRI)	70+					
Efficacy	80 lm/W		100 lm/W		80 lm/W	100 lm/W
Standby Power	N/A				< 1.0W	
Beam Angle	110°					
Tilt Angle	130°					
Lifespan	25,000hrs @ 25°C					
IP Rating	IP65					
Detection Range	N/A				6M	
Detection Method	N/A				6M (Max) 360° SCAN	
Switching Function	N/A				Auto	
Time Delay	N/A				5 minutes	
Lux Sensitivity	N/A				20-50 lx (Auto)	
Length of Power Cord	300mm					
Input Power	8W	15W	20W	30W	15W	20W
Lumens Output	650lm	1200lm	2000lm	3000lm	1200lm	2000lm
Weight	280g	335g	560g	800g	335g	560g
Warranty	5 years					

LEANA - Slim LED Floodlights

CAT NO. **LFL0510BL**, **LFL0520BL**, **LFL0530BL**,
LFL0540BL, **LFS0520BL**, **LFS0530BL**

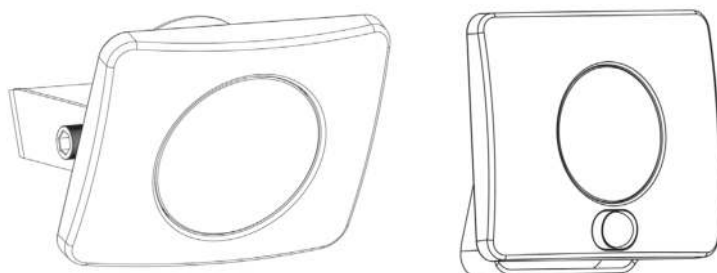

- Ideal for outdoor areas such as driveways
- Die cast aluminium construction
- Adjustable head up to 130°
- IP65 weatherproof
- Up to 3000 lumens
- High efficiency up to 100 lm/w

Cat No.	Dimensions (W x H x D)	Single Barcode	Outer Barcode	Outer Quantity
LFL0510BL	96 x 77 x 42mm	9321001465119	9321001465171	36
LFL0520BL	121 x 98 x 44mm	9321001465126	9321001465188	36
LFL0530BL	150 x 120 x 48mm	9321001465133	9321001465195	20
LFL0540BL	189 x 145 x 52mm	9321001465140	9321001465201	16
LFS0520BL	121 x 98 x 44mm	9321001465157	9321001465218	36
LFS0530BL	150 x 120 x 48mm	9321001465164	9321001465225	20

Legrand - AUS
1300 369 777
www.hpm.com.au
ABN 31 000 102 661

Legrand - NZ
0800 476 009
www.hpm.co.nz

Refer to your group buying office, Legrand Sales Representative or
Legrand Sales Office for pricing.